



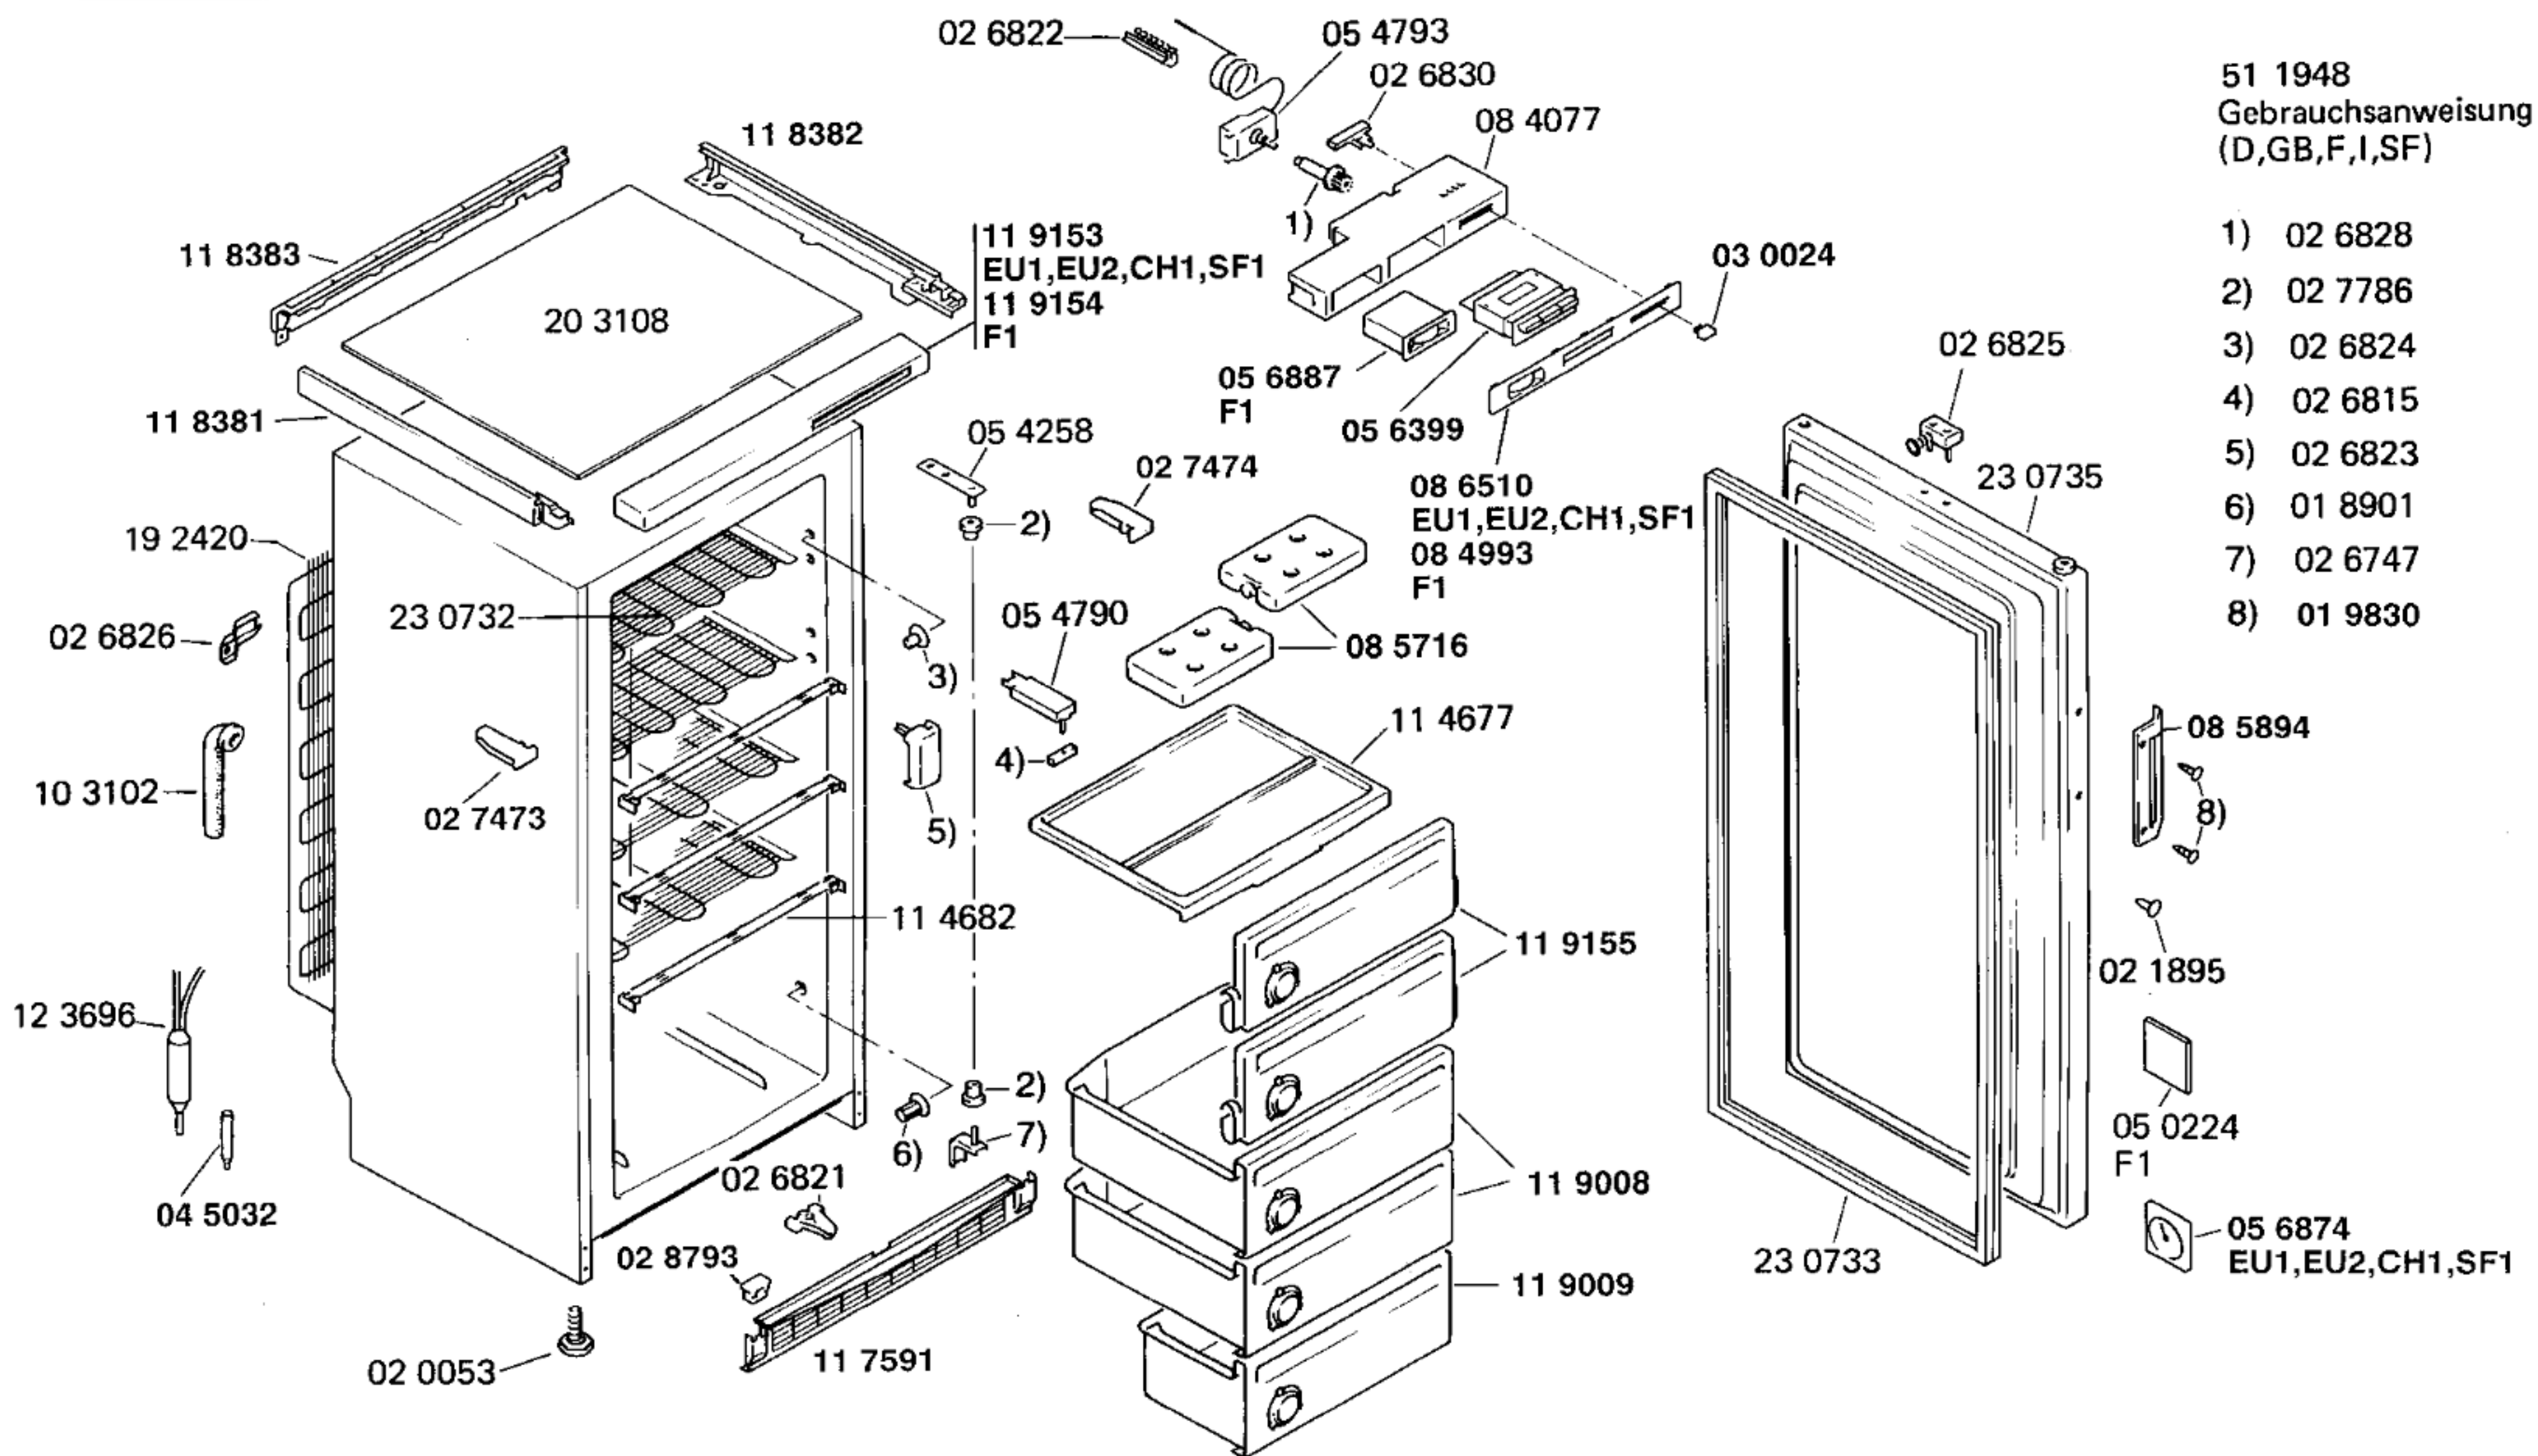

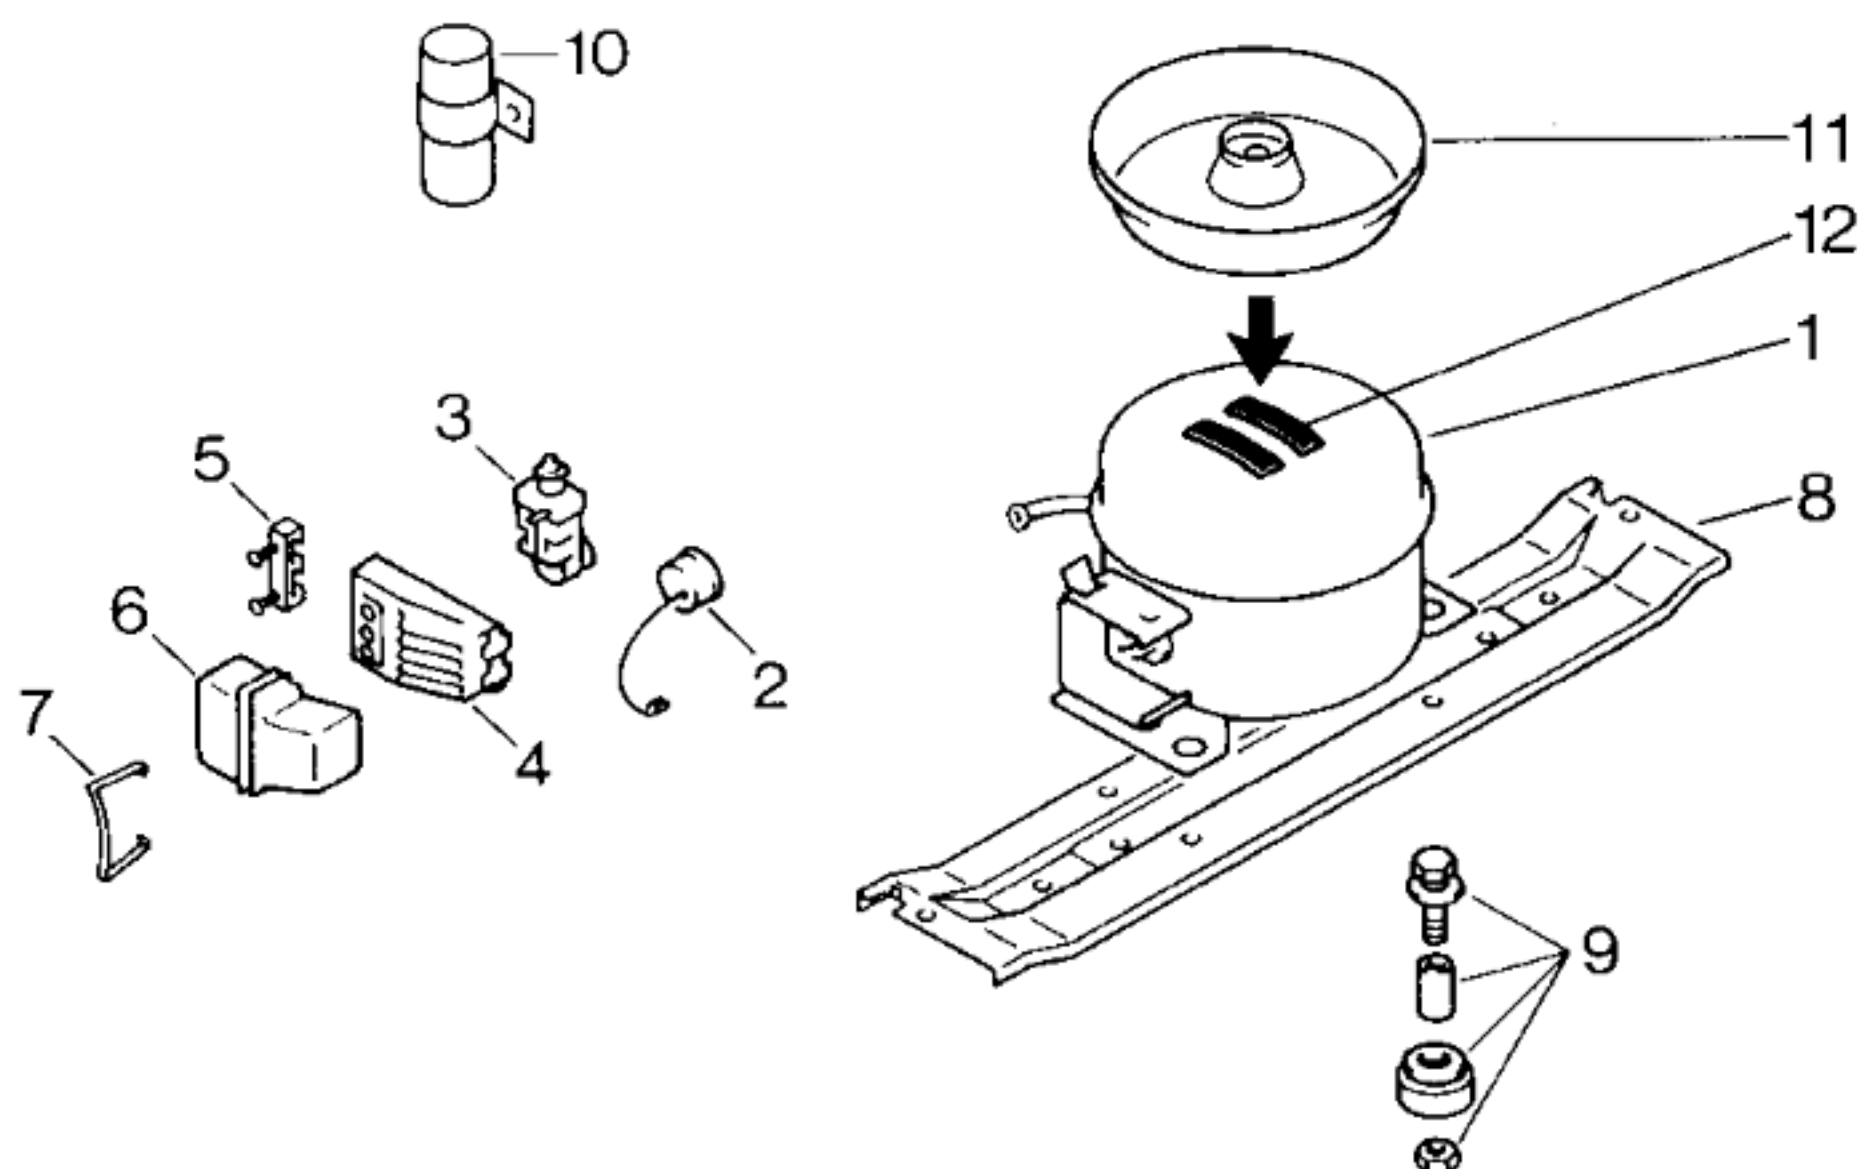

Pos.	EU1, CH1, F1,		
	EU2	SF1	
	Aspera	Matsushita	
	BY 1112 A	FN66 Q 11G	
1	14 0166	14 0362	
2	02 2337		
3	02 2342	02 7666	
4	05 1748		
5			
6	05 1746	05 4733	
7	02 2339	02 6731	
8	11 1567	11 1567	
9	05 0166	05 0166	
10			
11			
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Matsushita	
Typ/Type		BY 1112 A	FN 66 Q 11 G	
Förderleistung/Delivery/Débit		l/h	1060	1184
Anlaufstrom/Starting current/Cour. de démarrage		A	8,5	7,9
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	17,9	11,8
		Hi/aux Ω	43,7	40,1
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		077 B 2054		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		„ein“ $^{\circ}\text{C}$	-24	-16
Valeurs de commutation		„aus“	-34	-24
		(„abtauen“ od.) „alarm“	-19	-12
Füllmenge/Fill.quantity/Charge		R12 g	185	
Anschlußwert/Conn.load/Puiss. connectée		W	120	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		