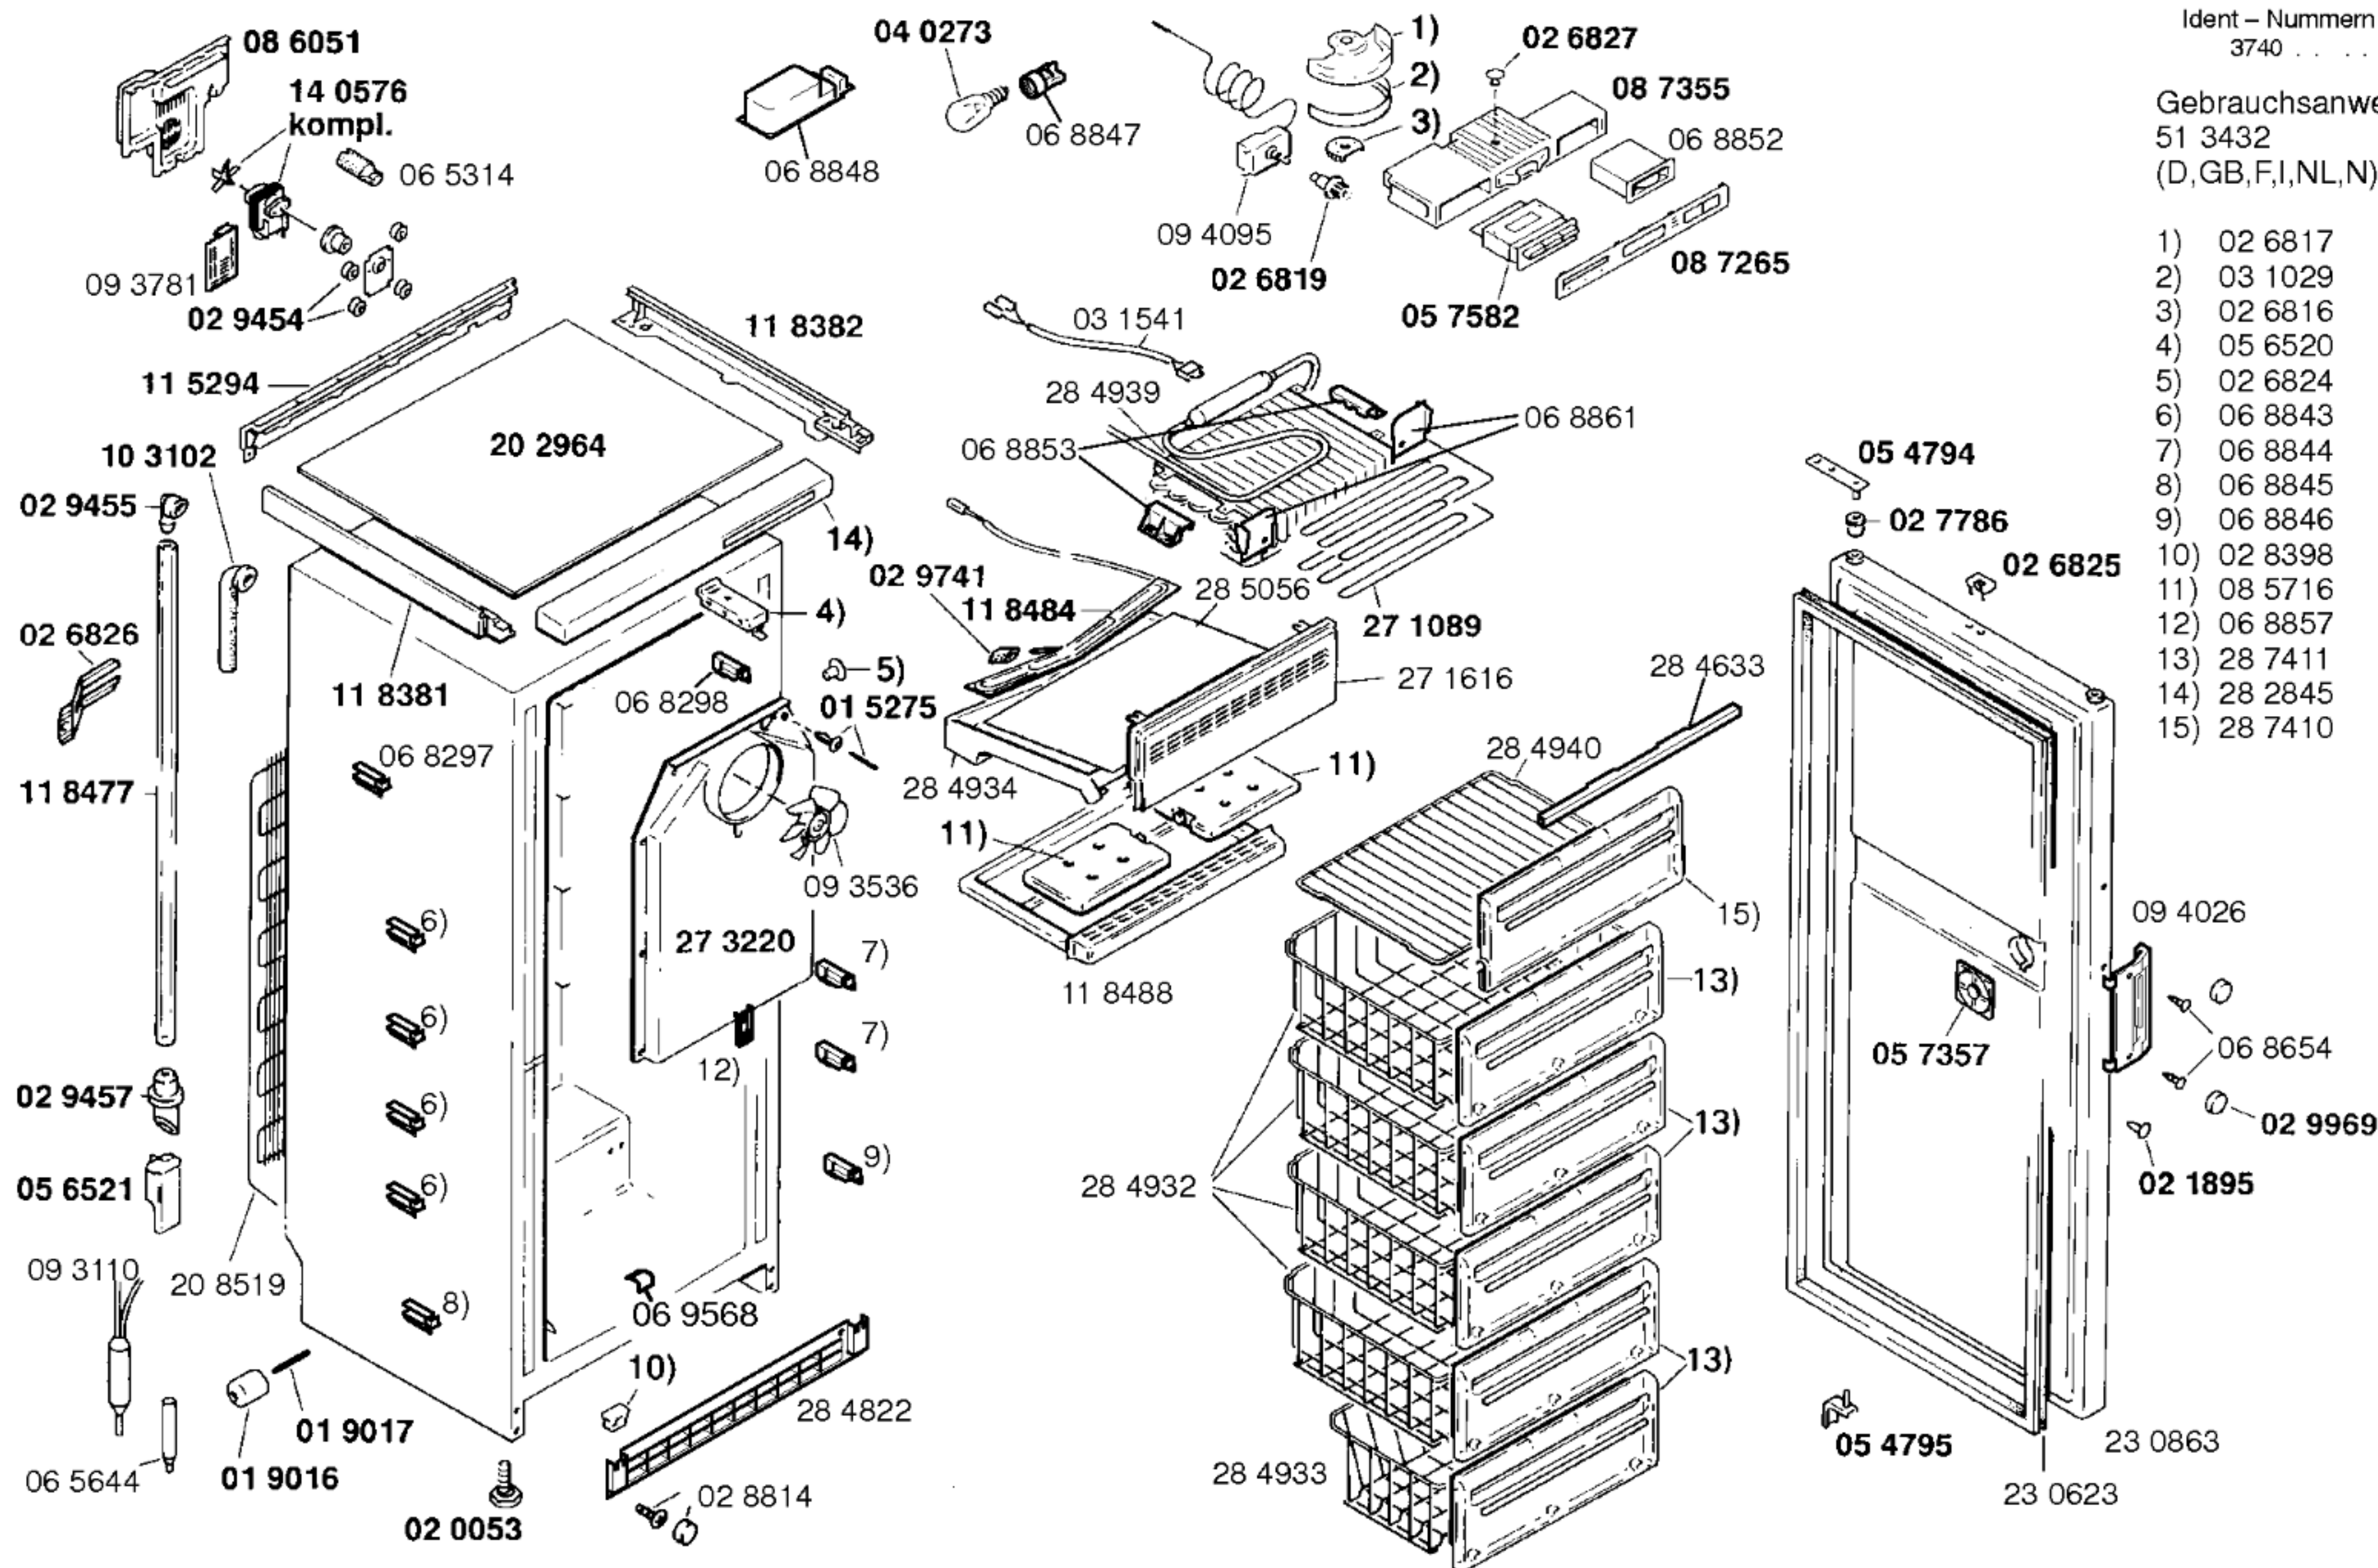


**BOSCH**

GSU5102/01-V01

GSU5102/02-V02

GSU5102/03-V03


KÜHL-, GEFRIERGERÄTE
Gefrierschränke, StandIdent - Nummern - Konstante
3740Gebrauchsanweisung
51 3432
(D, GB, F, I, NL, N)

**BOSCH**

GSU5102/01-V01
GSU5102/02-V02
GSU5102/03-V03

KÜHL-, GEFRIERGERÄTE
Gefrierschränke, Stand

Ident – Nummern – Konstante
3740

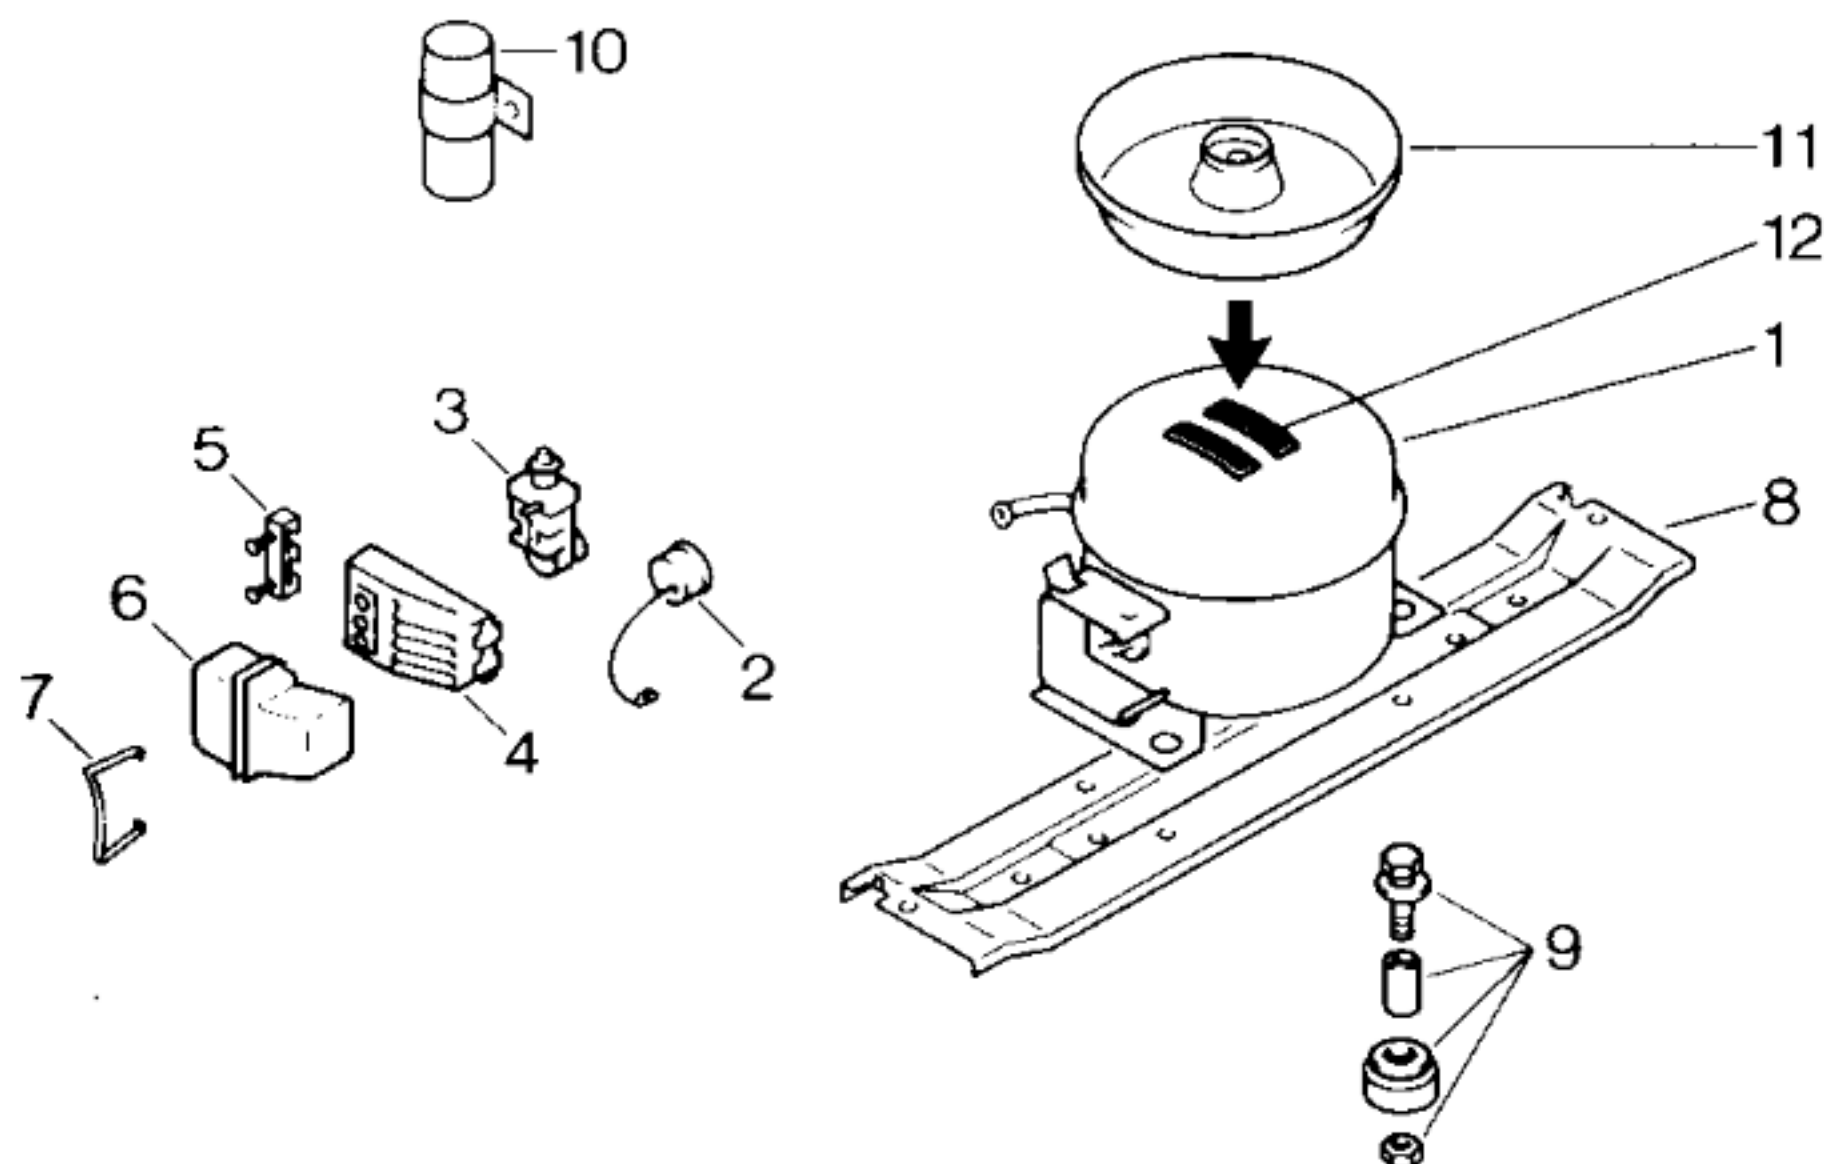

	V01, V02	V03	
Pos.	Matsushita	Danfoss	
	D77C15RAW	NLE 9 F	
1	14 1254	14 1554	
2			
3	03 2790	16 2109	
4	05 5516		
5		15 0760	
6	05 8458	15 1072	
7	02 6731		
8	11 9114	11 9114	
9	05 0166	05 0166	
10	05 9467	05 9467	
11	08 8535	28 1828	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita	Danfoss	
Typ/Type		D77C15RAW	NLE 9 F	
Förderleistung/Delivery/Débit		l/h	1384	1503
Anlaufstrom/Starting current/Cour de démarrage		A	9,2	10,5
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	11,0
		Hi/aux	Ω	26,7
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		2156		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“	°C	-26,9 -20
Valeurs de commutation		„aus“		-33,5 -25
		(„abtauen“ od.)	„alarm“	-22,5 -14
Füllmenge/Fill.quantity/Charge		R134a	g	220
Anschlußwert/Conn.load/Puiss. connectée		W	150	158
Heizung/Heater/Chauffage		Abtauheizung	Rinnenheizung	
Widerstand/Resistance/Résistance		Ω	173	6050
Leistung/Power/Puissance		W	333	9,5
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	340	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		