

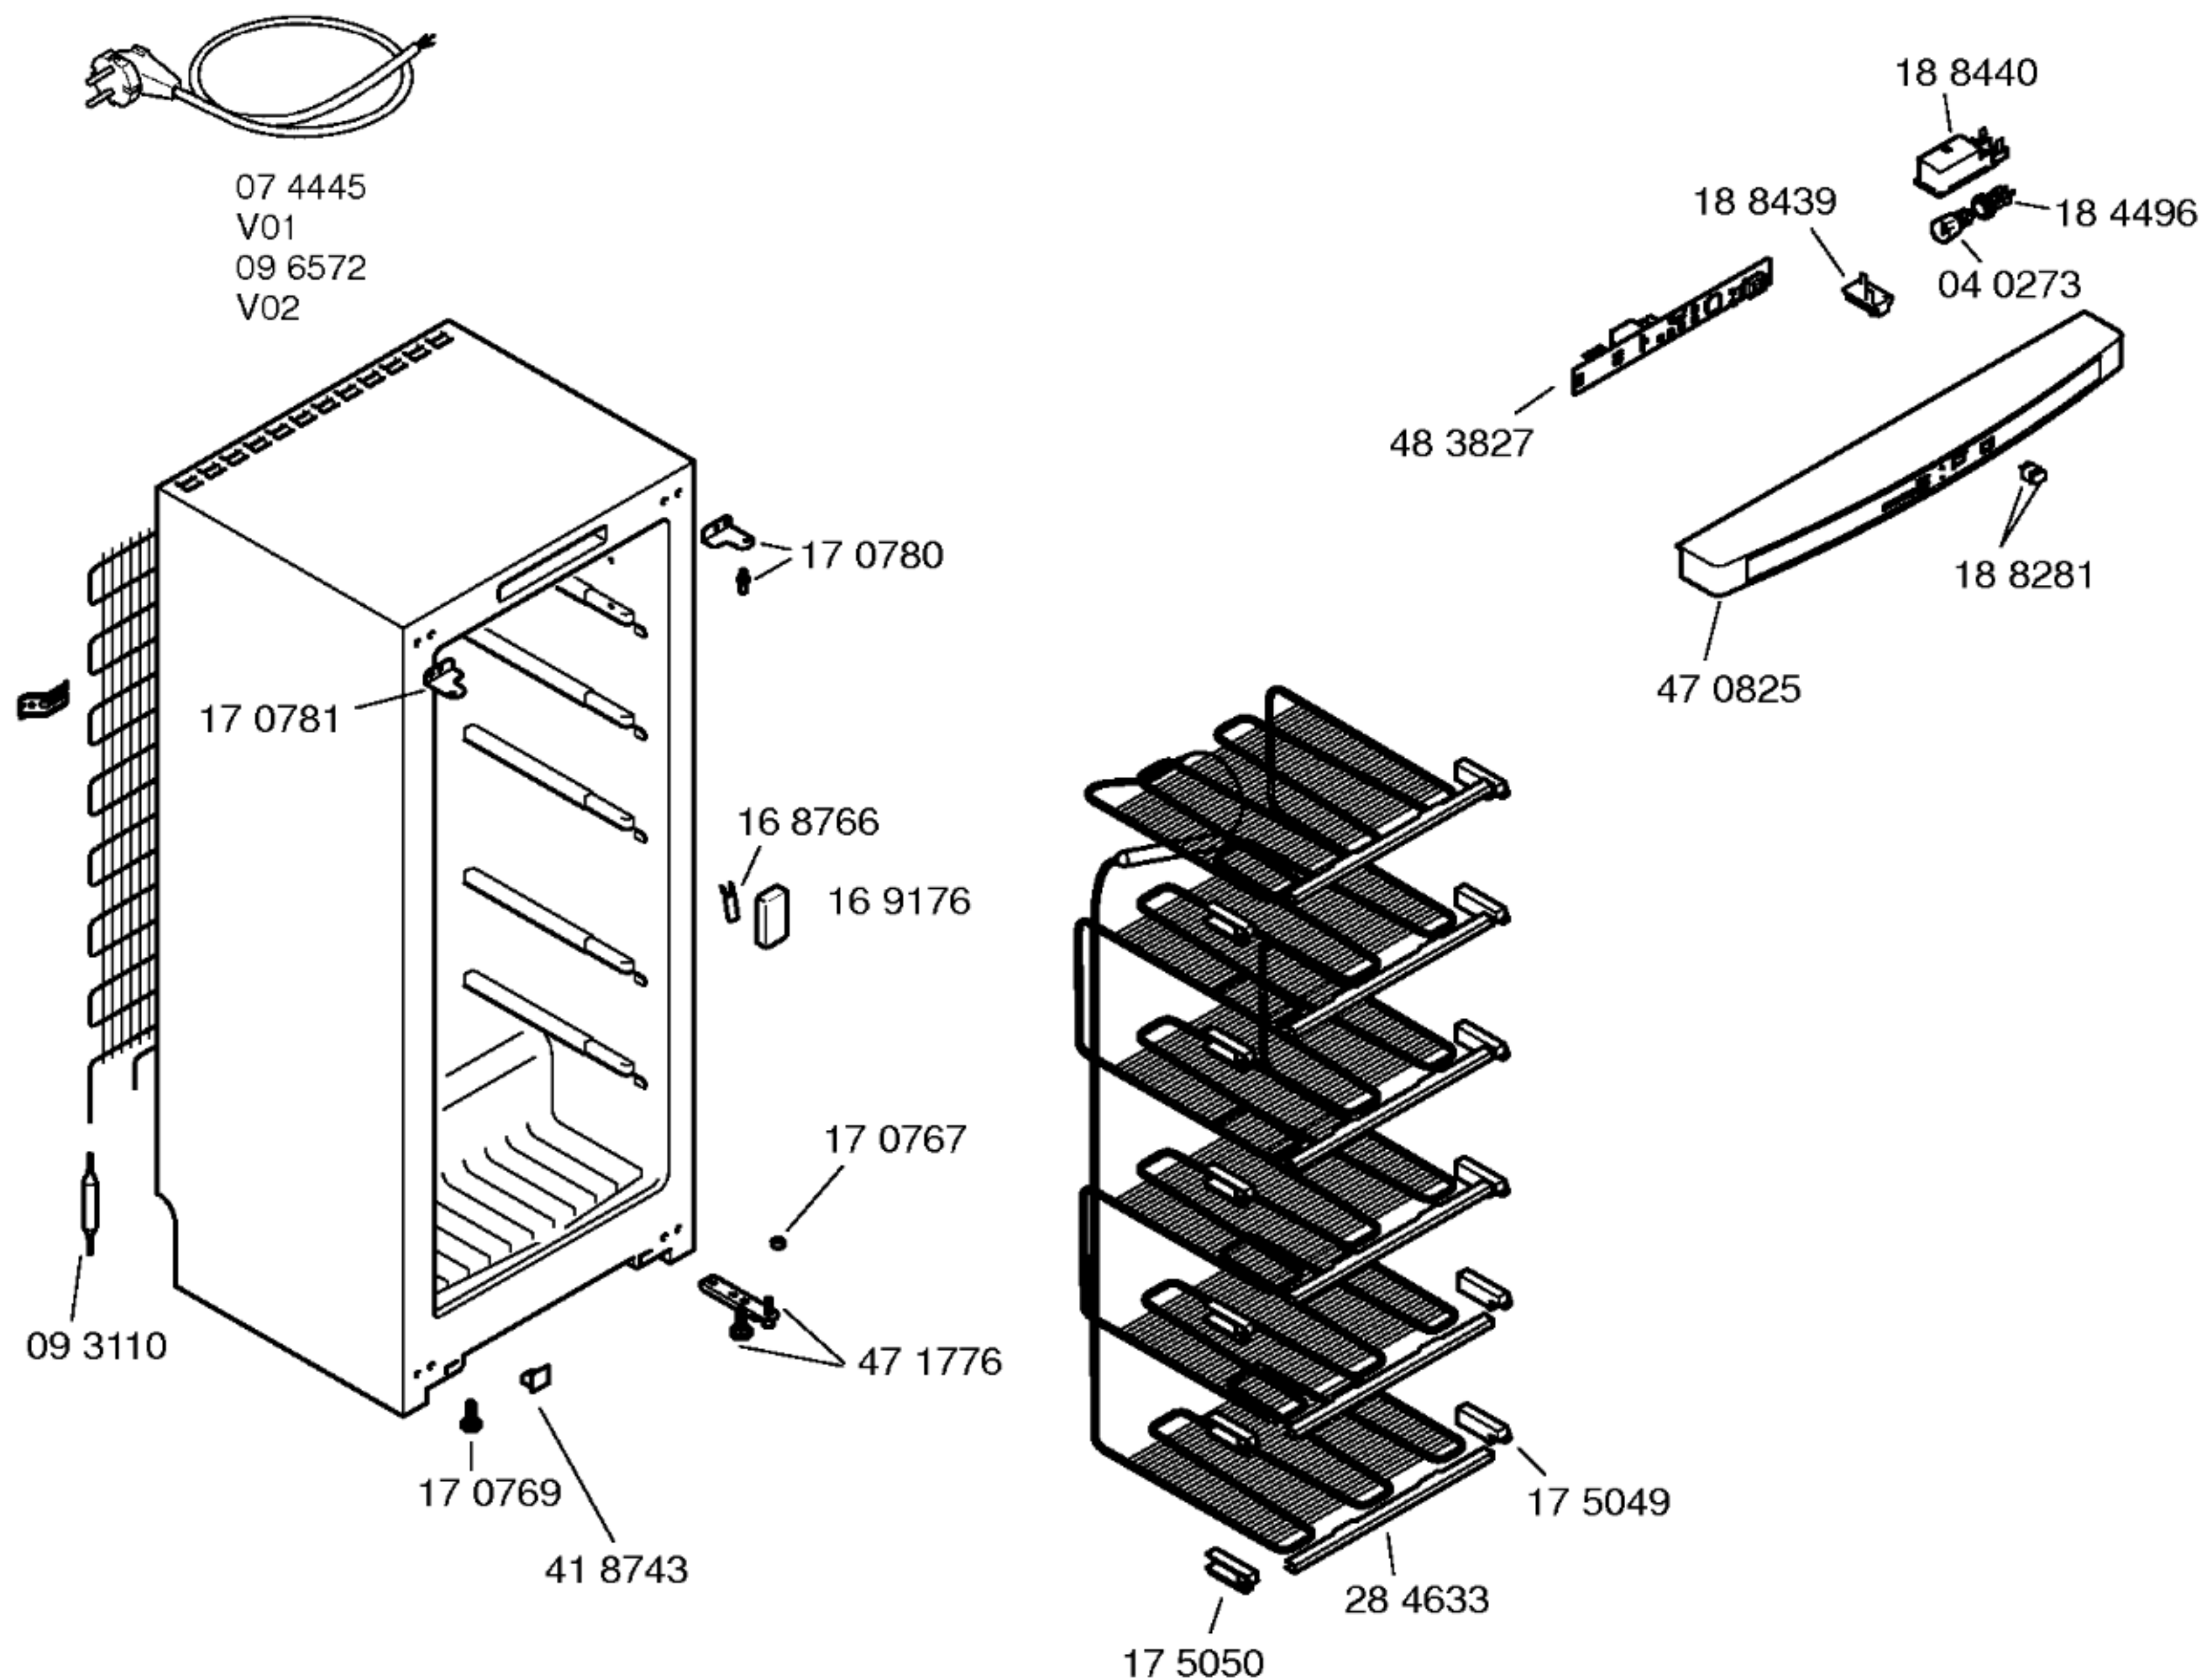
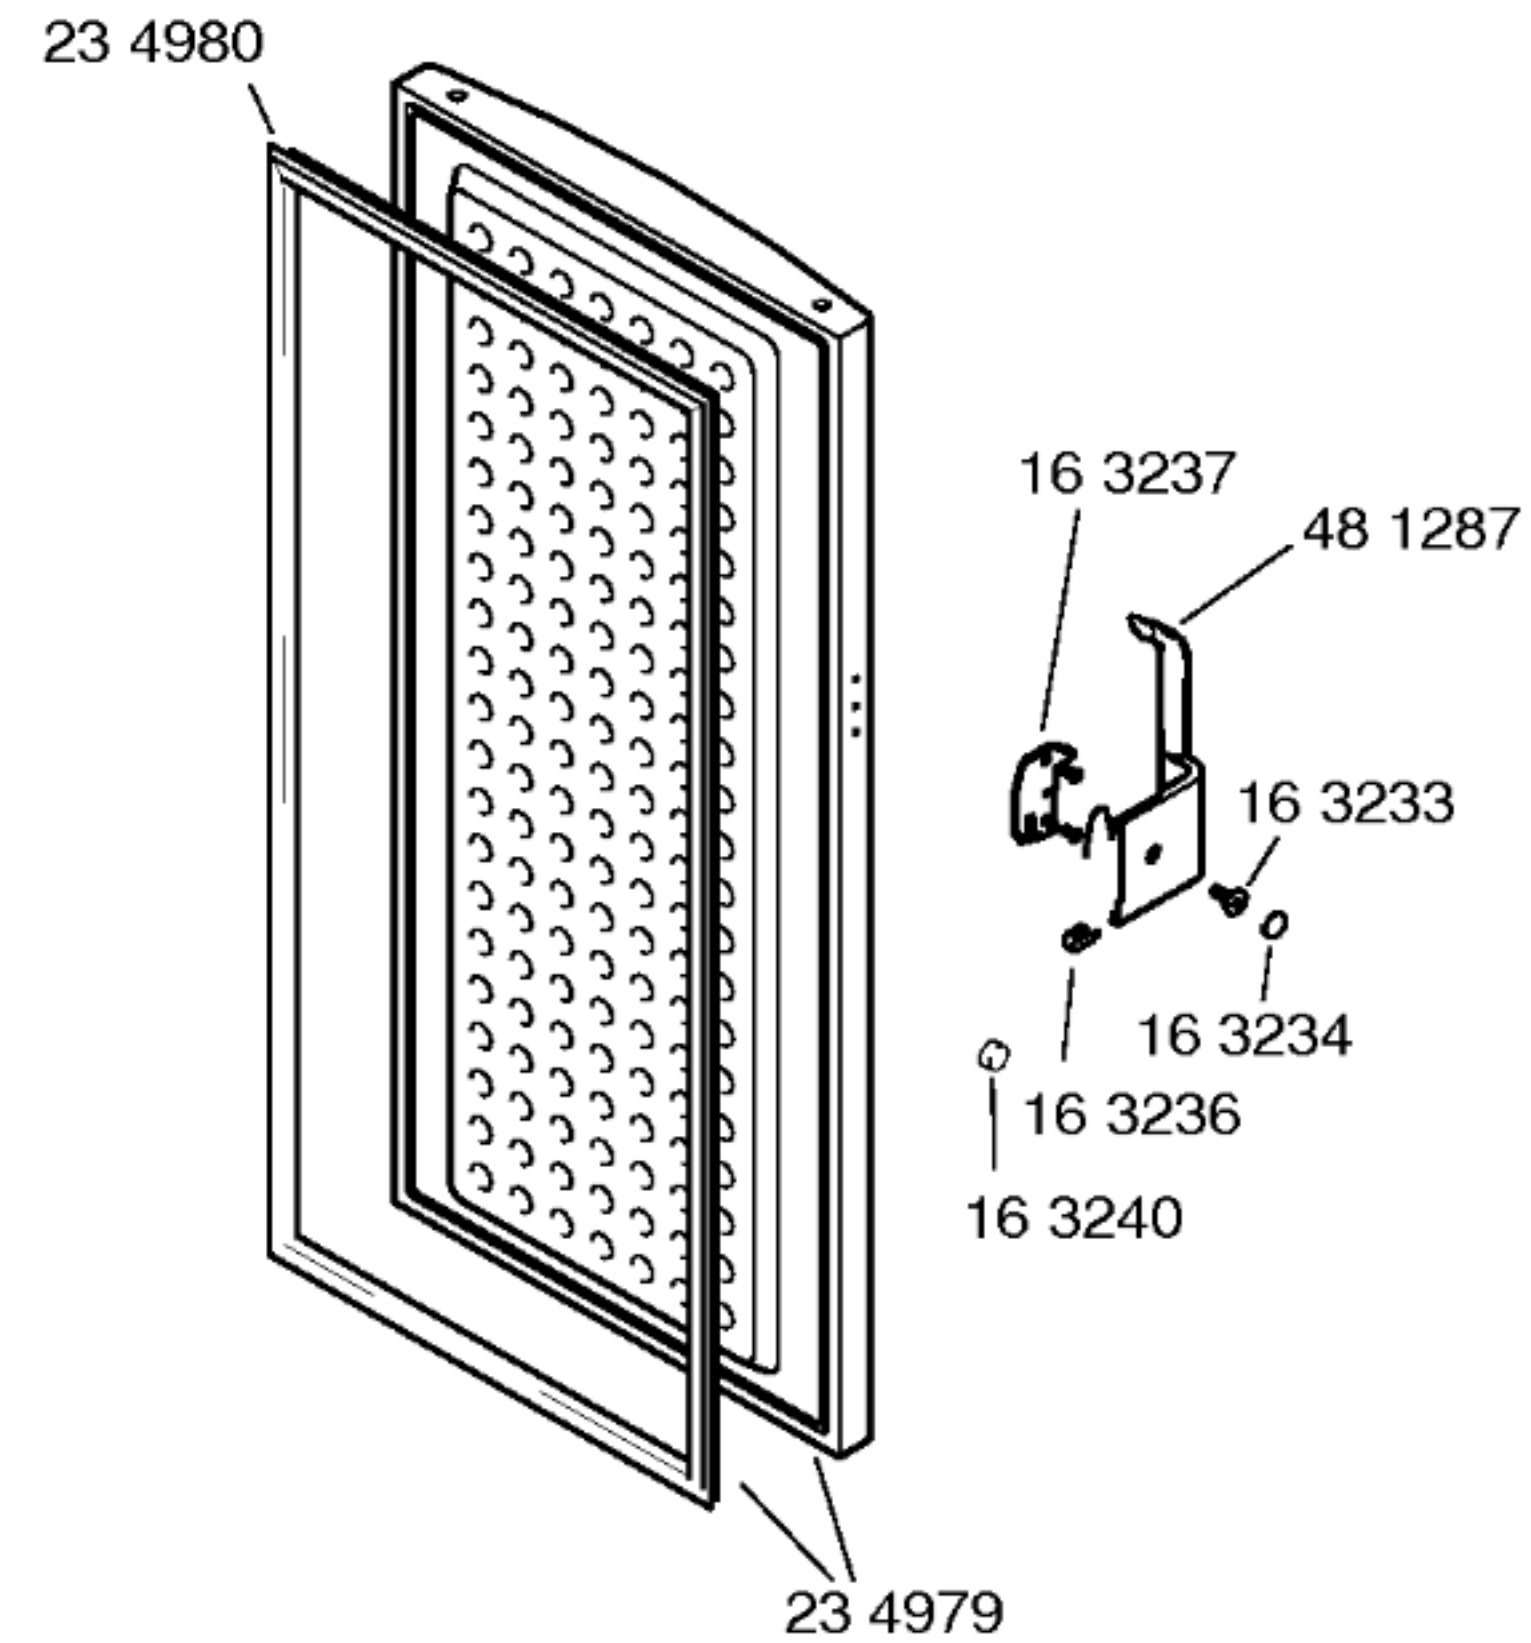


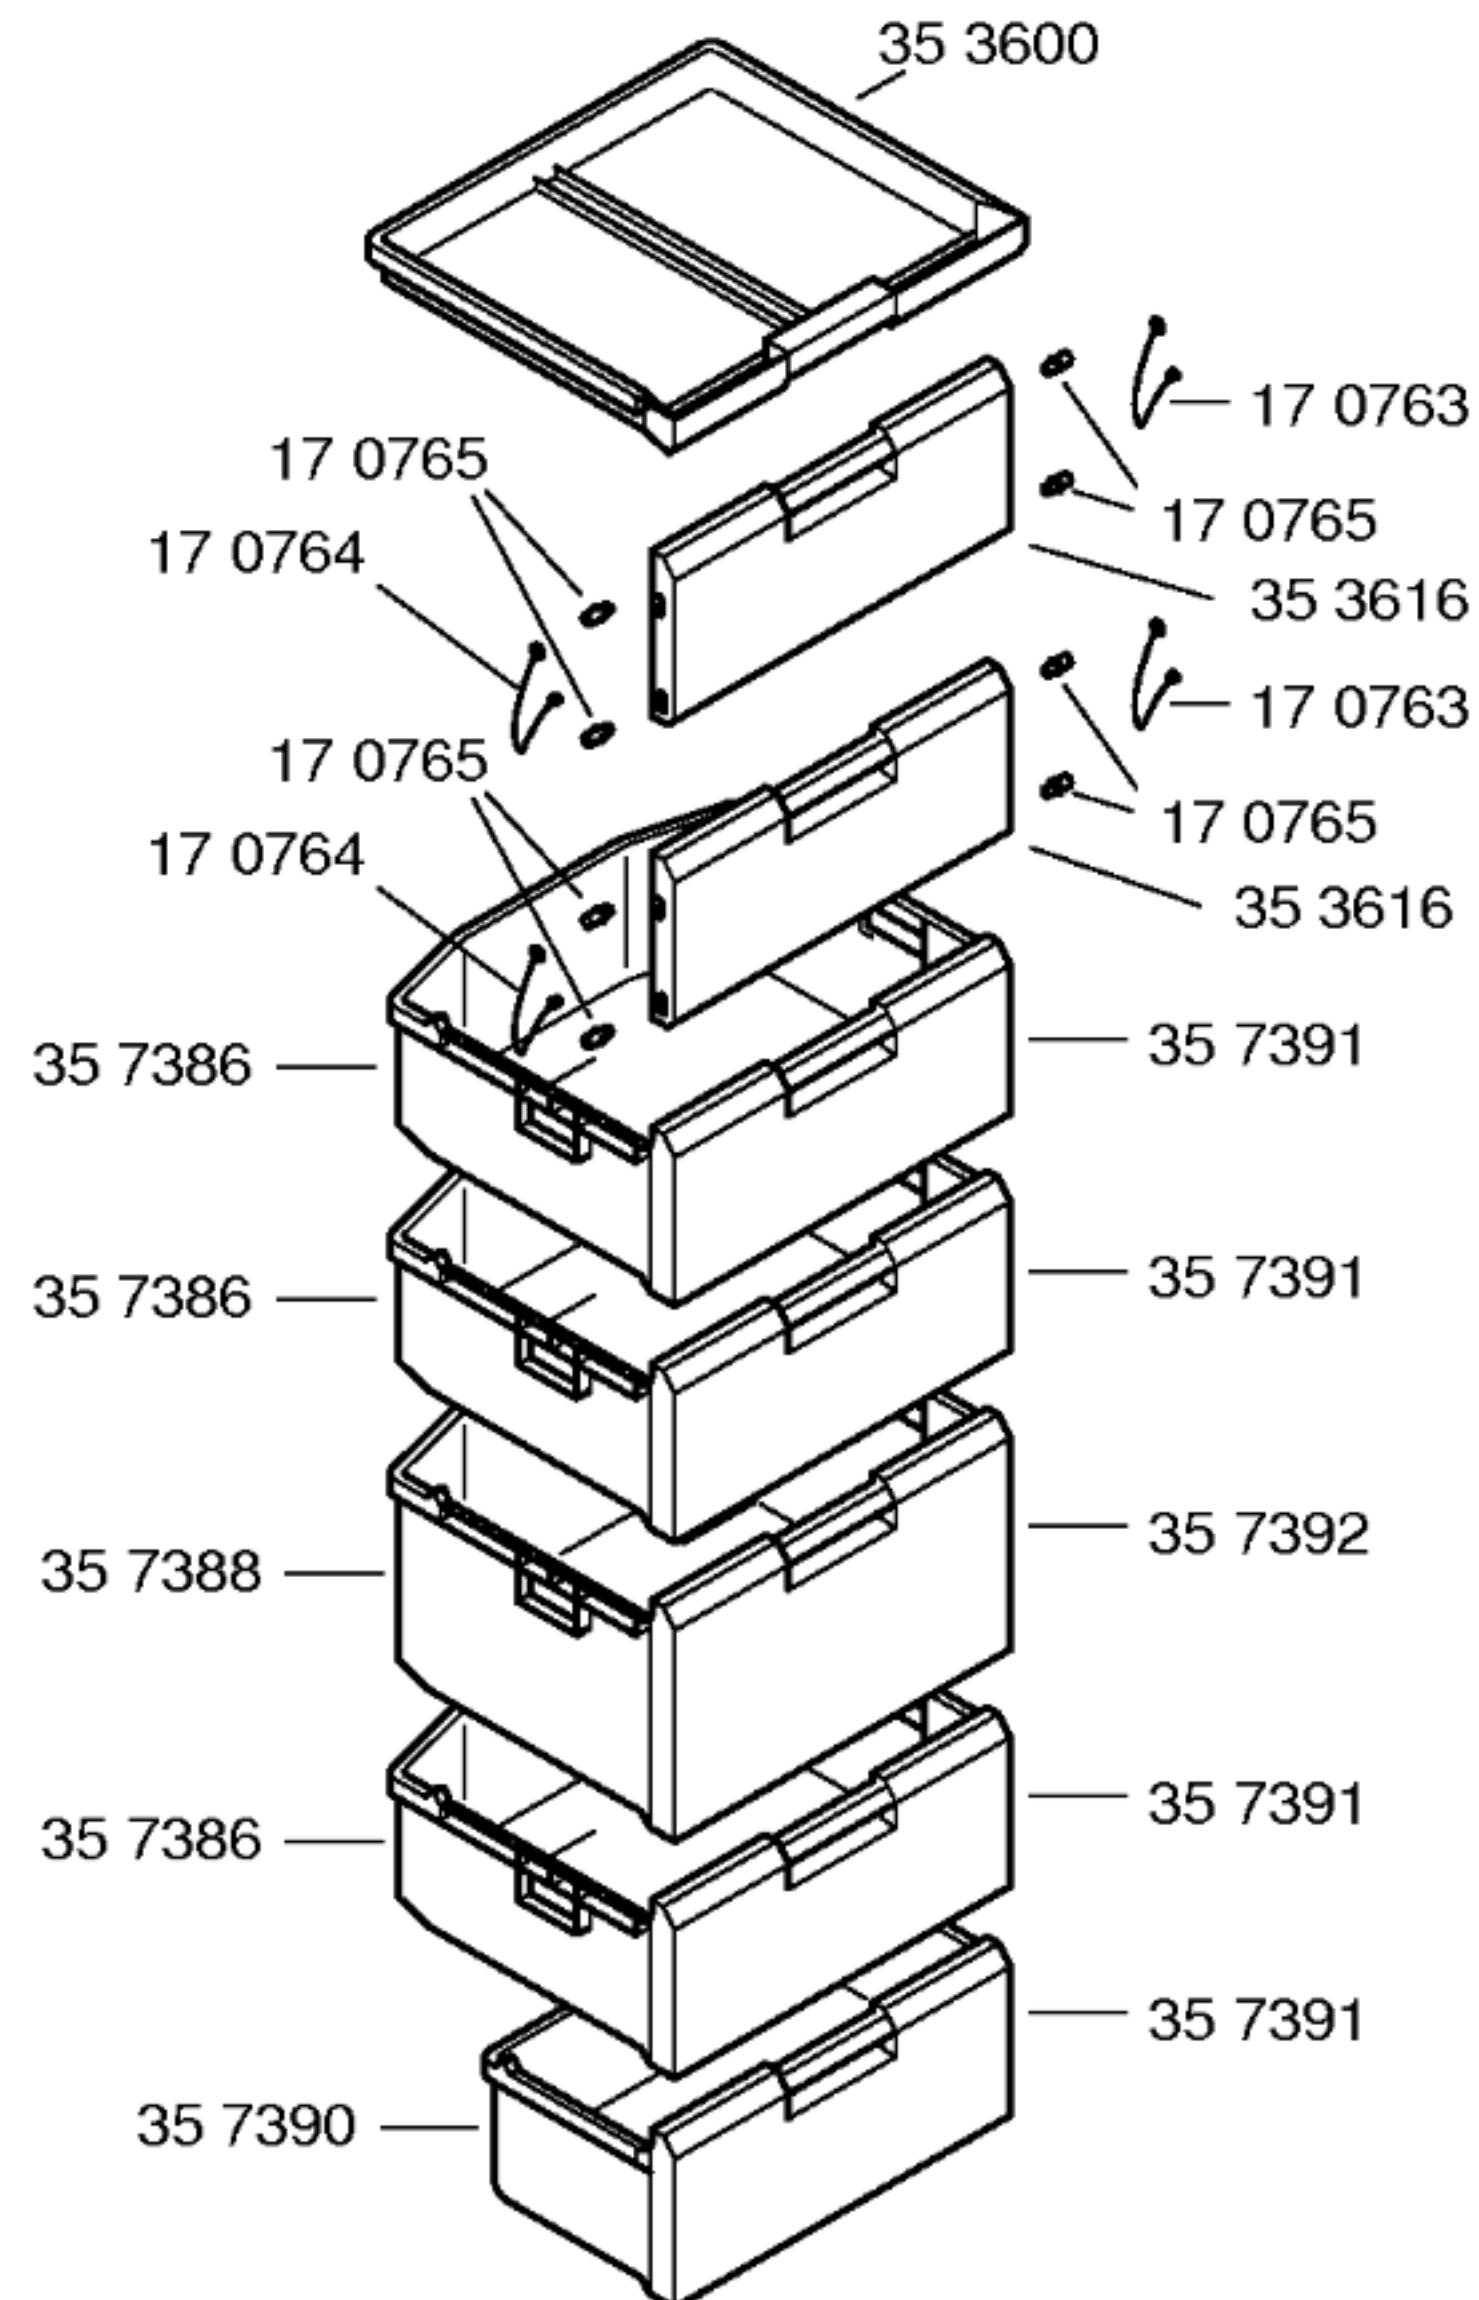


Gebrauchsanweisung
58 6541
(DE,EN,FR,IT,NL,ES
PT)
Montageanleitung
58 0241
(D,GB,F,I,NL,DK,N,SF,
SE,TR)

Beistellsatz
26 5629

Side by Side
Beistellsatz zu KSR/KSK
48 1044

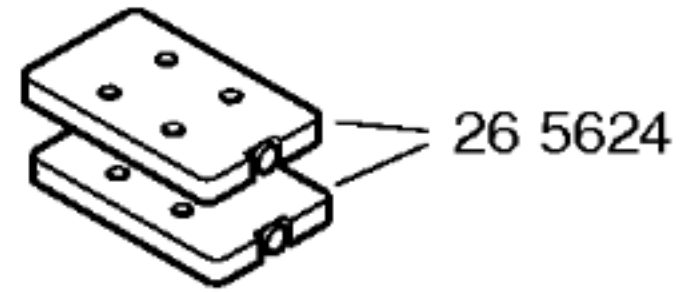

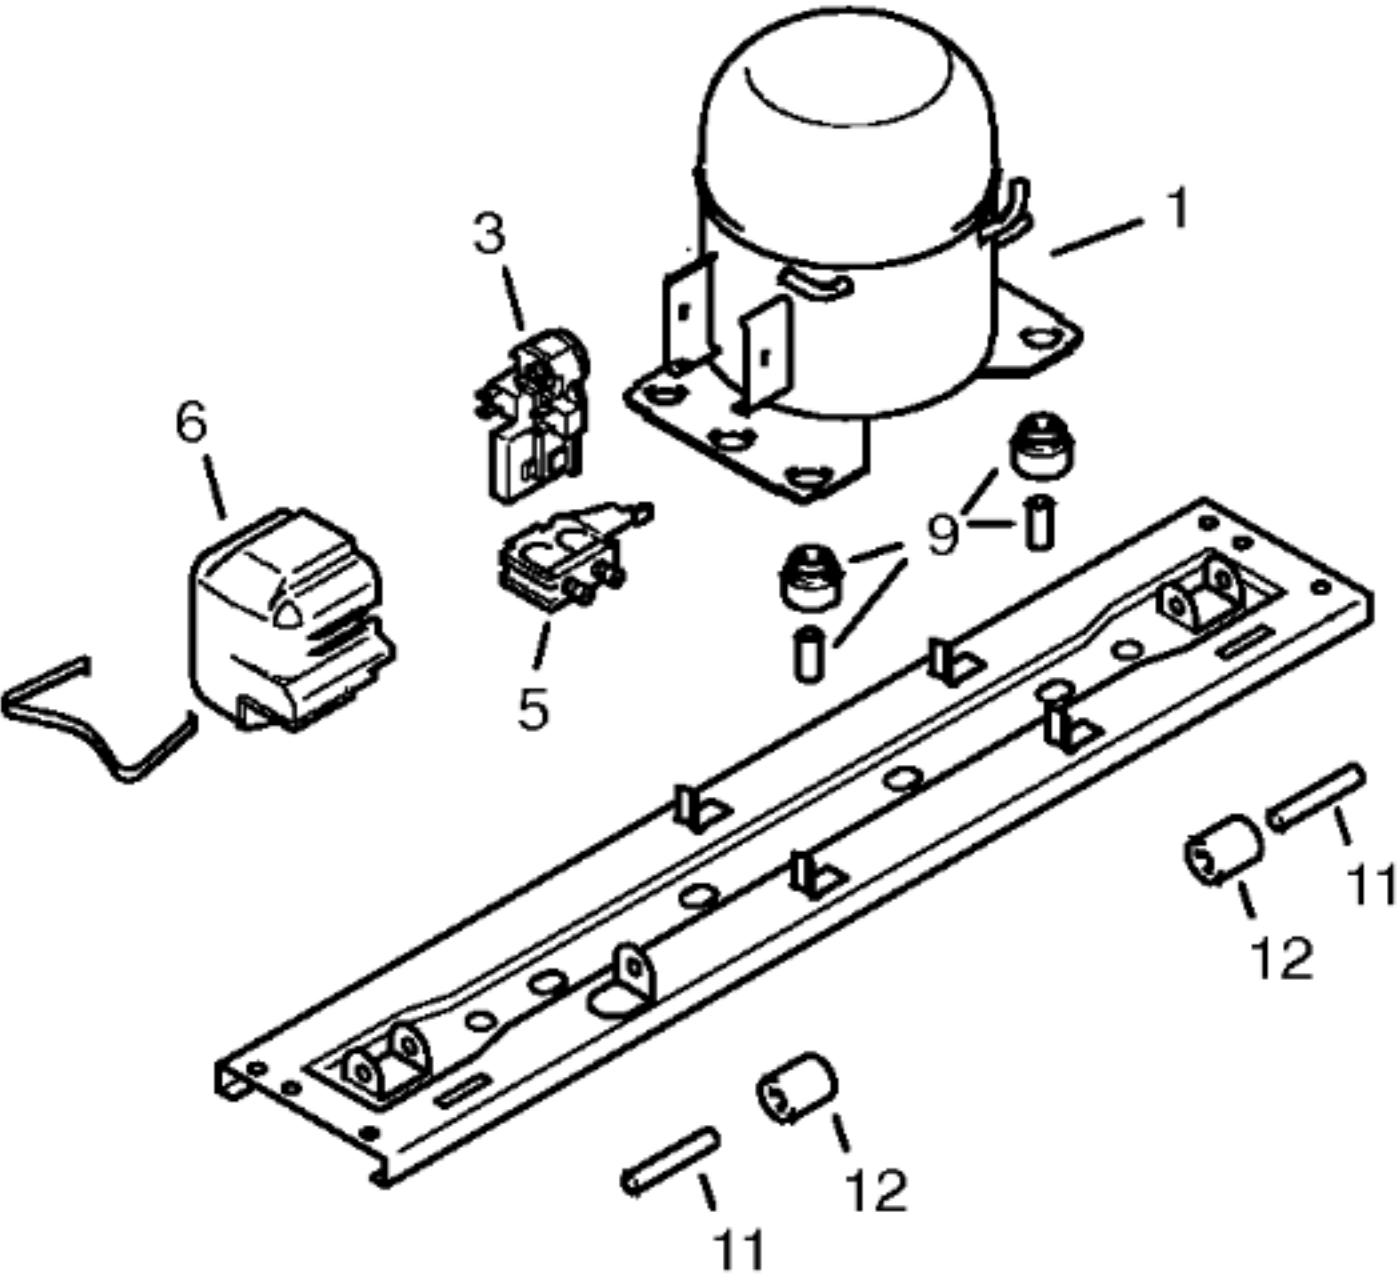

Pos.	Matsushita		
	DG 110E		
1	14 2190		
2			
3	18 4235		
4			
5	16 2549		
6	16 6782		
7			
8	21 4604		
9	05 0166		
10			
11	01 9017		
12	01 1916		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		DG 110E		
Förderleistung/Delivery/Débit		l/h	1955	
Anlaufstrom/Starting current/Cour de démarrage		A	8,6	
Widerstand/Resistance/Résistance		Ha/main/prin	Ω	11,78
		Hi/aux	Ω	14,58
Temp.–Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values		"warm"		
Valeurs de commutation		"kalt"		
		"alarm"		
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	119	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
NTC–Fühler / Sensor		°C	kΩ	°C
		+10	9,95 ±0,18	–18 43,31 ±1,10
		+5	12,70 ±0,18	–22 54,66 ±1,59
		0	16,33 ±0,16	–26 69,42 ±2,29
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		