



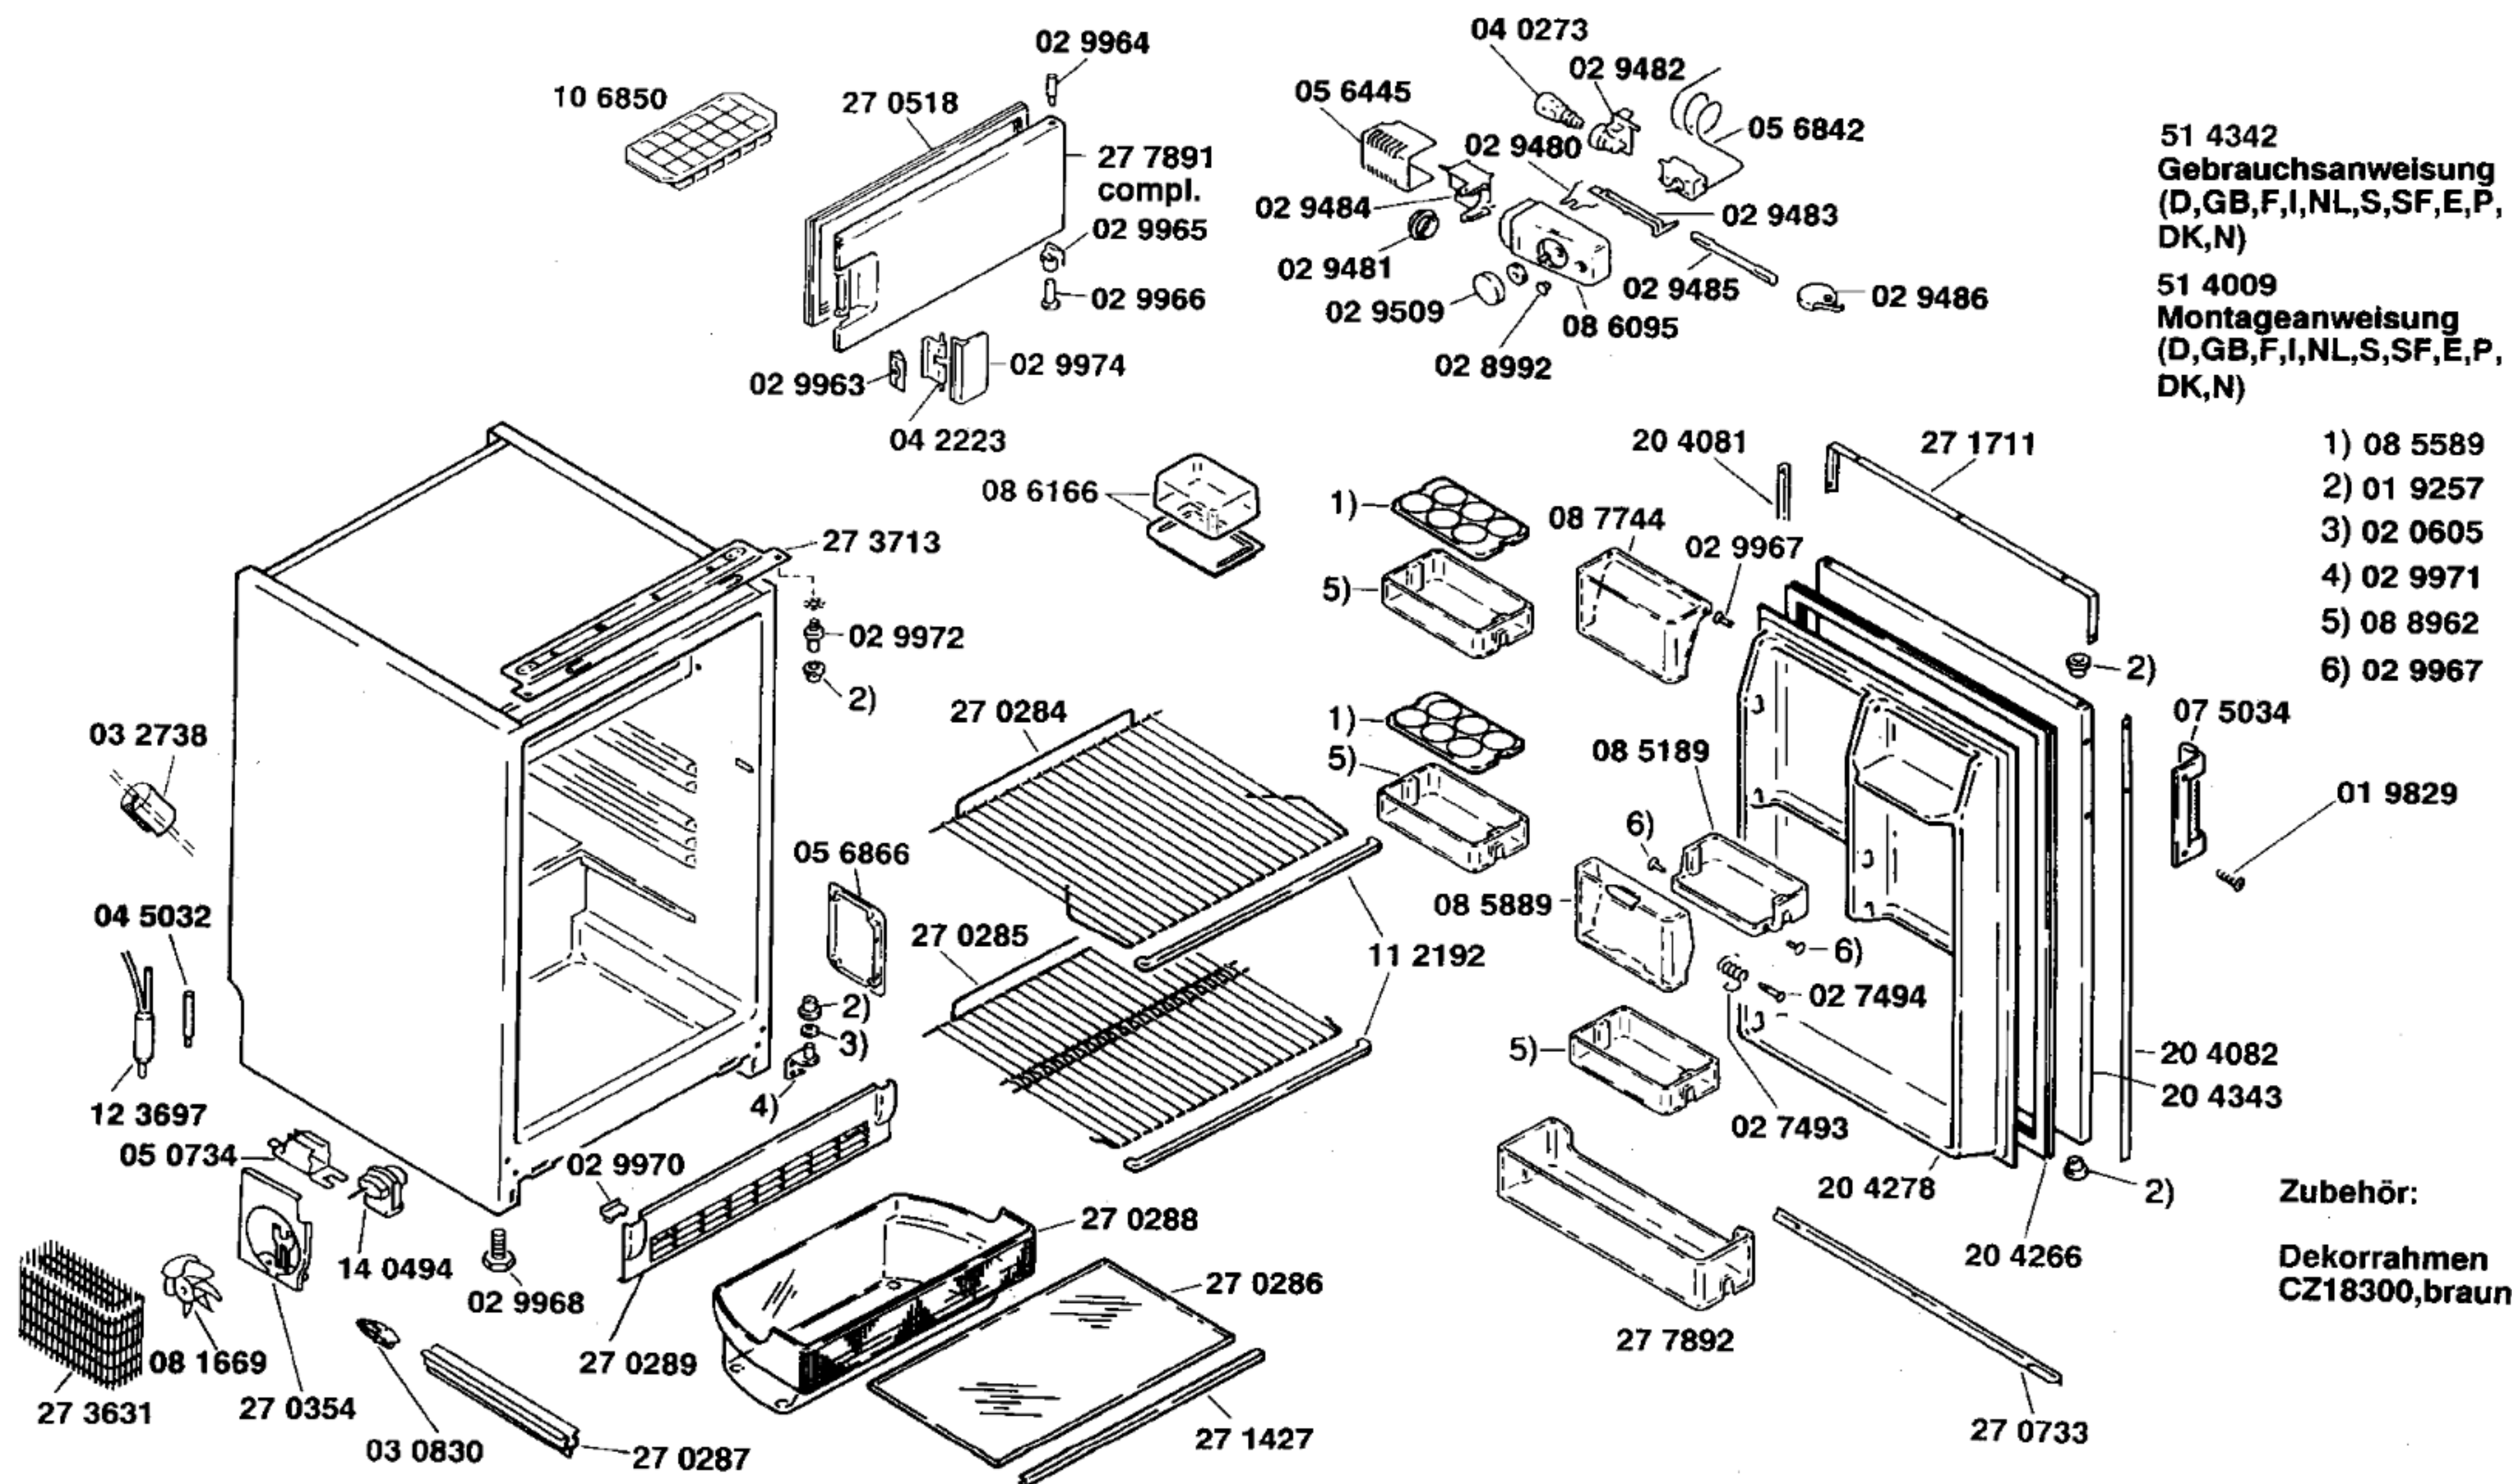

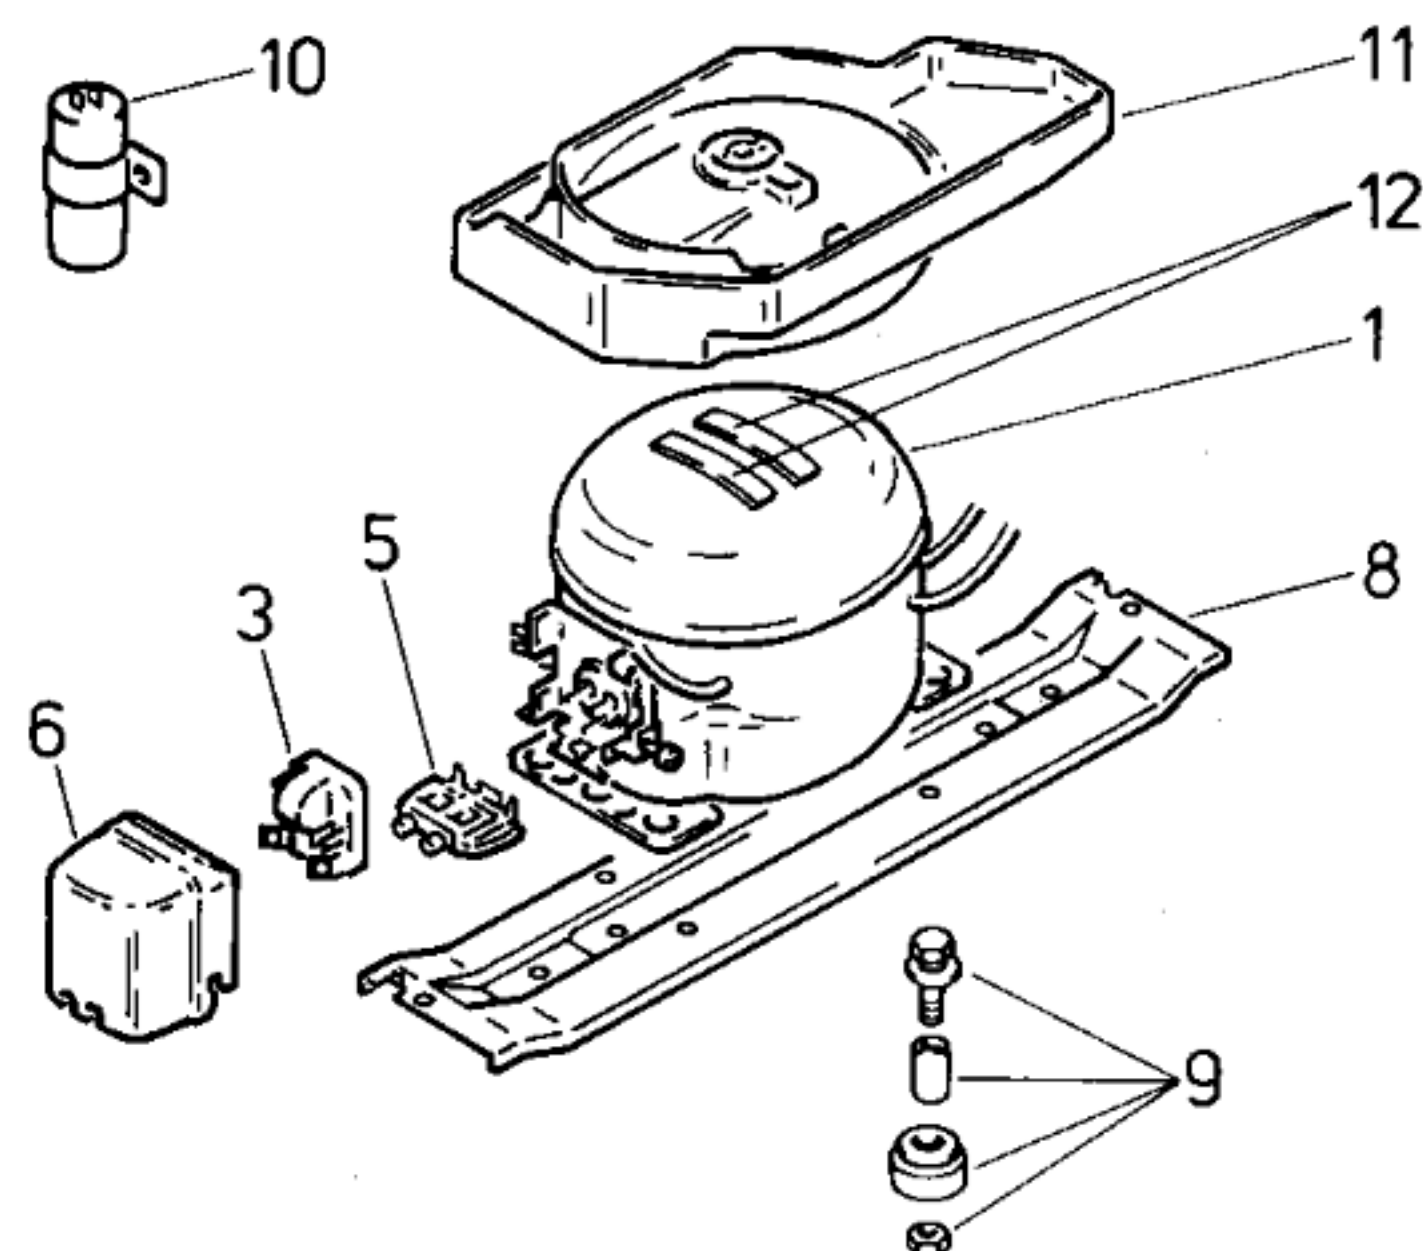

Pos.	EU1		
	Danfoss	Matsushita	
	TL 4A	S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss	Matsushita	
Typ/Type		TL 4 A	S075LKAA	
Förderleistung/Delivery/Débit		l/h	695	641
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	5,7
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	23,4	24,4
		Hi/aux Ω	15,5	39,8
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		+ 4,5 + 4,5		
Valeurs de commutation		- 31,0 - 13,5		
		„ein“ „aus“ „alarm“		
Füllmenge/Fill.quantity/Charge		R12 g	130	
Anschlußwert/Conn.load/Puiss. connectée		W	110	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Resistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		