



Gebrauchsanweisung
52 3269
(DE,GB,FR,NL,IT,ES,
PT,GR)

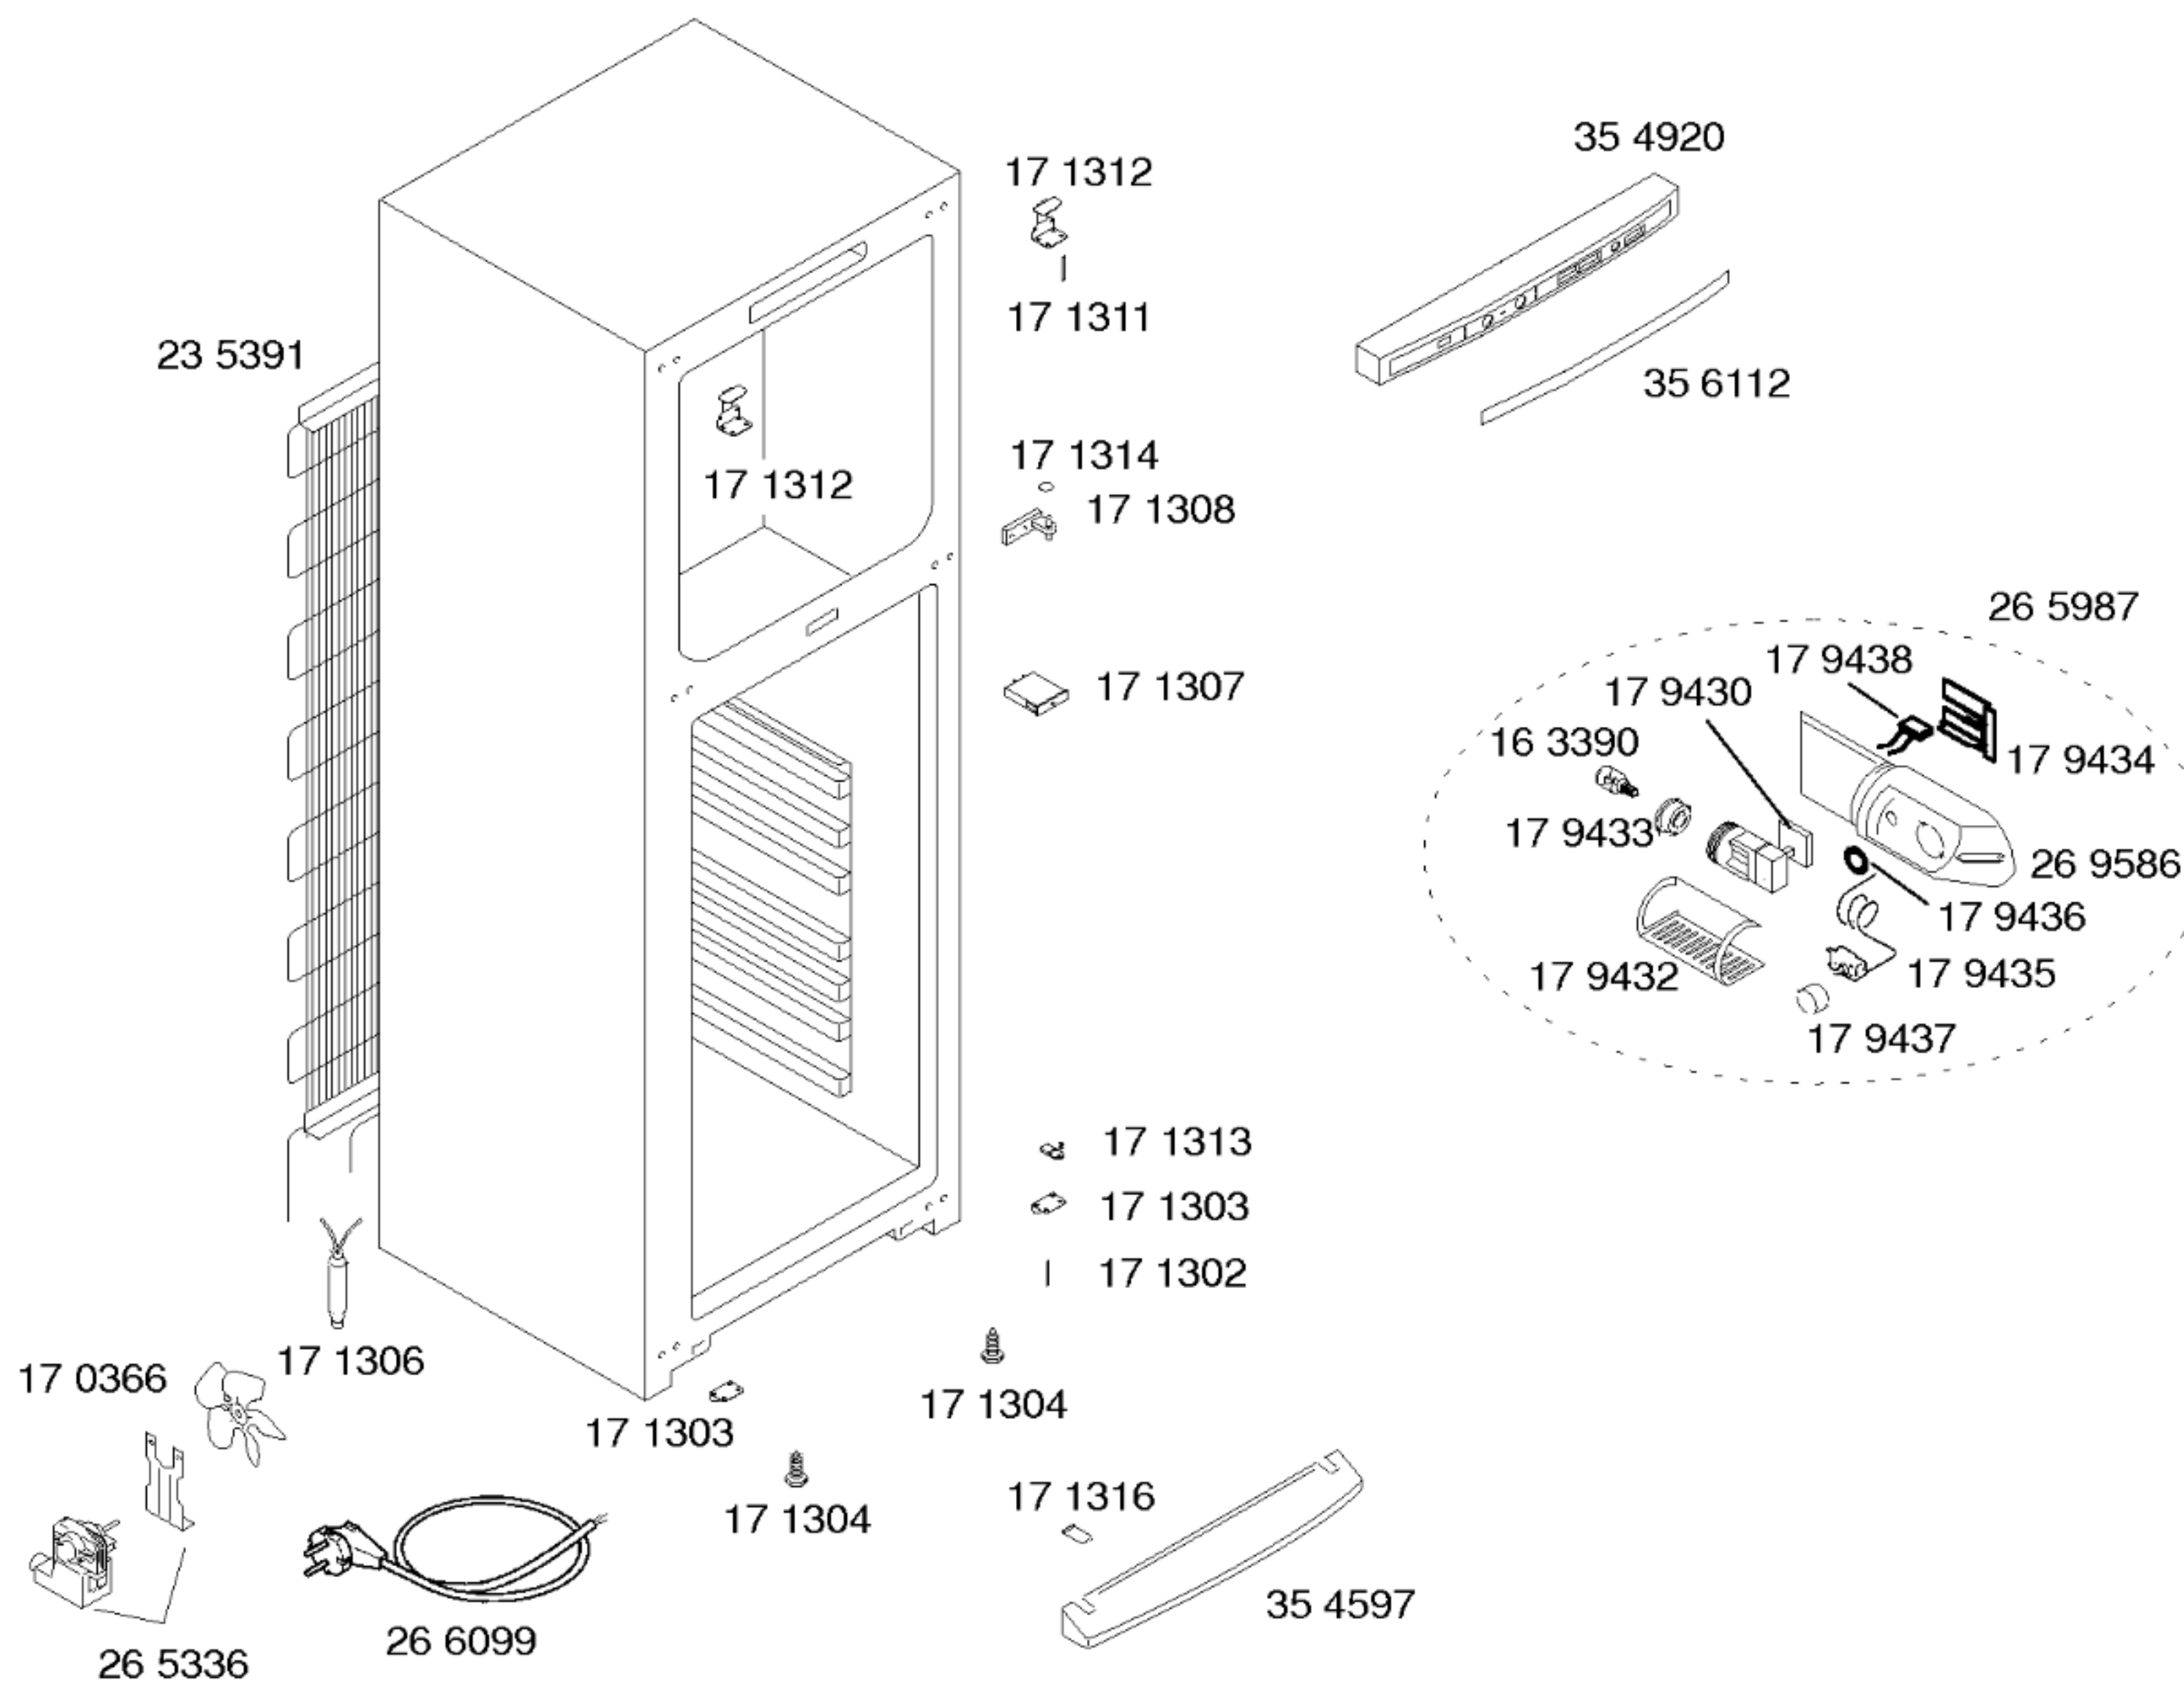


35 4598

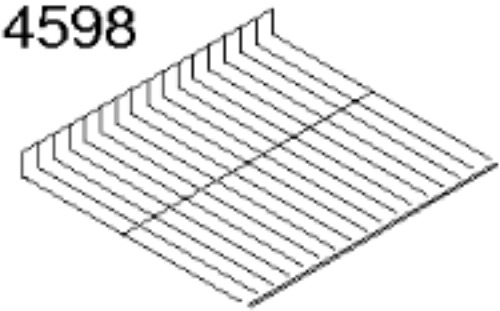

26 2266




16 3401

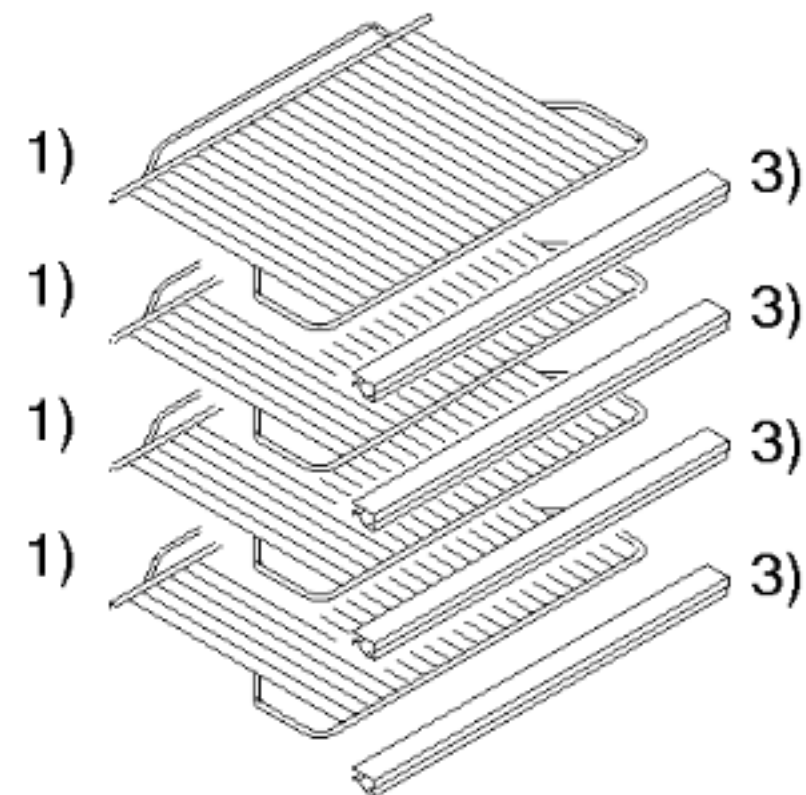


35 4783

35 4784


35 4785

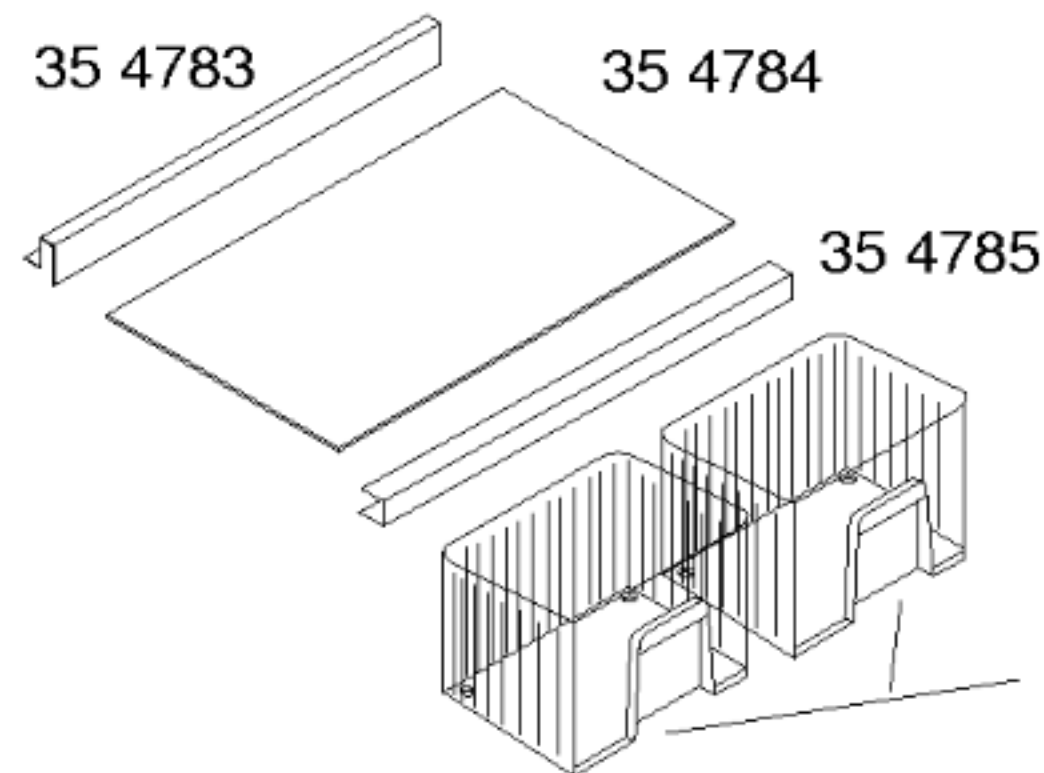

35 4895

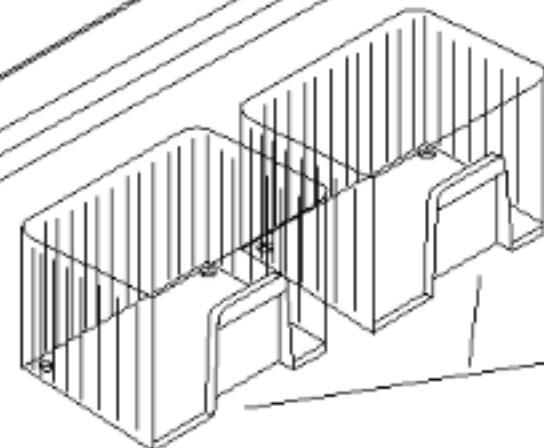


35 6114




26 7116

26 7117



26 6411

26 7119



26 6490


26 6486

26 6490


26 6485

26 6488


26 7118

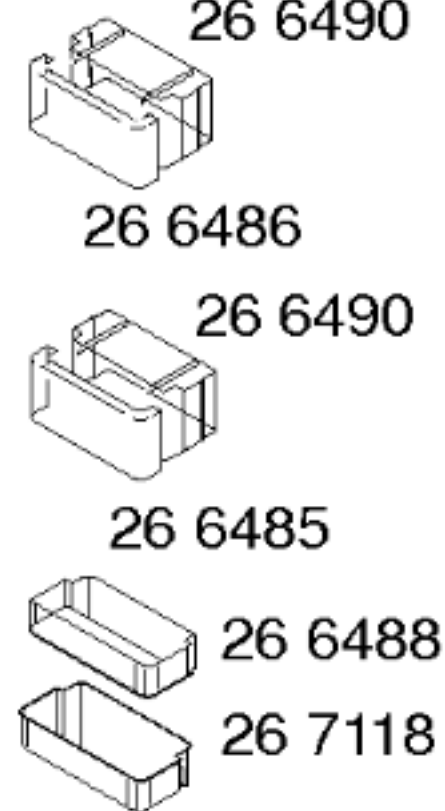


35 6114



35 6113



21 4897

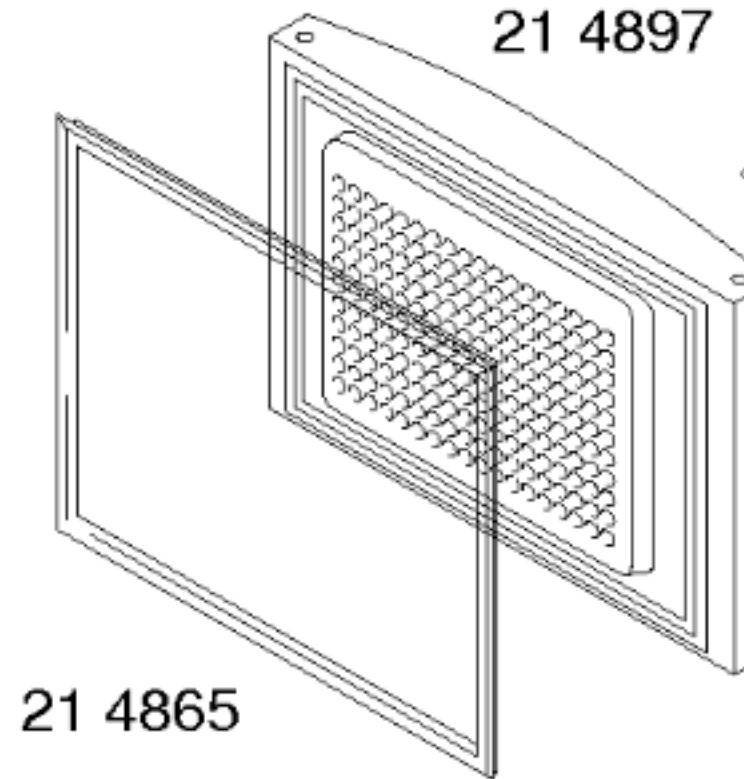


2)

26 6075



23 5390

17 1319

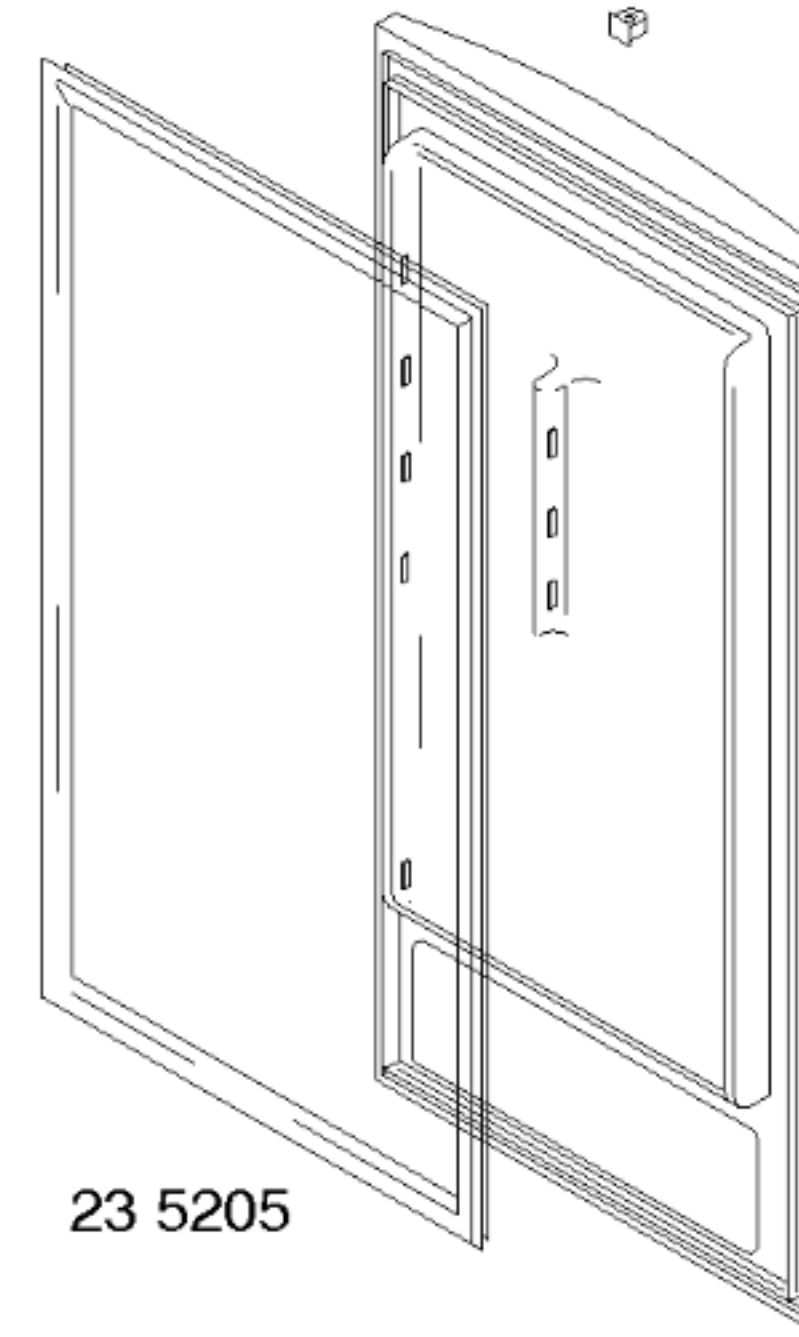


2)

26 6076



- 1) 35 4780
- 2) 17 1321
- 3) 35 4789

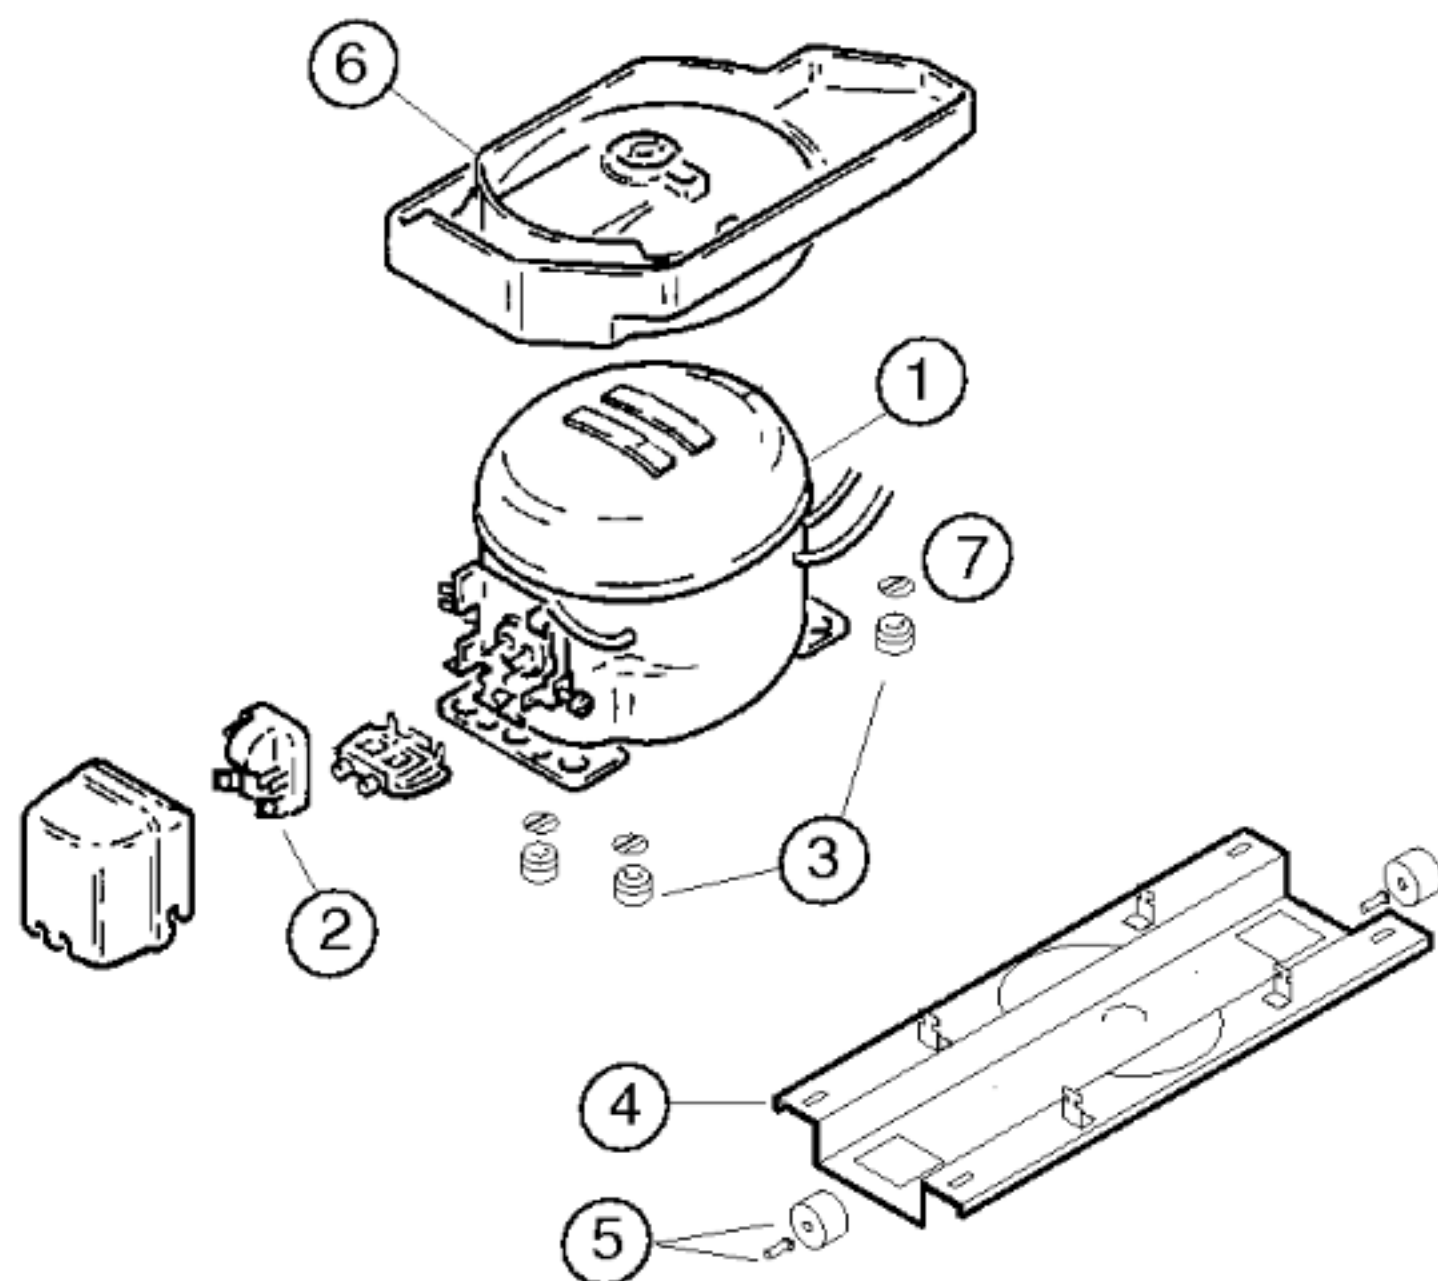

Pos.	Danfoss		
	NLE15K		
1	14 1926		
2	16 5570		
3	16 3427		
4	35 4583		
5	17 1318		
6	26 5327		
7	17 1519		
8			
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.	A Ω	Danfoss NLE15K 10.9 10.7 13.0	
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Acma kapama degerleri Valeurs de commutation/Termostat degeri (..abtaven' od)	..ein/acma °C ..aus"/kapama ..alarm'	RANCO K59/P1777 +3.5 +3.5 -31 -20	
Füllmenge/Fill. quantily/ Dolum miktarı	R600 g	*	
Anschlusswert/Comm. load/Giris gucu	W	*	
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc	Ω W		
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans	Ω		
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim	Ω V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız