


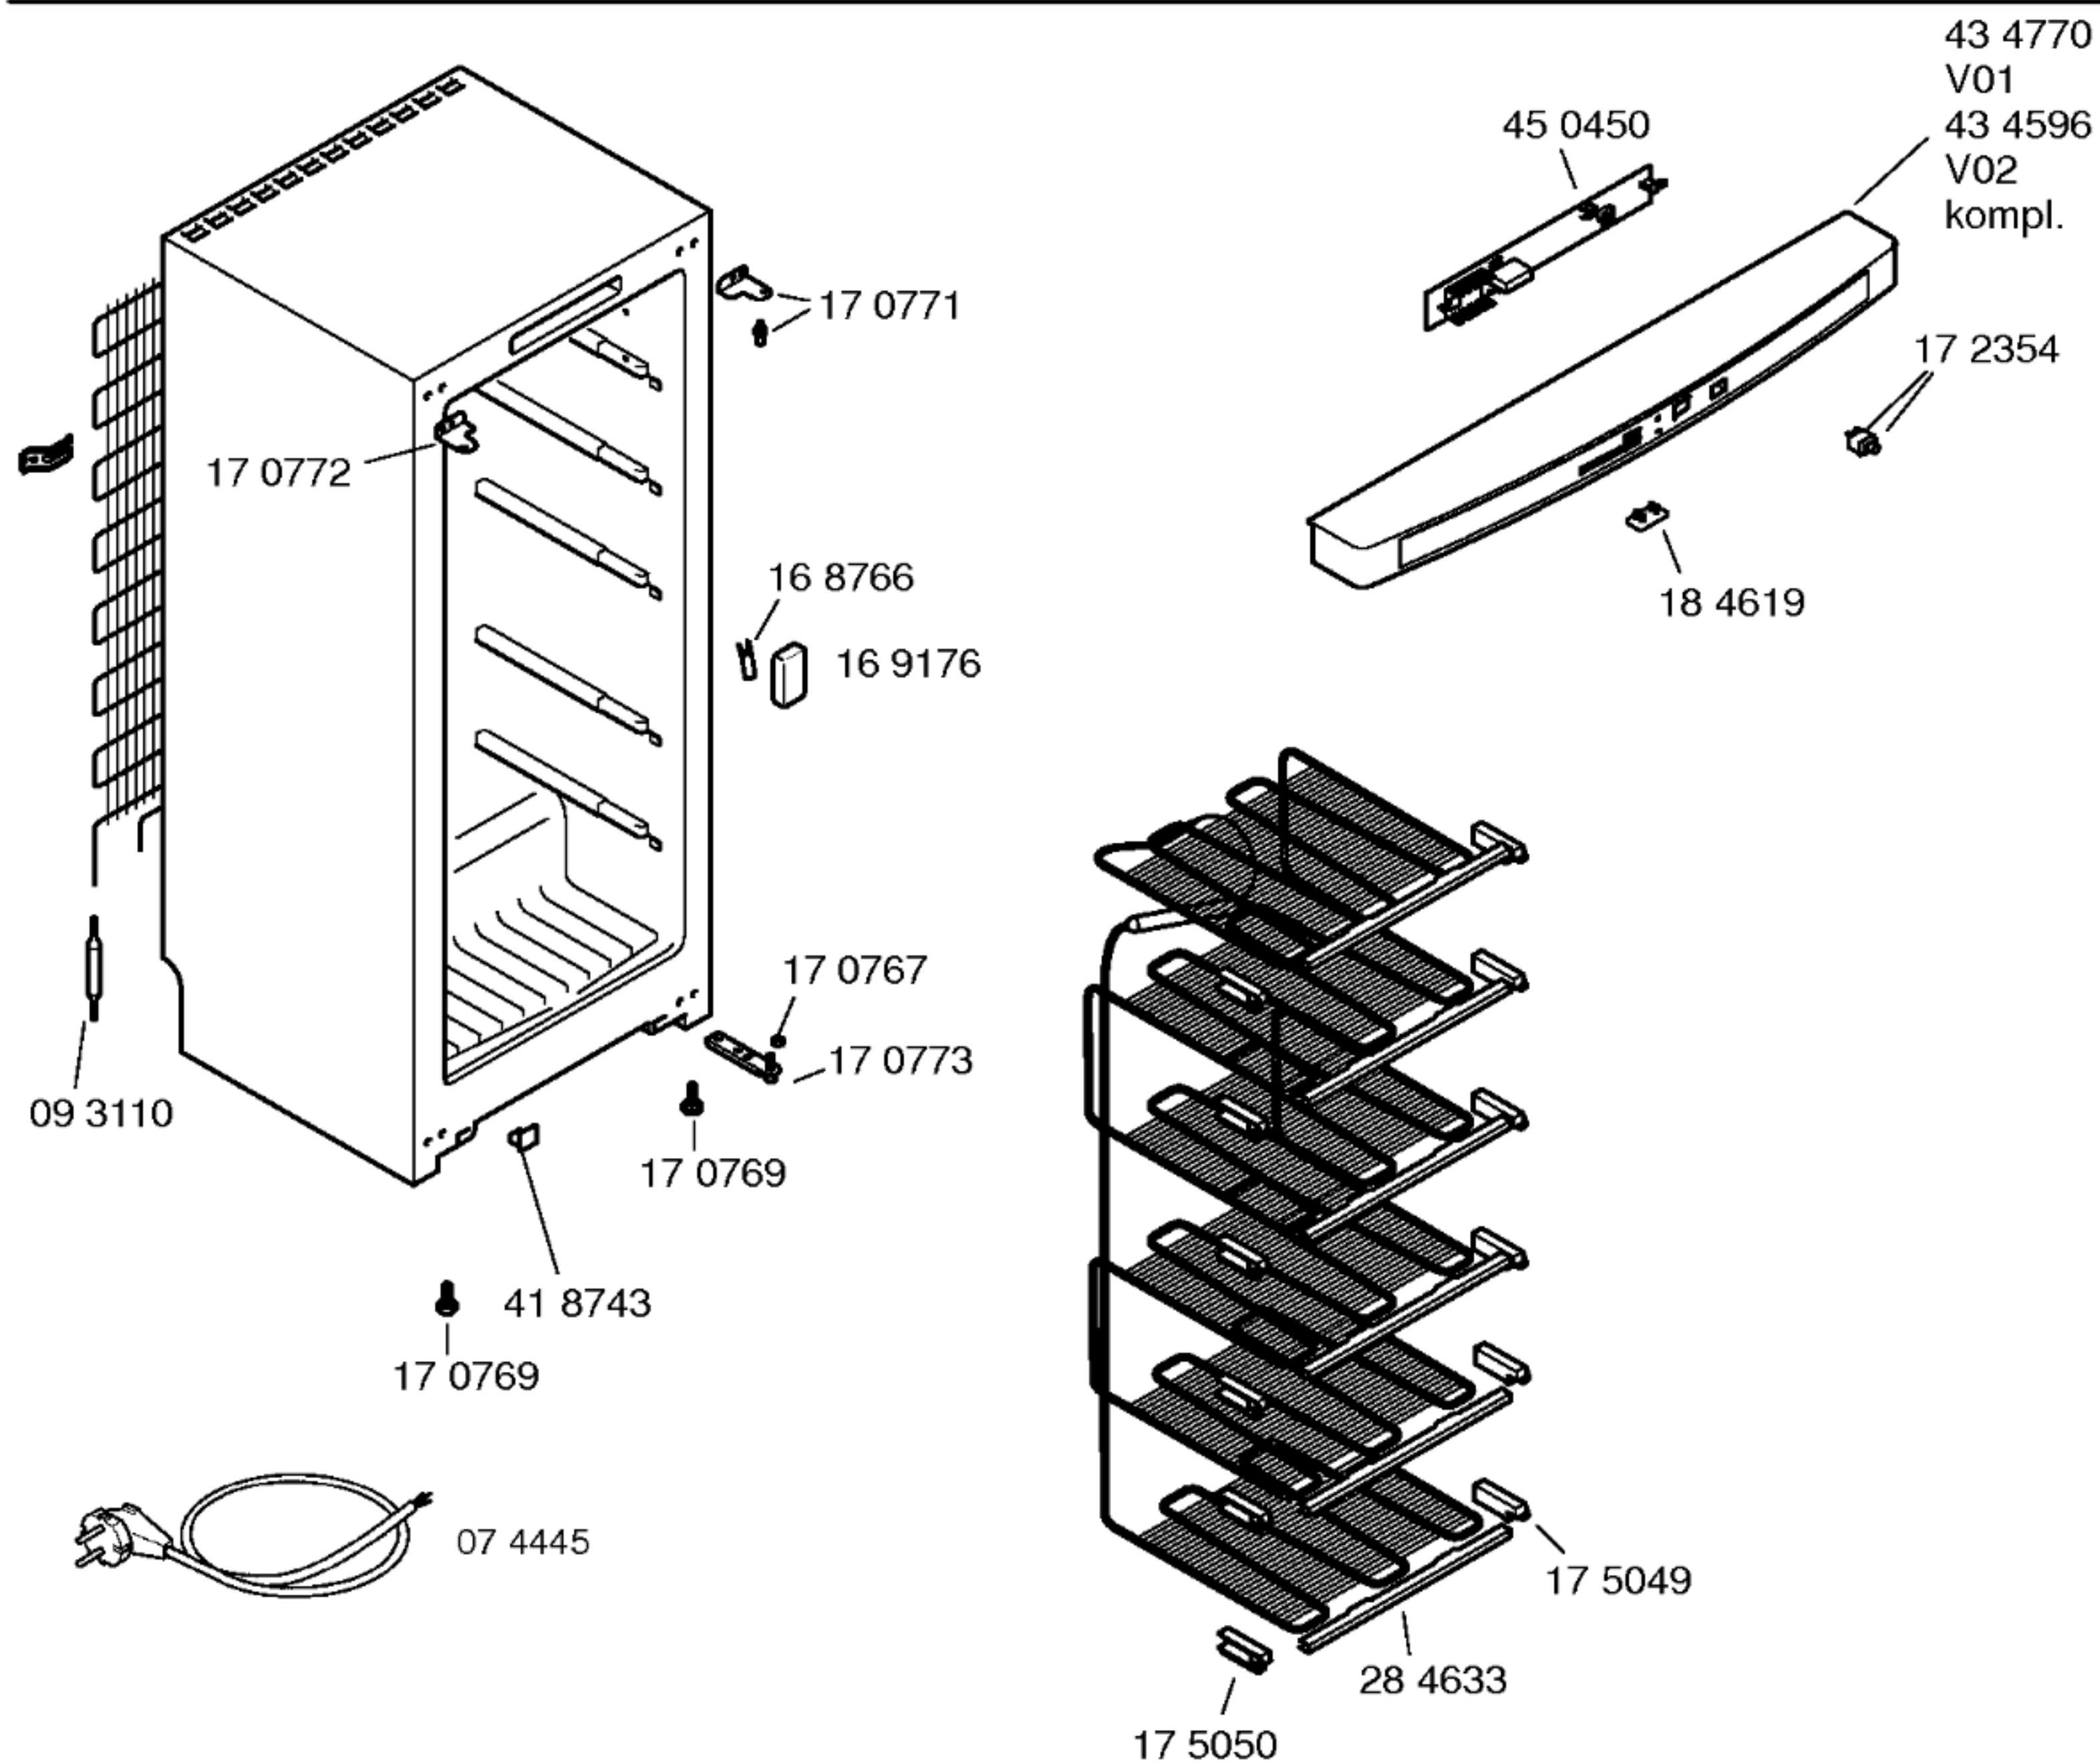


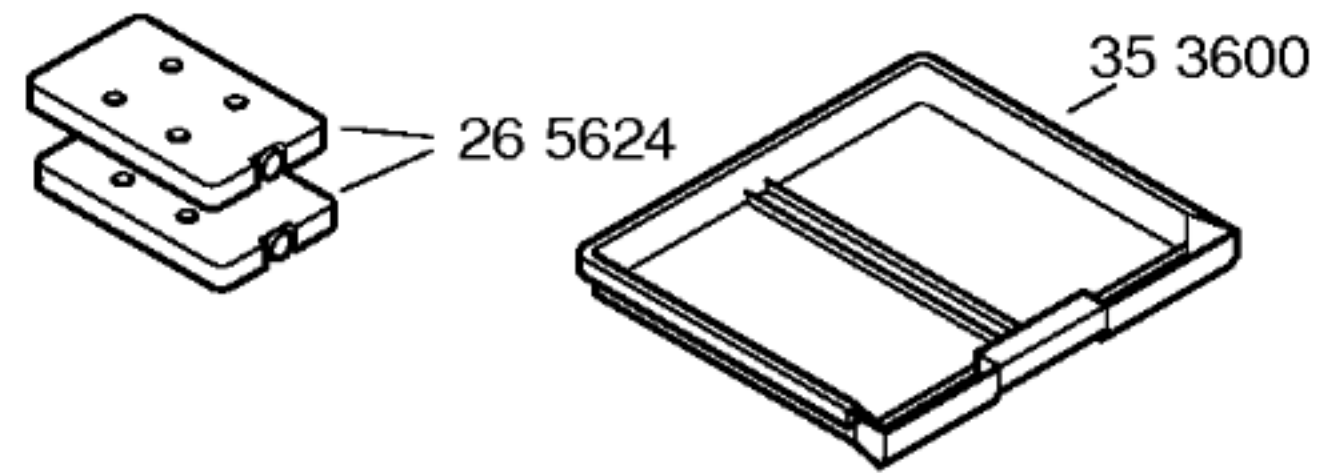


Mat. – Nr. – Konstante  
3740 . . . . .  
Gebrauchsanweisung  
58 6511  
(de,en,fr,it,nl)  
58 6709  
(da,no,sv,fi,es,pt)  
Montageanleitung  
58 0241  
Beistellsatz  
26 5627

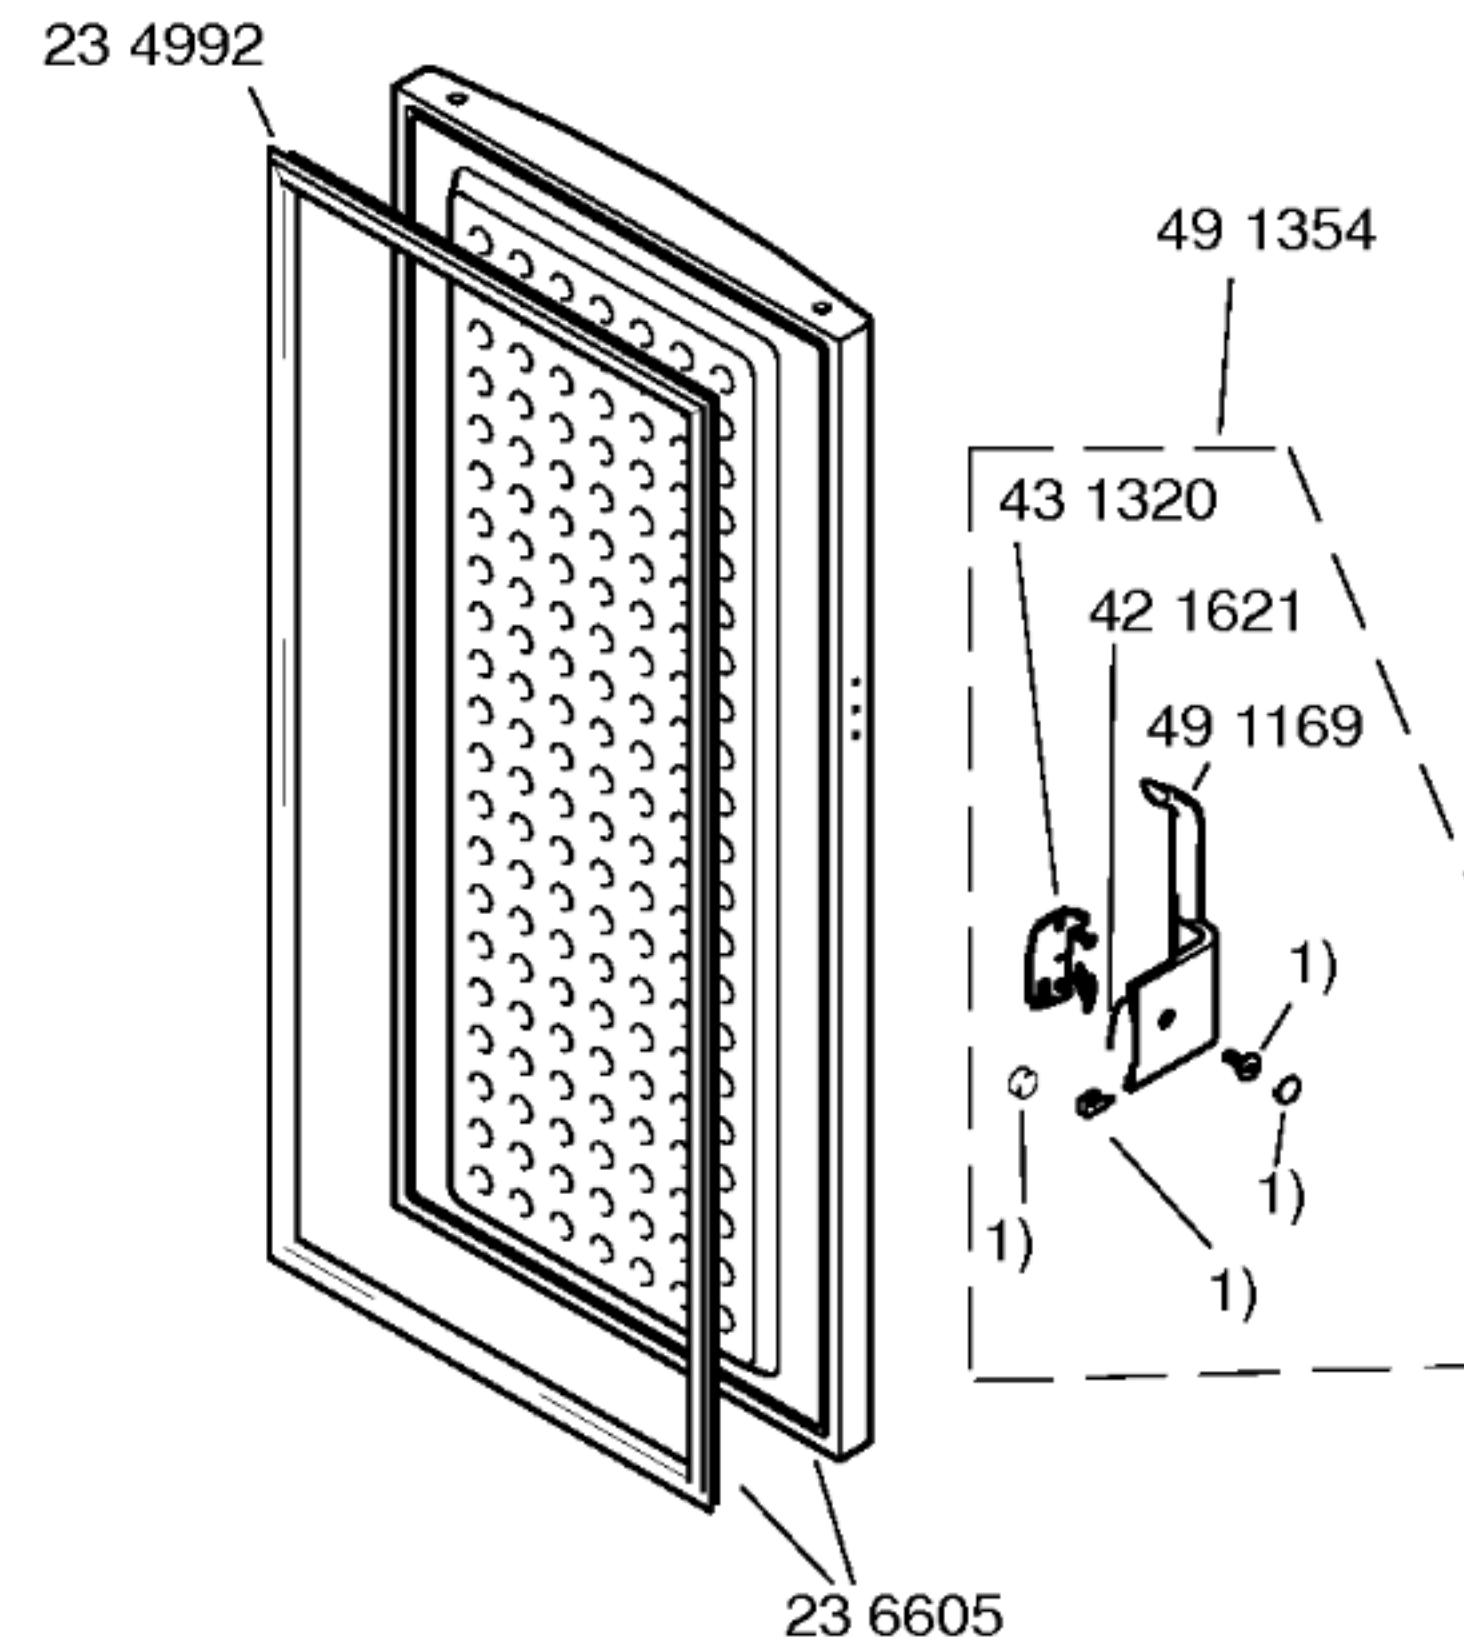

1) Kleinteilesatz  
42 2336

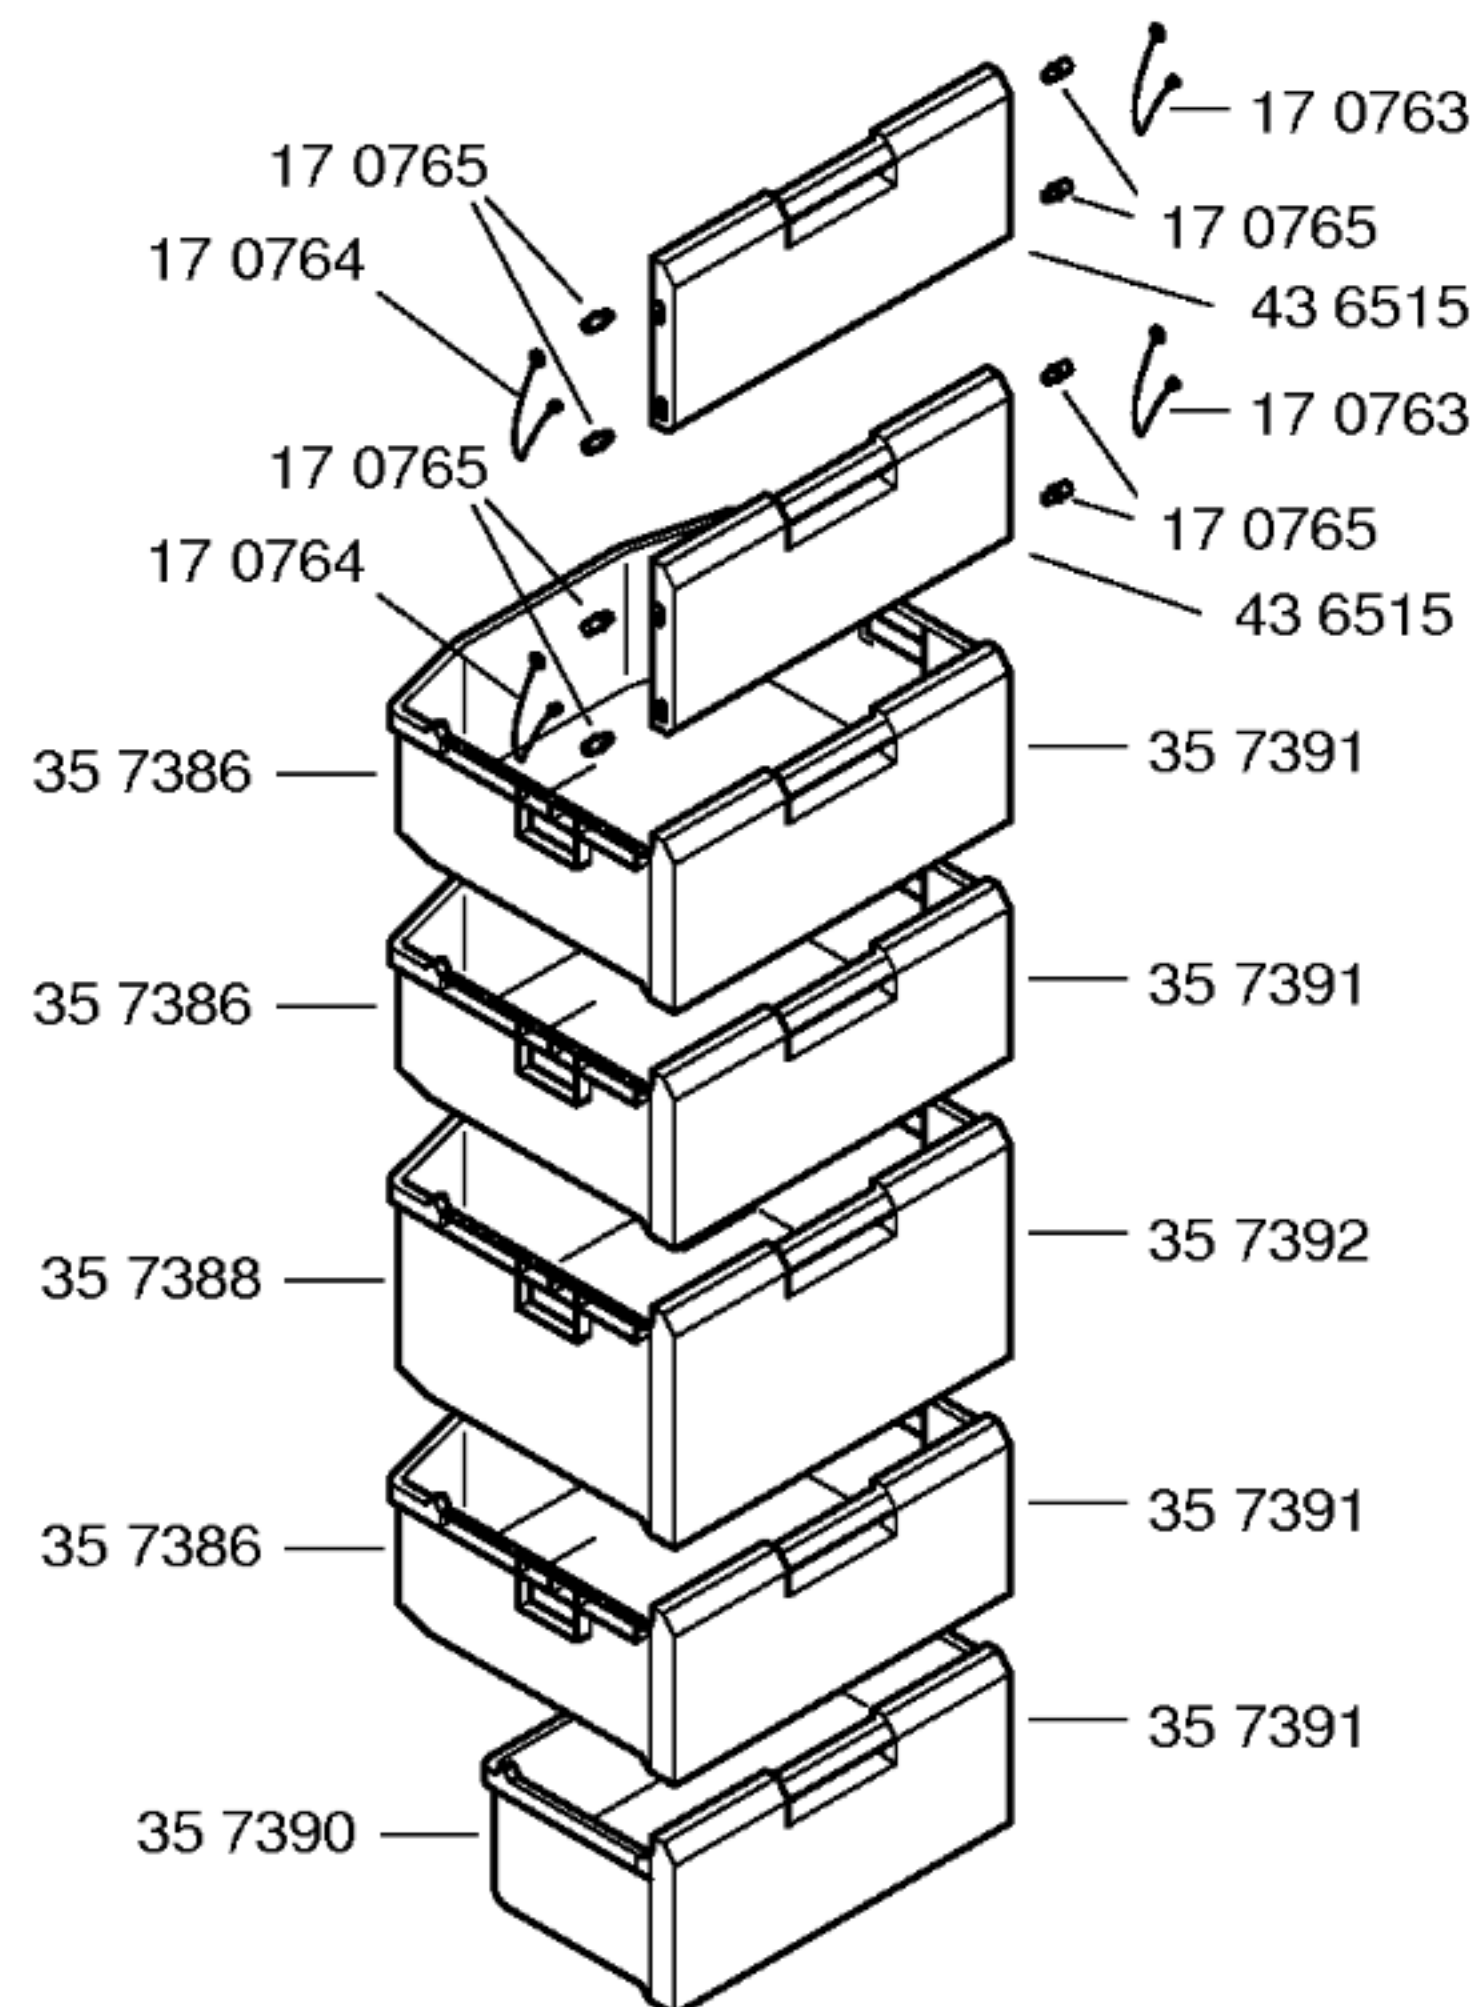



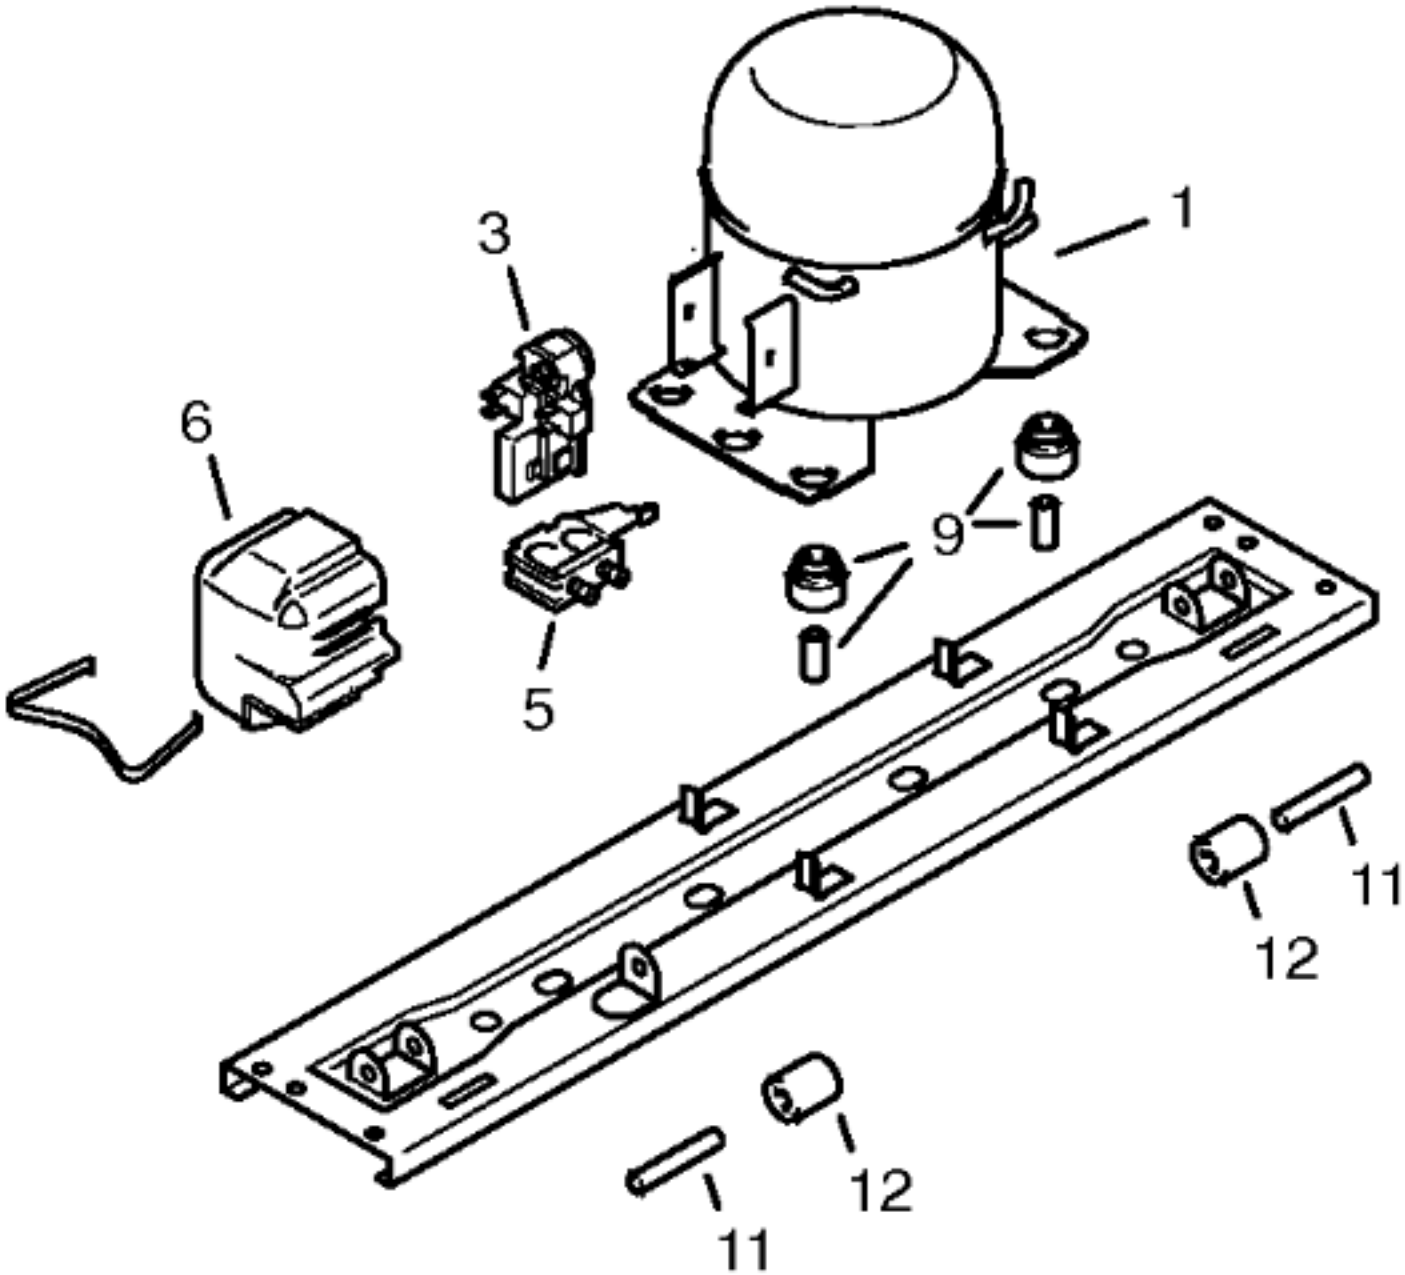

|      |            |  |  |
|------|------------|--|--|
| Pos. | V01-V02    |  |  |
|      | Matsushita |  |  |
|      | DC 125 E   |  |  |
|      | 14 2131    |  |  |
| 2    |            |  |  |
| 3    | 17 2967    |  |  |
| 4    |            |  |  |
| 5    | 16 2549    |  |  |
| 6    | 16 6782    |  |  |
| 7    |            |  |  |
| 8    | 21 4604    |  |  |
| 9    | 05 0166    |  |  |
| 10   |            |  |  |
| 11   | 01 9017    |  |  |
| 12   | 01 1916    |  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |  |            |             |             |
|--------------------------------------------------------|--|------------|-------------|-------------|
| Verdichter/Compressor/Compresseur                      |  | Matsushita |             |             |
| Typ/Type                                               |  | DC 125 E   |             |             |
| Förderleistung/Delivery/Débit                          |  | l/h        | 2246        |             |
| Anlaufstrom/Starting current/Cour de démarrage         |  | A          | 9,2         |             |
| Widerstand/Resistance/Résistance                       |  | Ω          | 12,1        |             |
| Hi/aux                                                 |  | Ω          | 13,8        |             |
| Temp.–Regler/Thermostat                                |  |            |             |             |
| Typ/Type                                               |  |            |             |             |
| Regelstellung/Position                                 |  |            |             |             |
| Schaltwerte/Switching values                           |  | "warm"     |             |             |
| Valeurs de commutation                                 |  | "kalt"     |             |             |
|                                                        |  | "alarm"    |             |             |
| Füllmenge/Fill.quantity/Charge                         |  | R600a      | *           |             |
| Anschlußwert/Conn.load/Puiss. connectée                |  | W          | 120         |             |
| Heizung/Heater/Chauffage                               |  |            |             |             |
| Widerstand/Resistance/Résistance                       |  | Ω          |             |             |
| Leistung/Power/Puissance                               |  | W          |             |             |
| Ventilator/Blower/Ventilateur                          |  |            |             |             |
| Widerstand/Resistance/Résistance                       |  | Ω          |             |             |
| NTC–Fühler / Sensor                                    |  | °C         | kΩ          | °C          |
|                                                        |  | +10        | 9,95 ±0,18  | –18         |
|                                                        |  | +5         | 12,70 ±0,18 | –22         |
|                                                        |  | 0          | 16,33 ±0,16 | –26         |
|                                                        |  |            |             | 43,31 ±1,10 |
|                                                        |  |            |             | 54,66 ±1,59 |
|                                                        |  |            |             | 69,42 ±2,29 |
| Magnetventil/Magnetic valve/Electrovanne               |  |            |             |             |
| Widerstand/Resistance/Résistance                       |  | Ω          |             |             |
| Spannung/Voltage/Tension                               |  | V          |             |             |