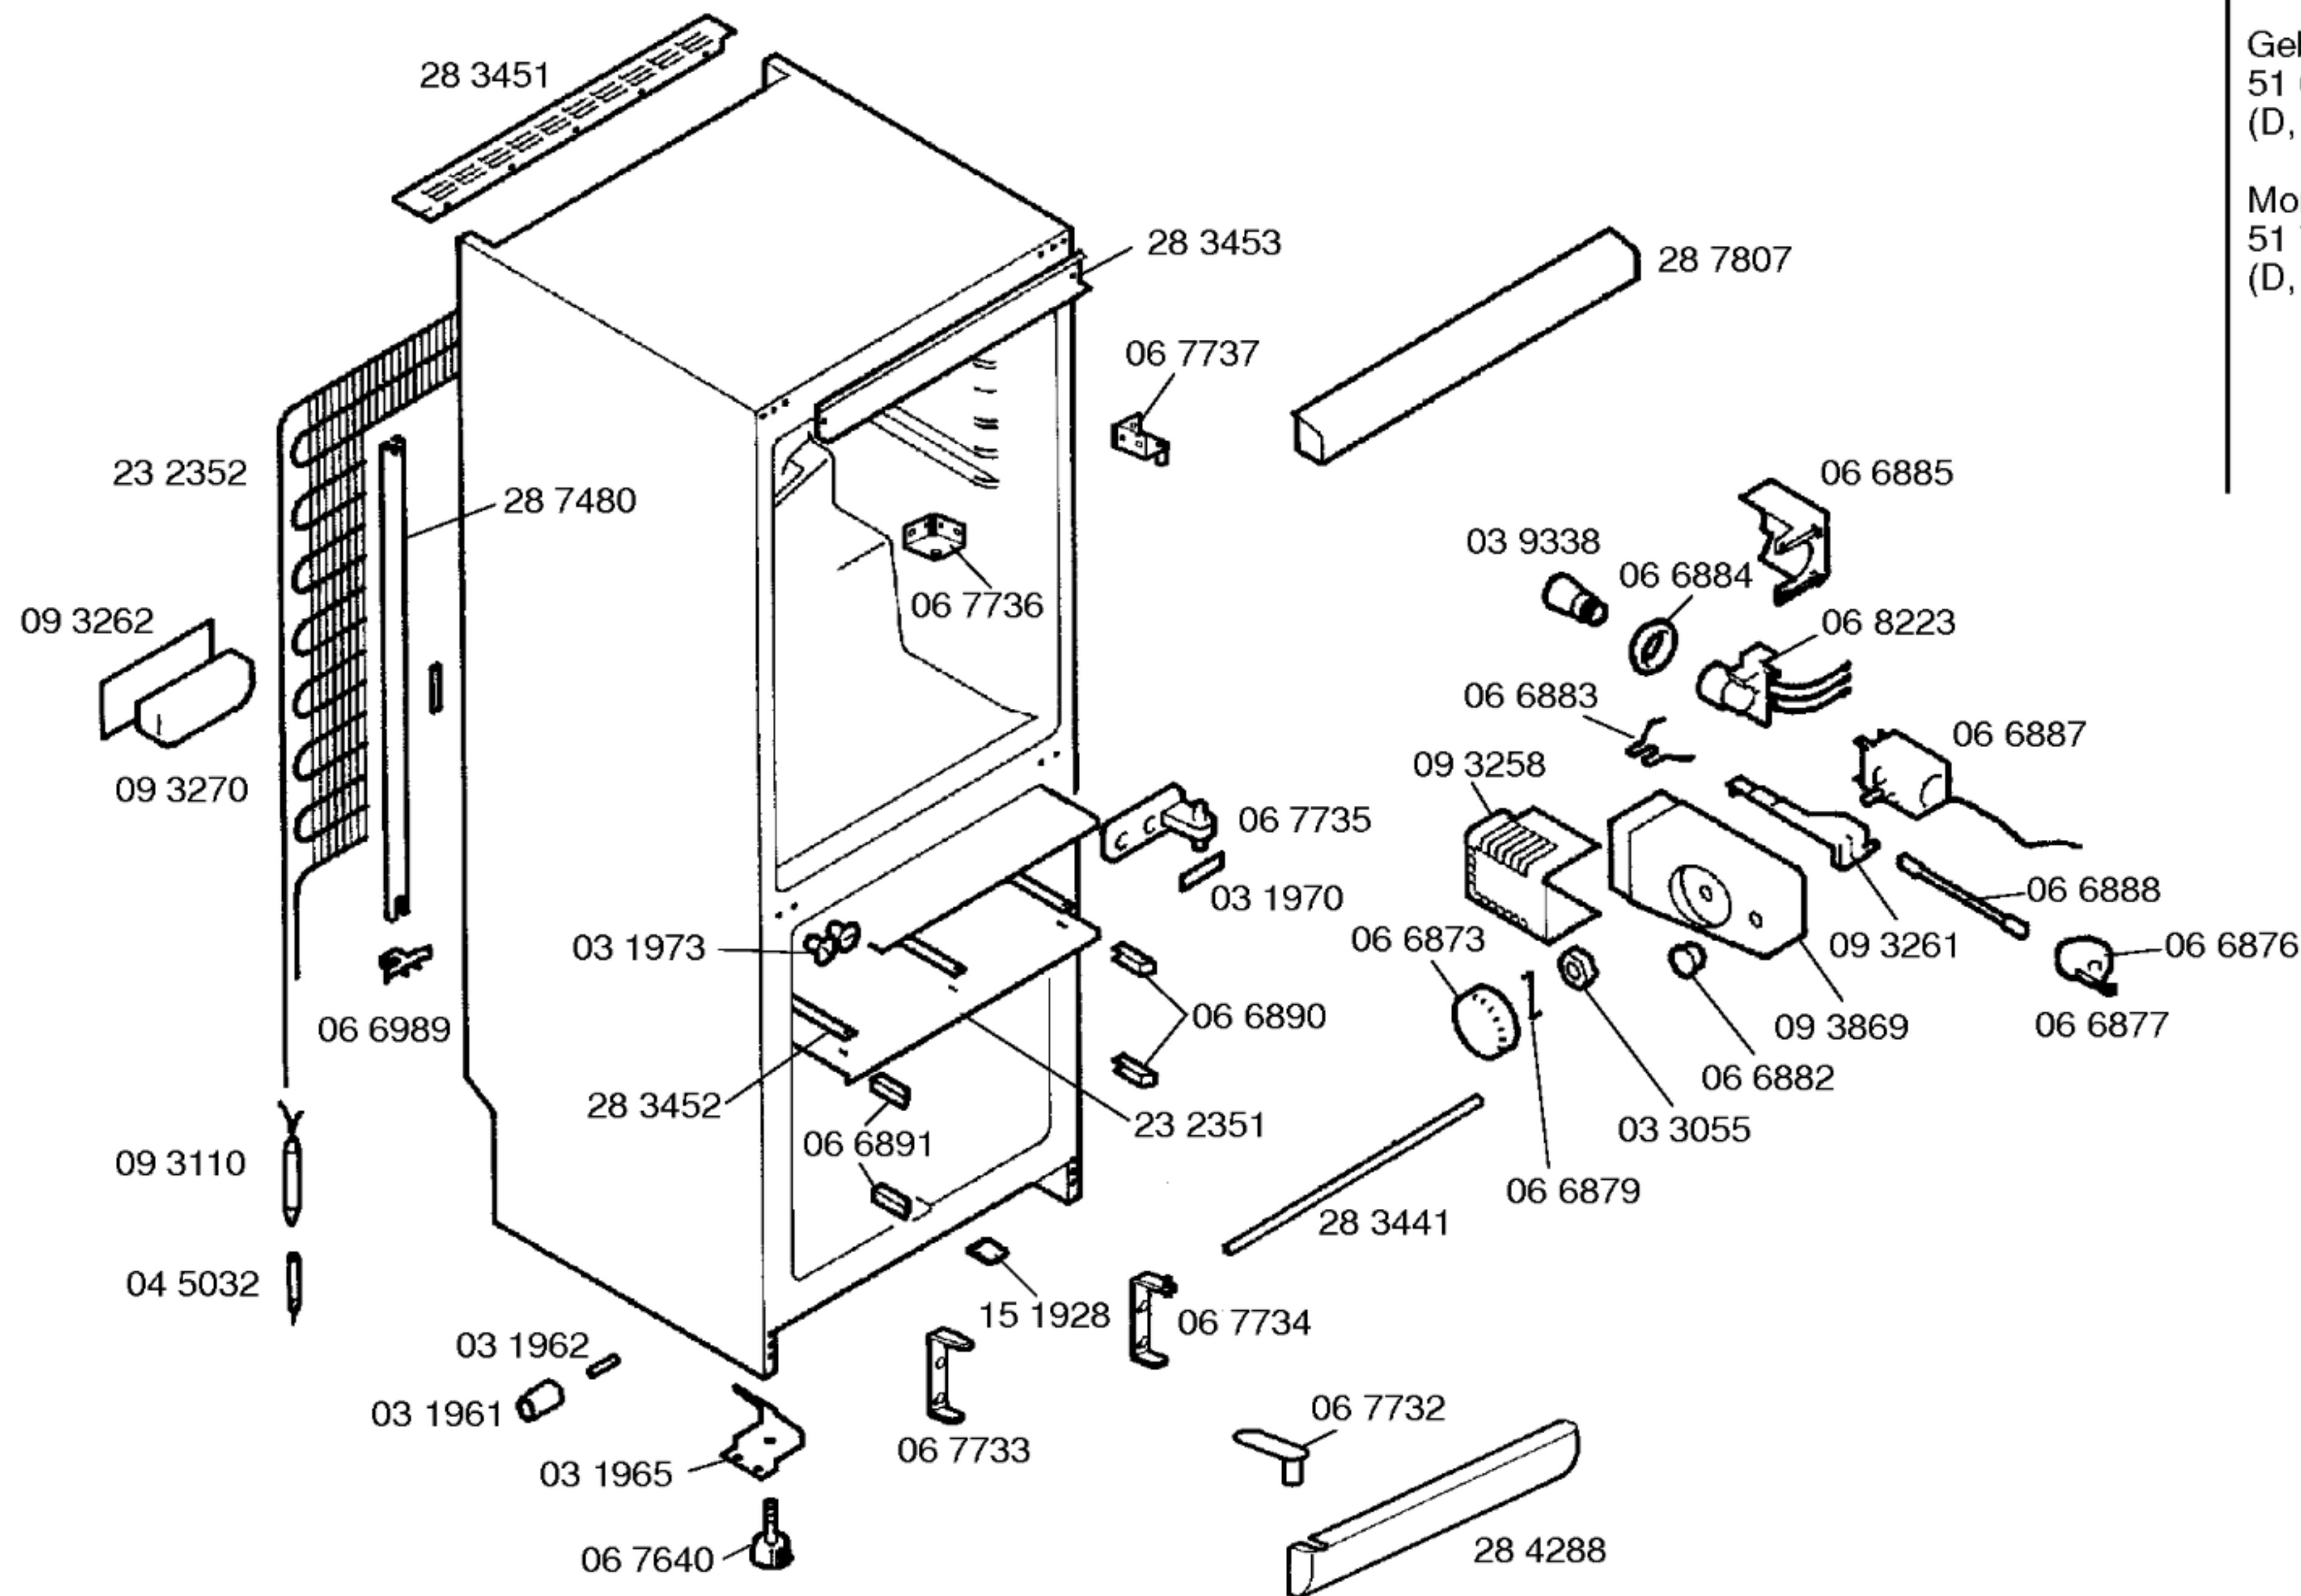
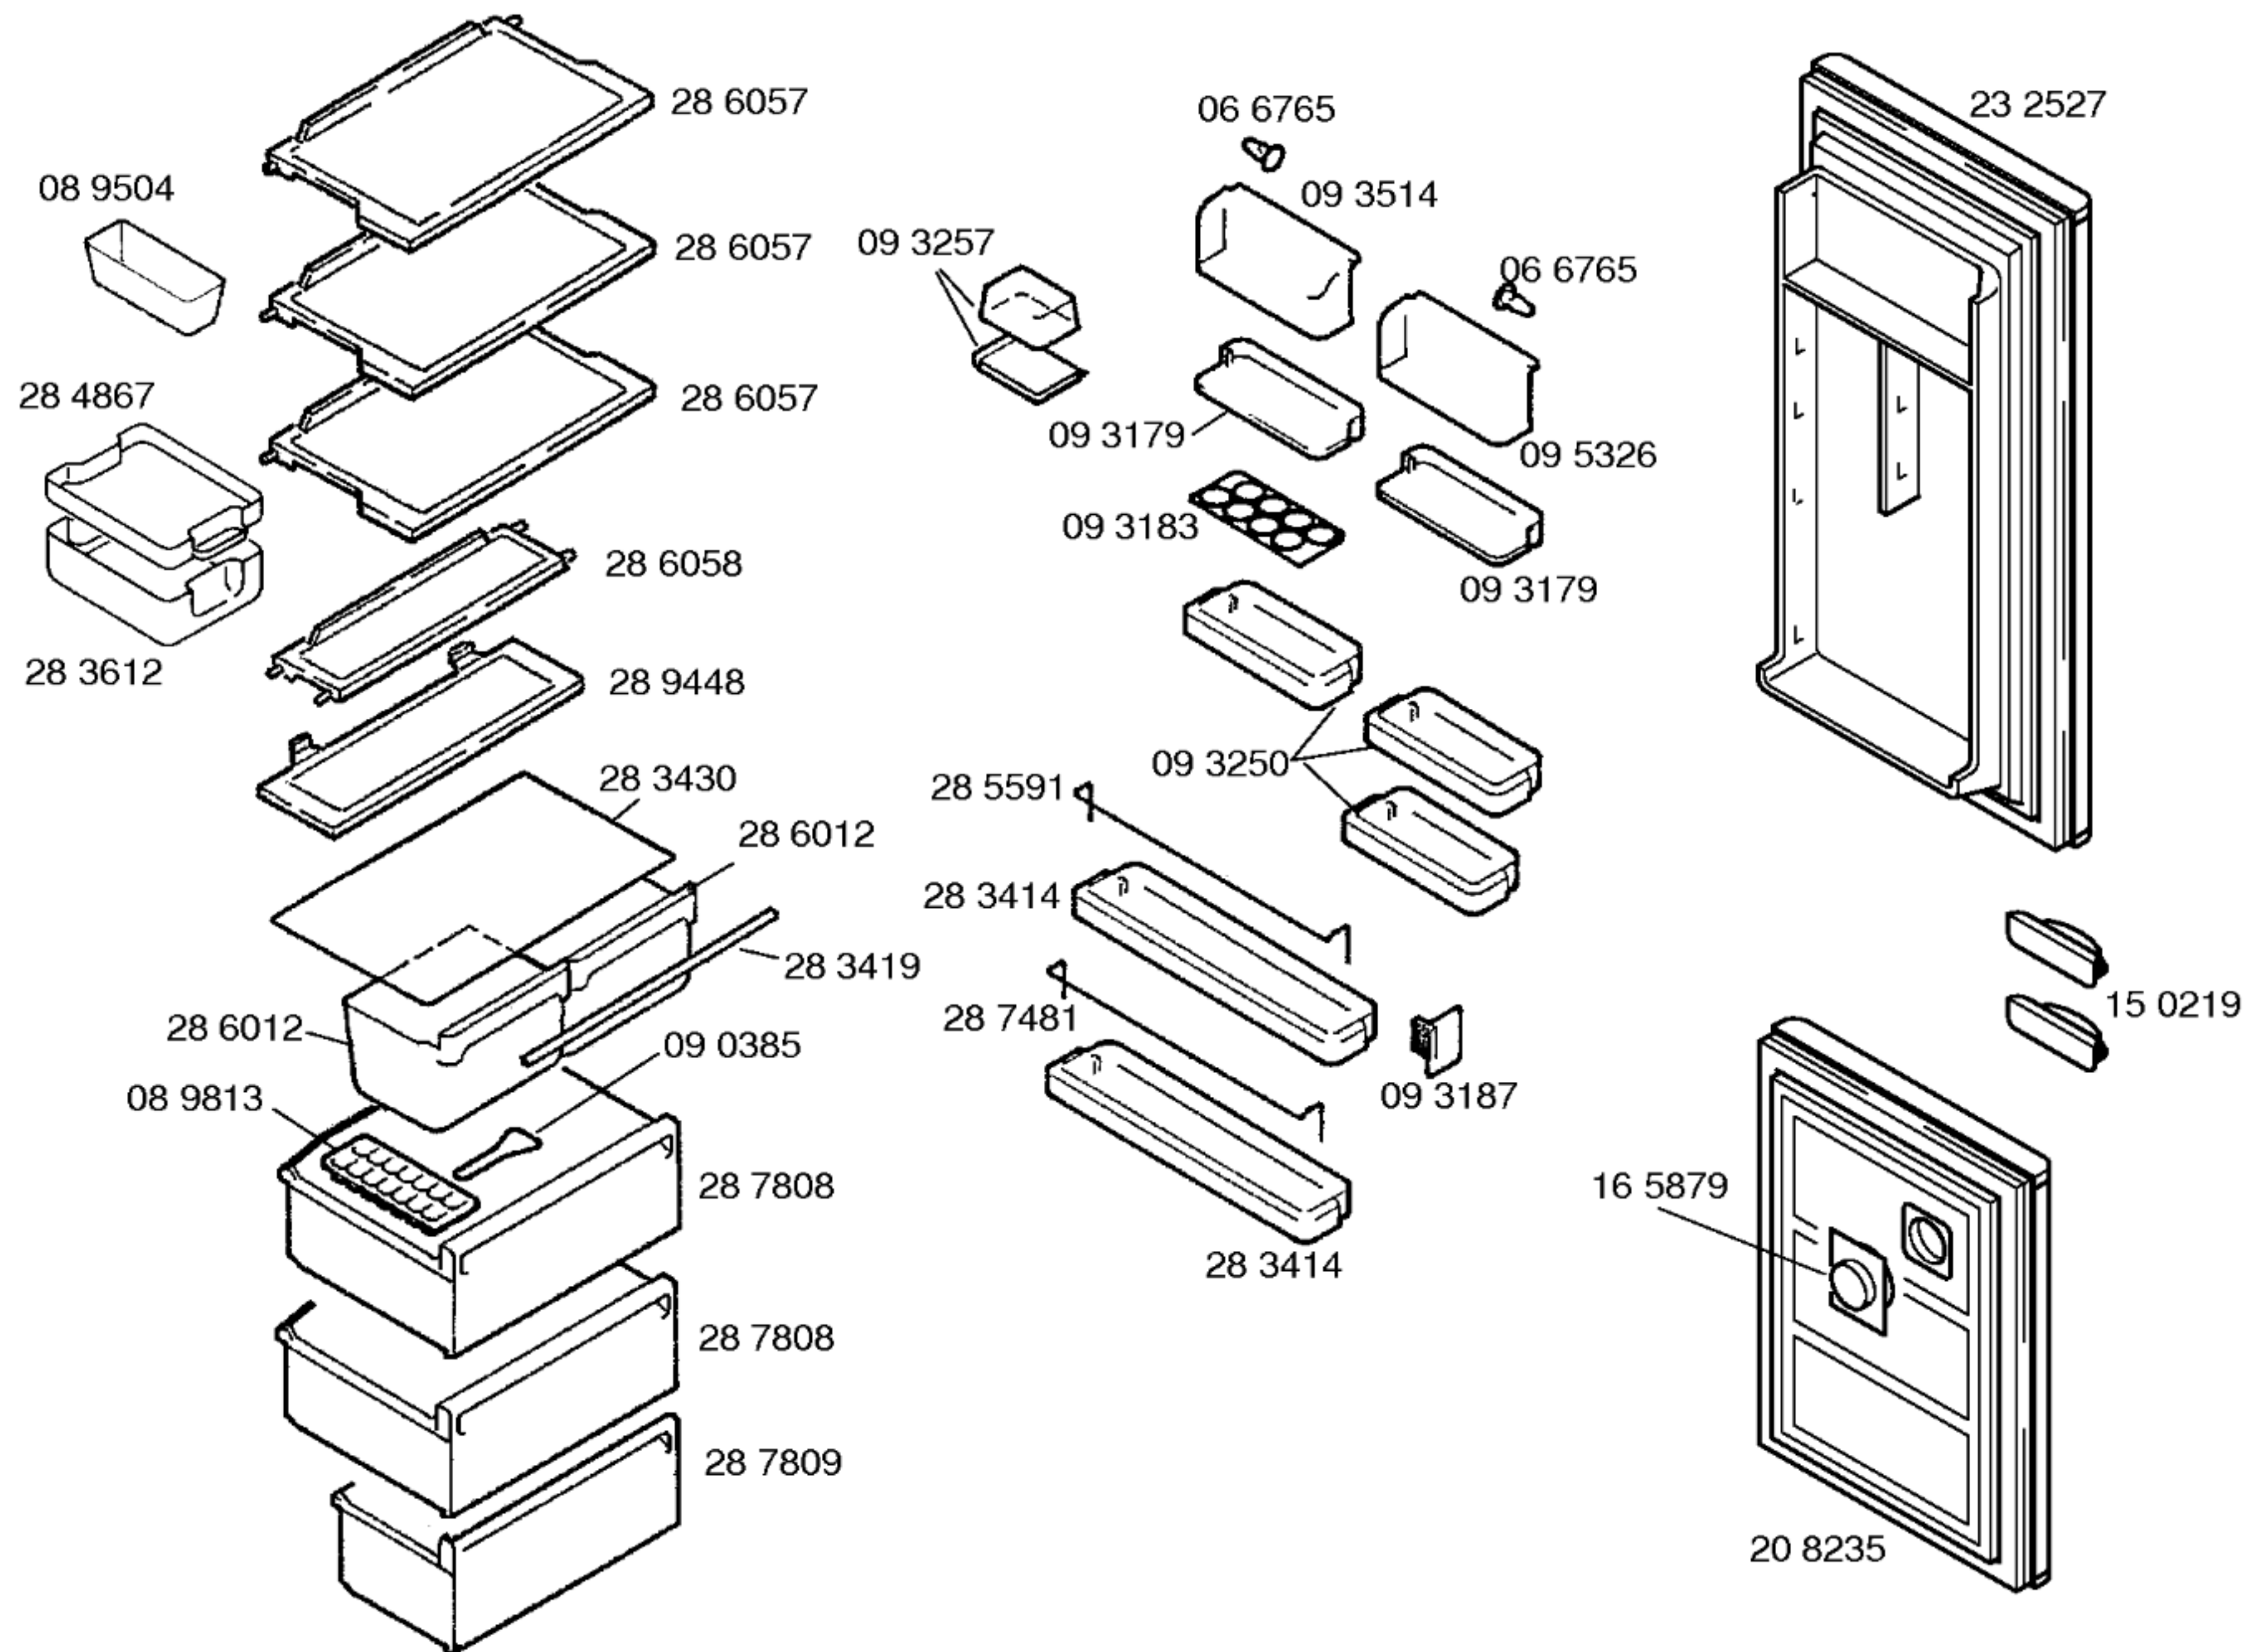
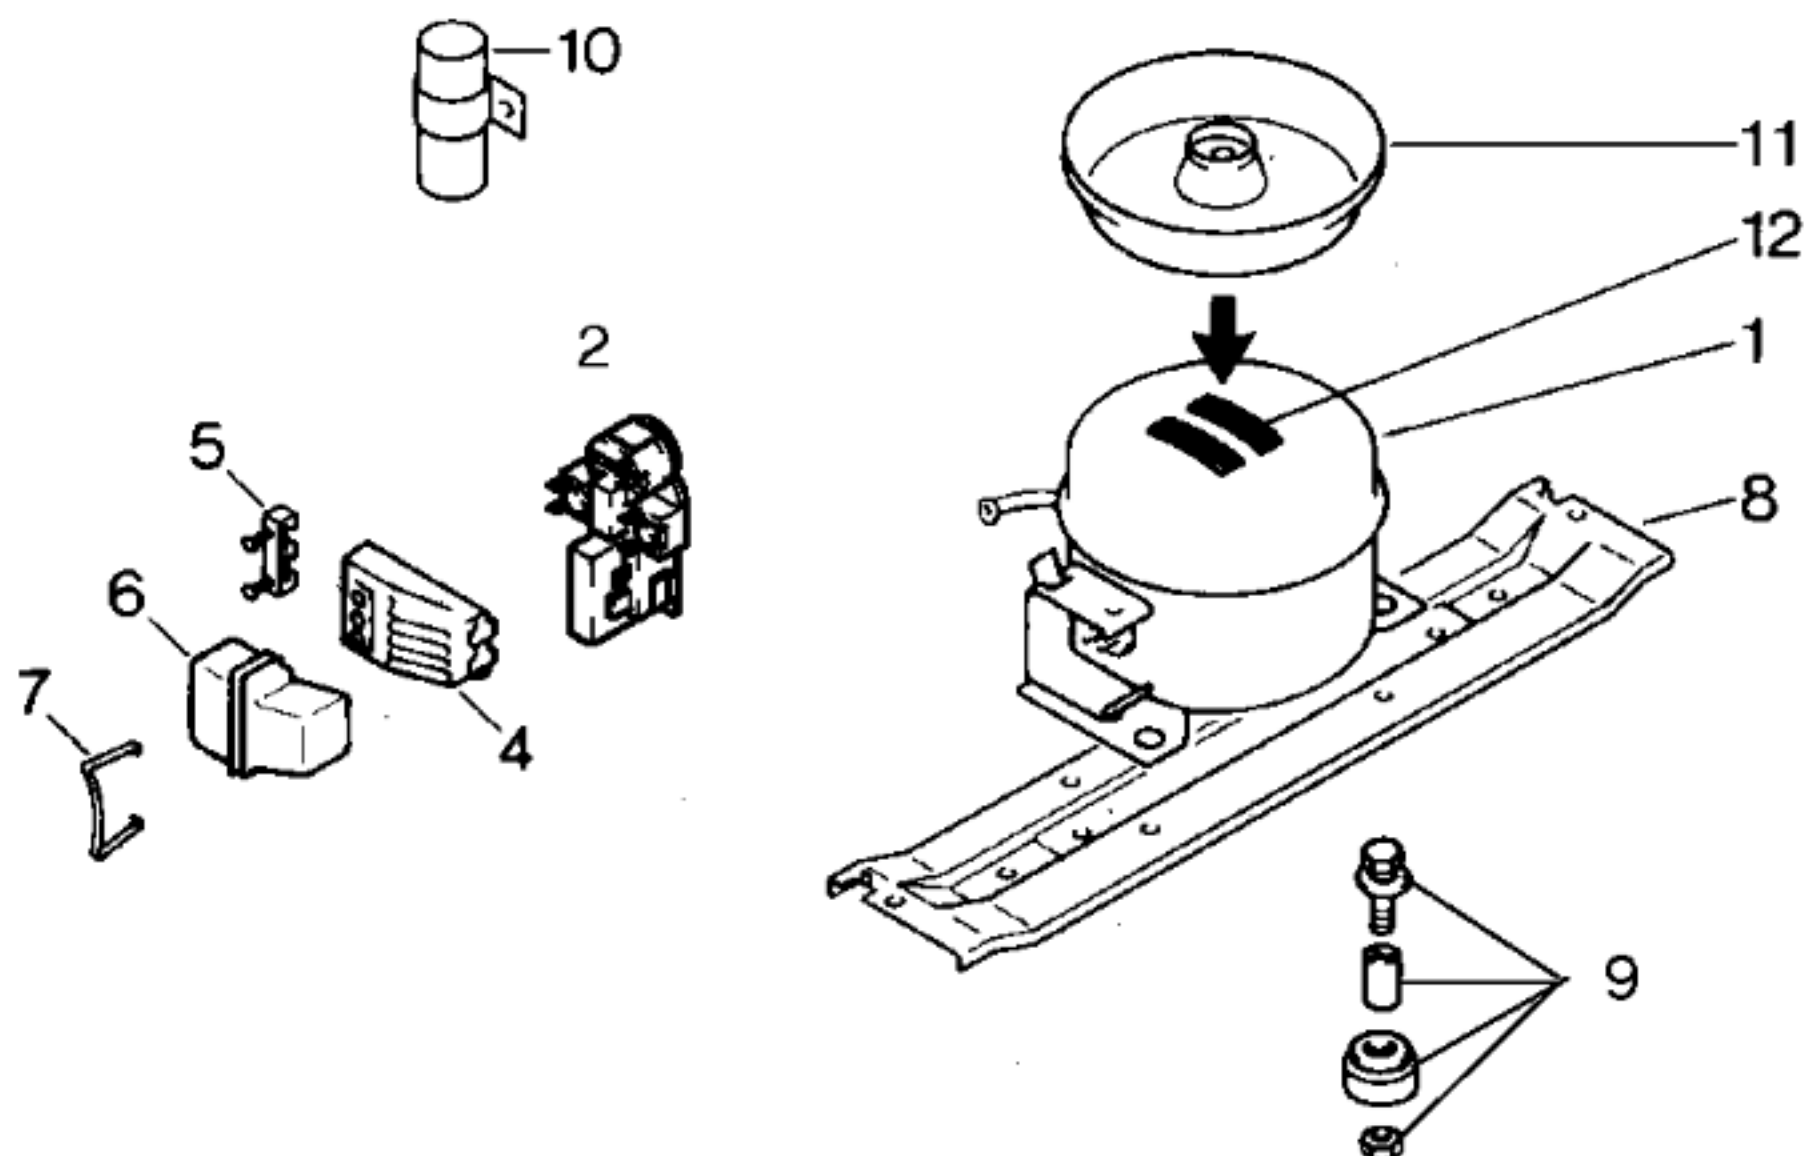


Ident – Nummern – Konstante  
3740Gebrauchsanweisung  
51 6162  
(D, GB, F, I, NL, E, P)Montageanweisung  
51 7252  
(D, GB, F, I, NL)

Ident - Nummern - Konstante  
3740 . . . . .

Ident – Nummern – Konstante  
3740 . . . . .

| Pos. | MATSUSHITA |  |
|------|------------|--|
|      | D91C18RA   |  |
| 1    | 14 1289    |  |
| 2    | 15 0603    |  |
| 3    |            |  |
| 4    |            |  |
| 5    |            |  |
| 6    |            |  |
| 7    |            |  |
| 8    | 28 0162    |  |
| 9    | 05 0166    |  |
| 10   |            |  |
| 11   | 08 5182    |  |
| 12   |            |  |
| 13   |            |  |

## TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS

|                                                                                                                                                                                                                                               |                                                          |     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-----|
| Verdichter/Compressor/Compresseur/Compresor<br>Typ/Type/Tipo<br>Förderleistung/Delivery/Debit/Aspiración l/h<br>Anlaufstrom/Starting current/Cour.démarrage/Int.arranque A<br>Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm<br>Hi/aux. | MATSUSH.<br>D91C18RA<br><br>10,89<br>8,53<br>21,10       |     |
| Temp.Reyler/Thermostat/Termostato<br>Typ/Type/Tipo<br>Reglerstellung/Position/Conexión<br>Schaltwerte/Switching values/ ..ein/conex.°C<br>Valeurs de commutation/Desconex. ..aus"/descon.<br>(..abtaven' od) ..alarm'                         | DANFOSS<br>077B64/41<br>MAX. MIN.<br>+ 5° —<br>-13° -33° |     |
| Füllmenge/Fill. quantily/Charge/Carga 134a                                                                                                                                                                                                    | g                                                        | 145 |
| Anschlusswert/Comm. load/Puiss. Connect./Potenc.                                                                                                                                                                                              | W                                                        | 215 |
| Heizung/Heater/Chauflage/Resistenc.descong.<br>Widerstand/Resistance/Resistencia<br>Leistung/Power/Puissance/Potencia                                                                                                                         | Ohm<br>W                                                 |     |
| Ventilador/Blower/Ventilateur/Ventilador<br>Widerstand/Resistance/Resistencia                                                                                                                                                                 | Ohm                                                      |     |
| Magnetventil/Magnetic valve/Electrovanne/Electrovalvula<br>Widerstand/Resistance/Resistencia<br>Spannung/Voltage/Tension/Tensión                                                                                                              | Ohm<br>V                                                 |     |
| Temp.Reyler/Thermostat/Termostato ambiente para<br>ventilador refrigerador                                                                                                                                                                    |                                                          |     |