


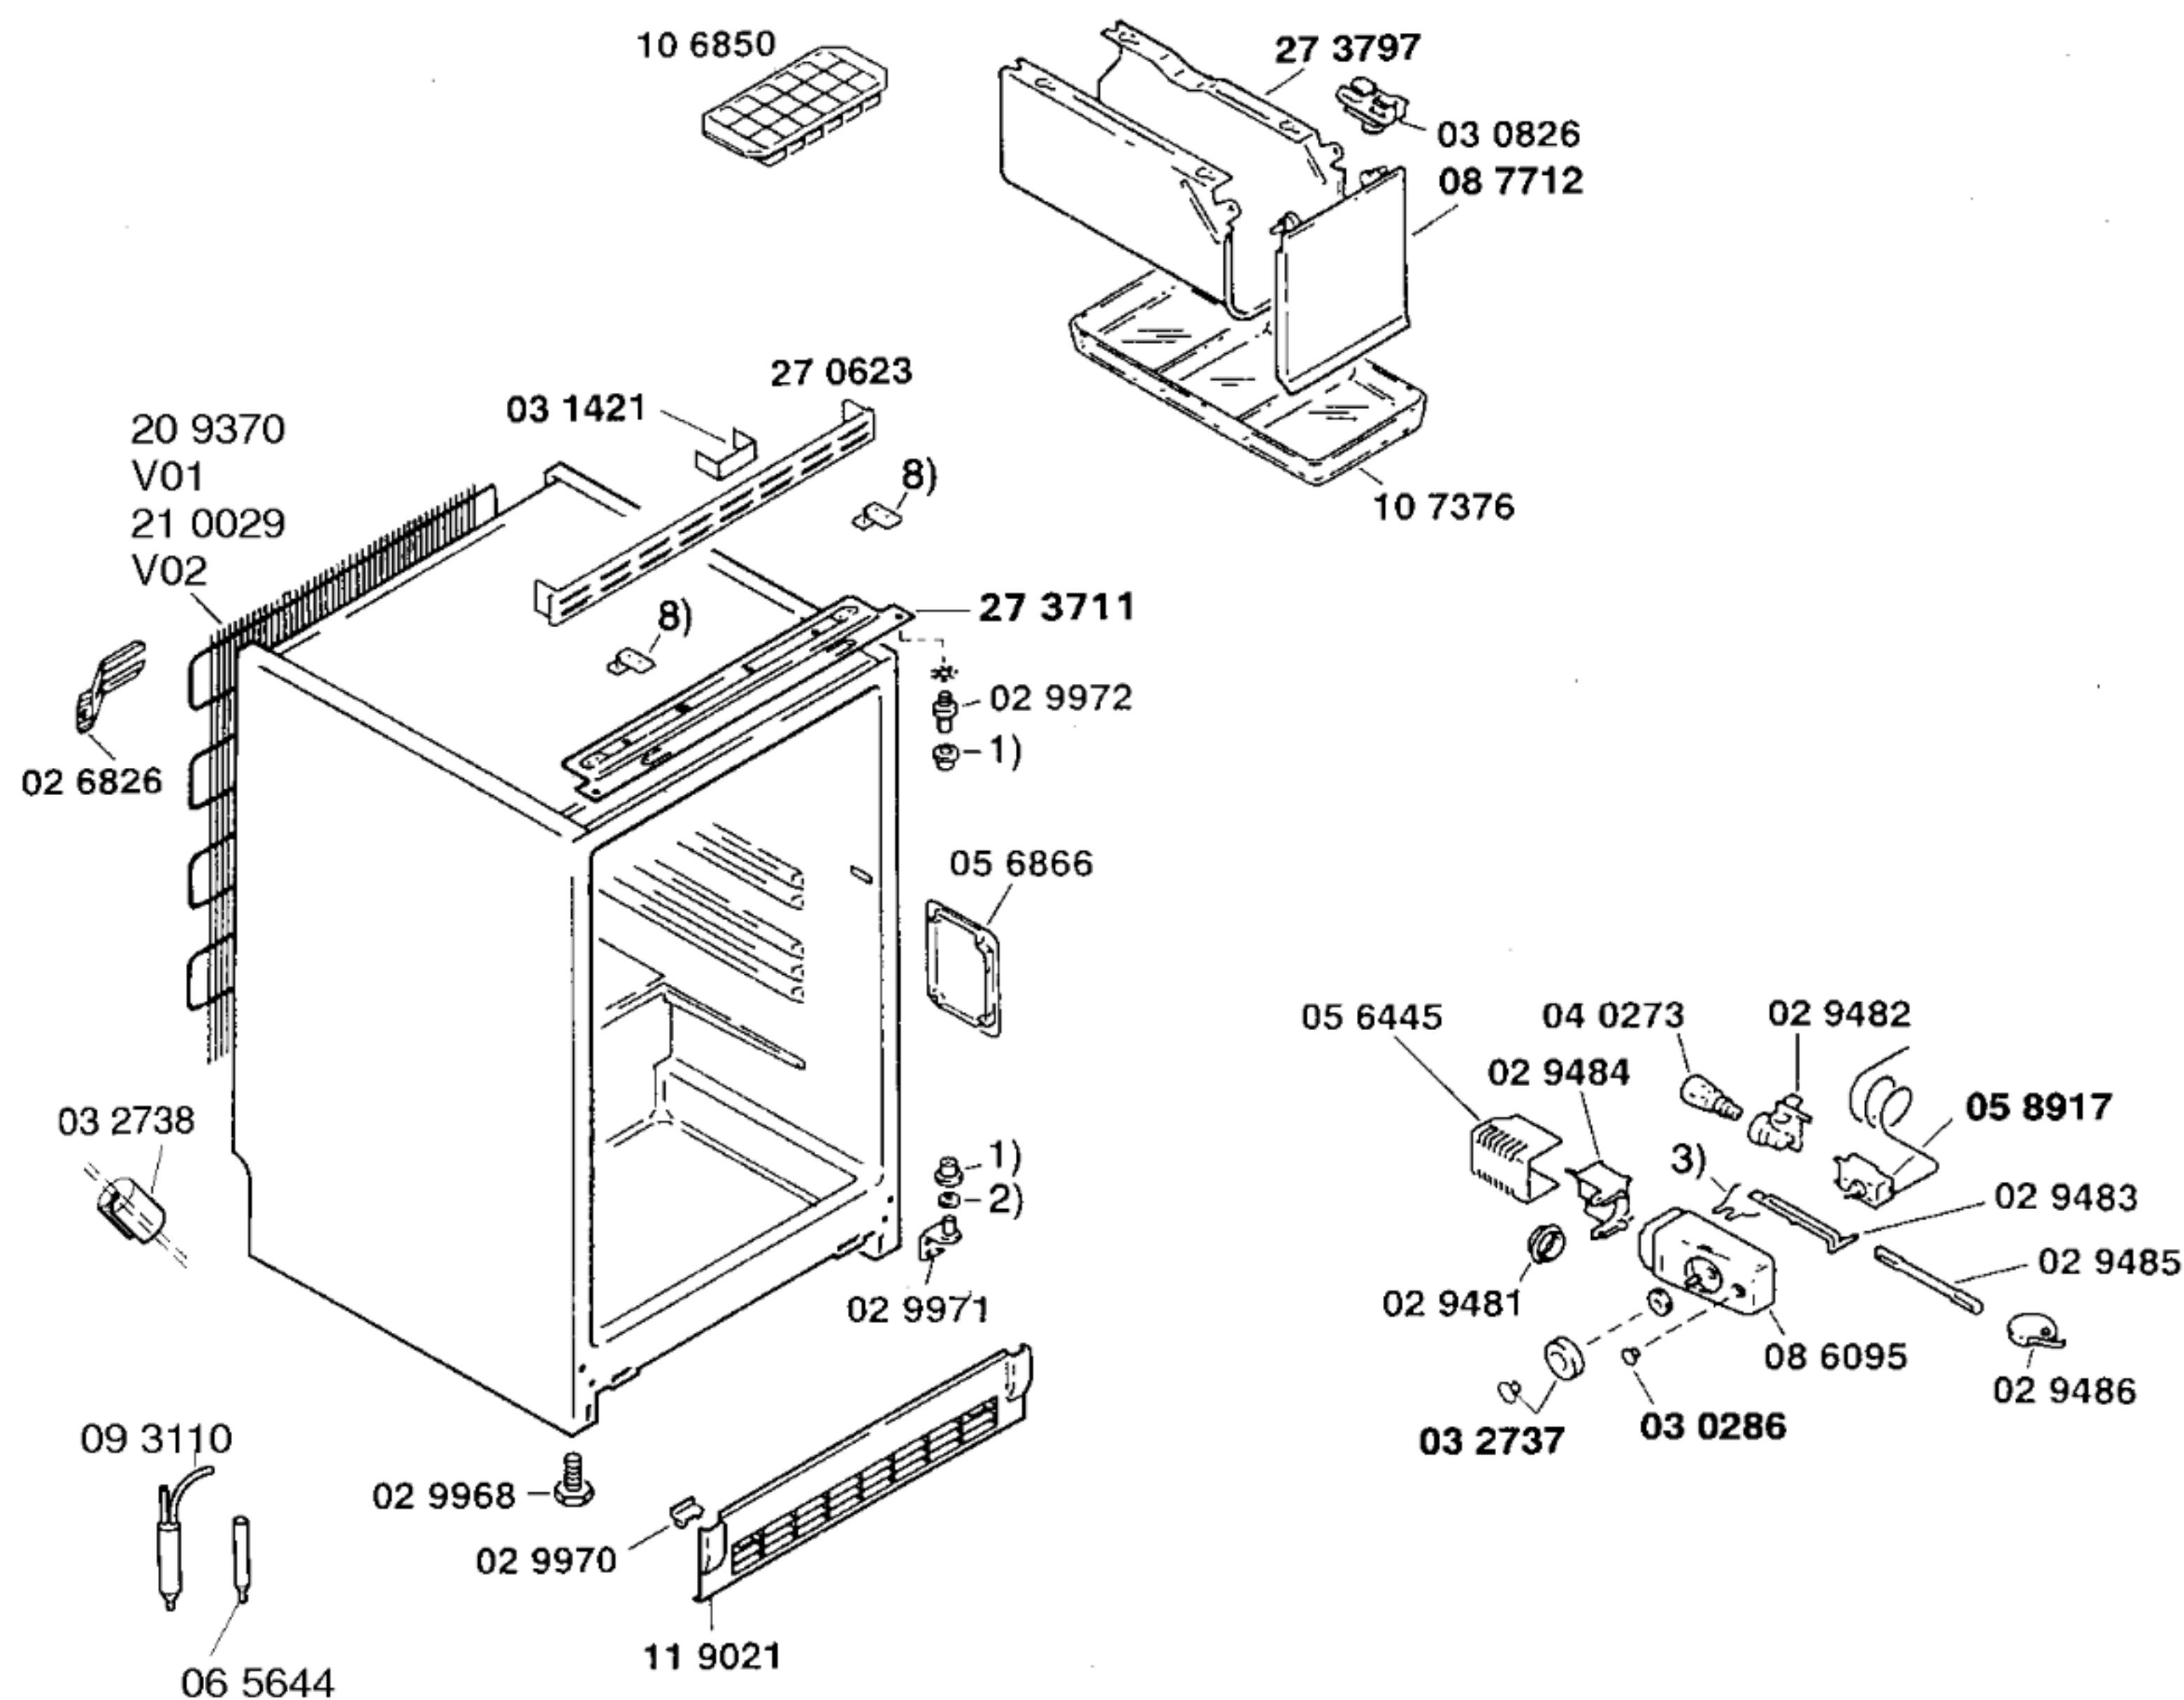


51 4329
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,E,P,DK,N)
51 3638
Montageanweisung
(D,GB,F,I,NL,S,SF,E,P,DK,N)


- 1) 01 9257
- 2) 02 0605
- 3) 02 9480
- 8) 03 0891

Zubehör

Dekorrahmen
Z4100B1, braun
Z4100W1, weiss

**Wandabschluss-
leiste
Z4310X1**

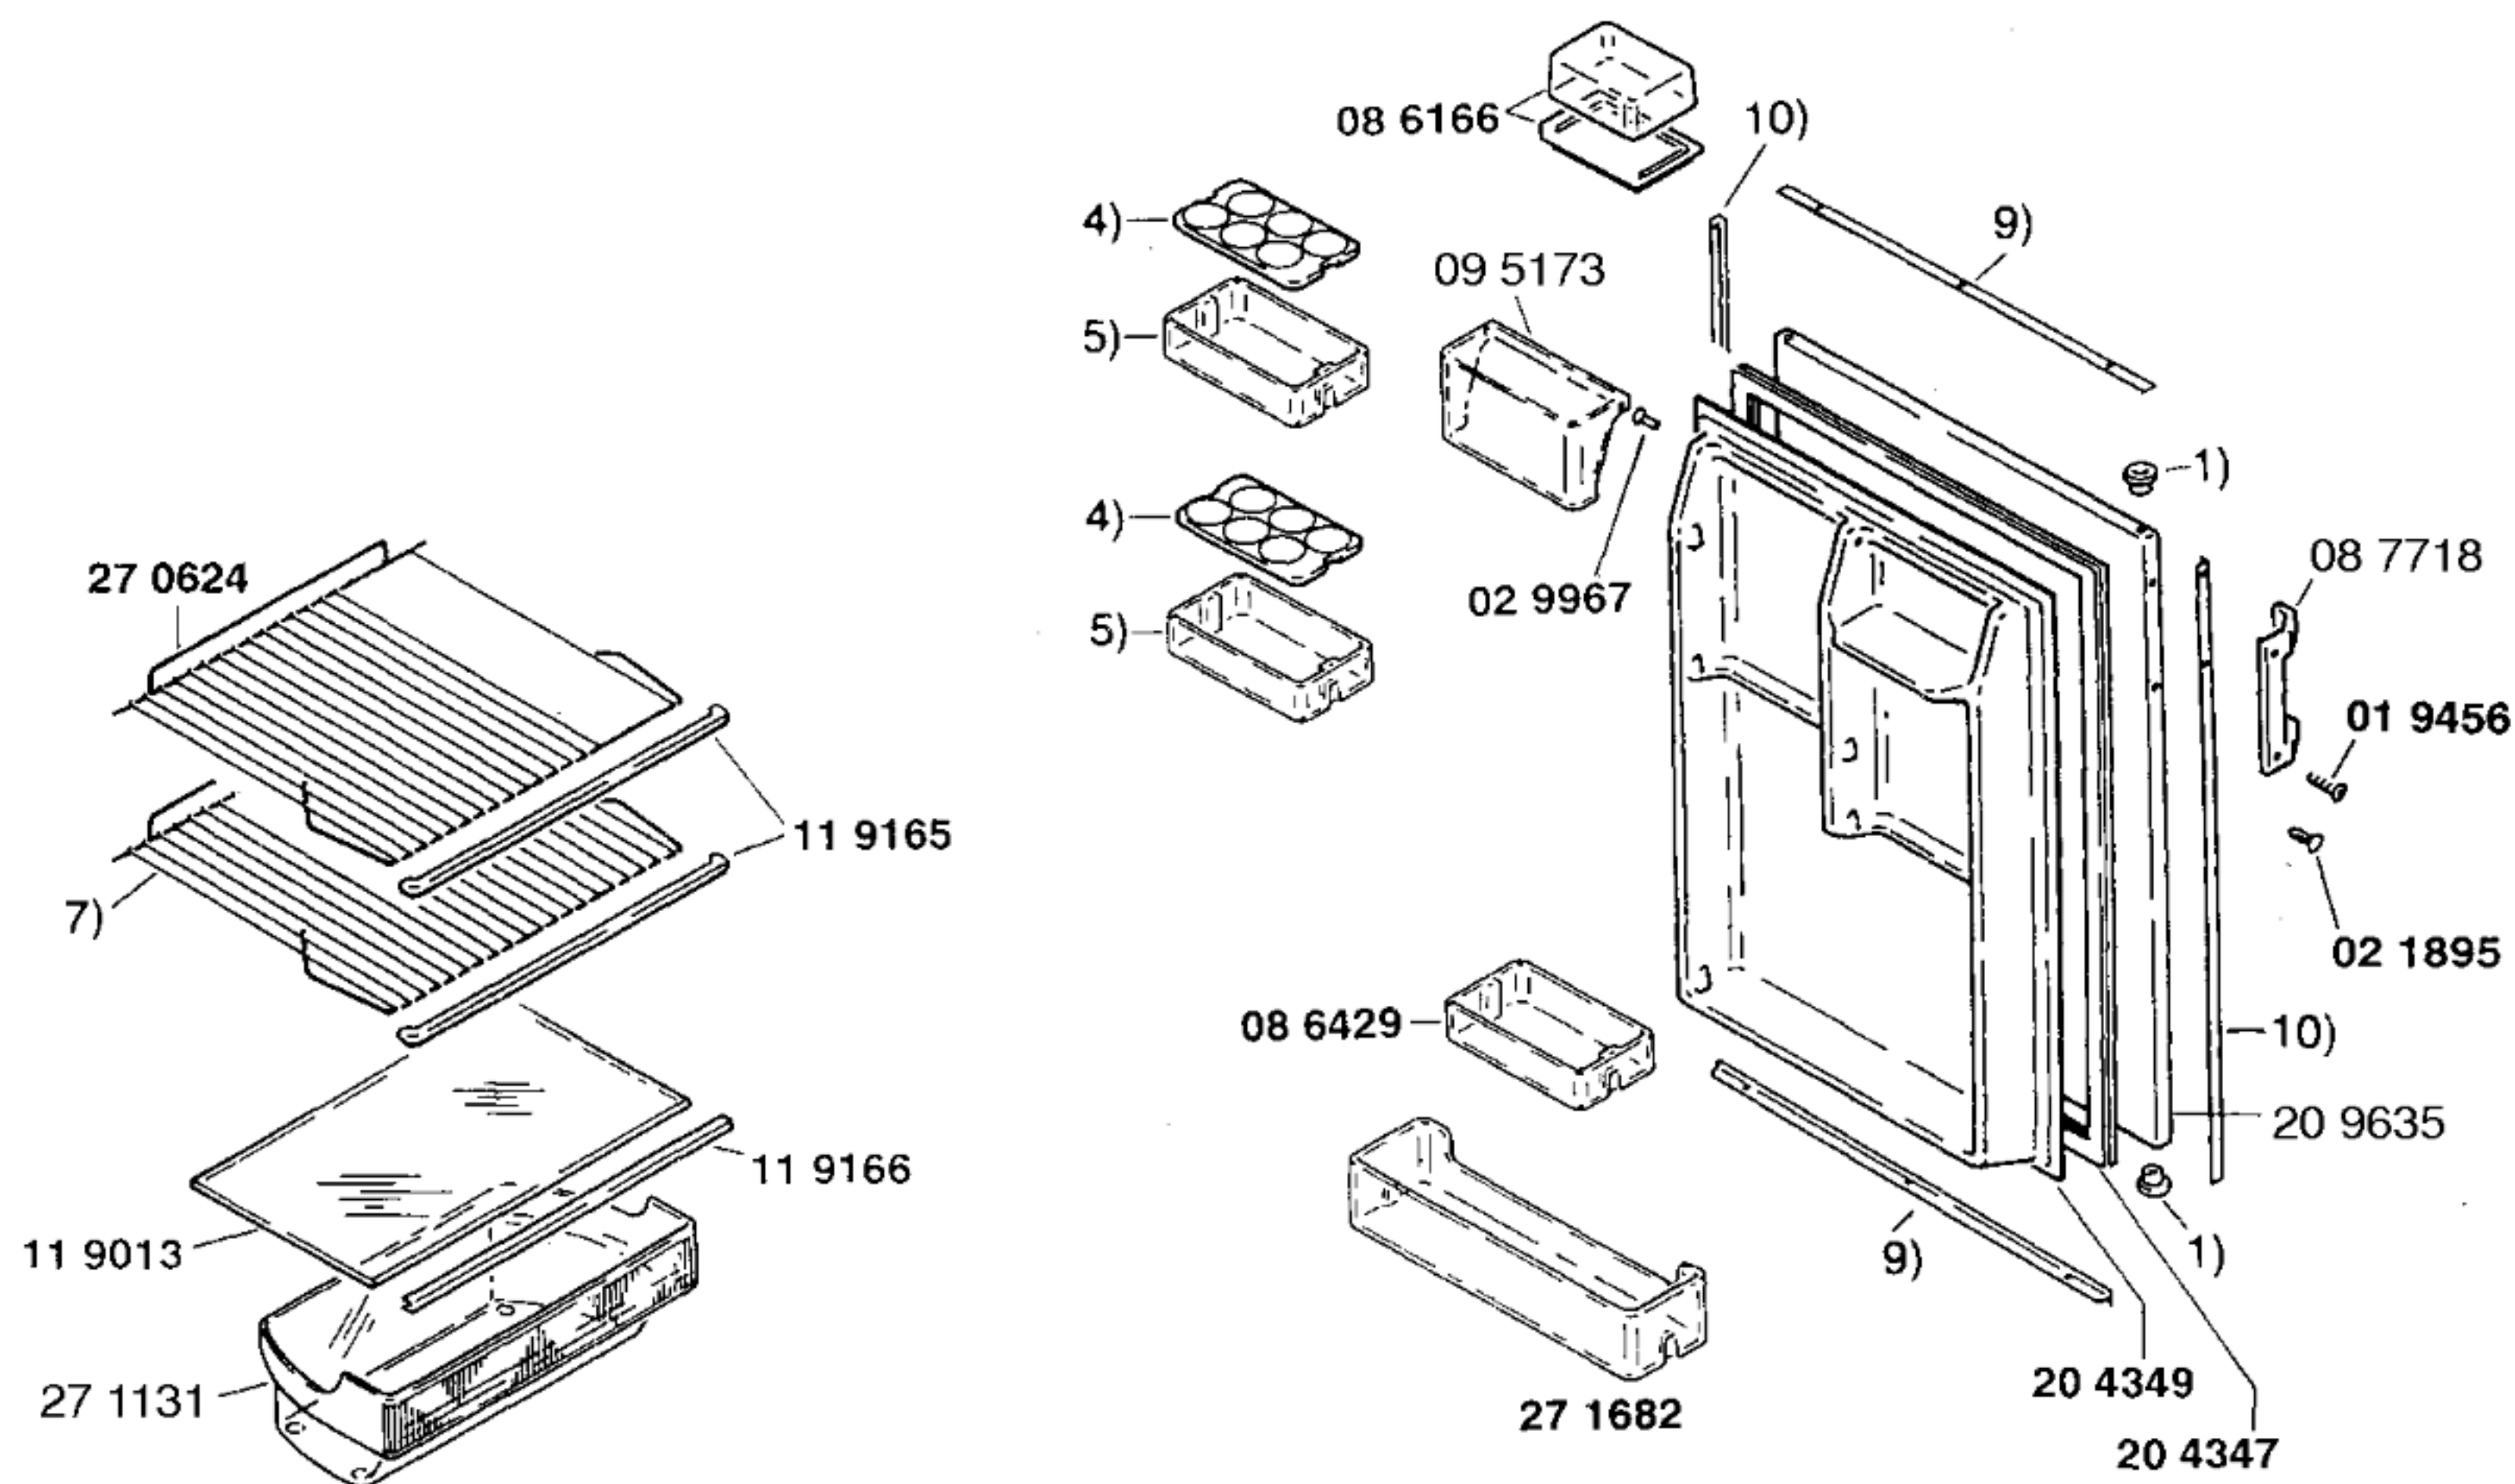

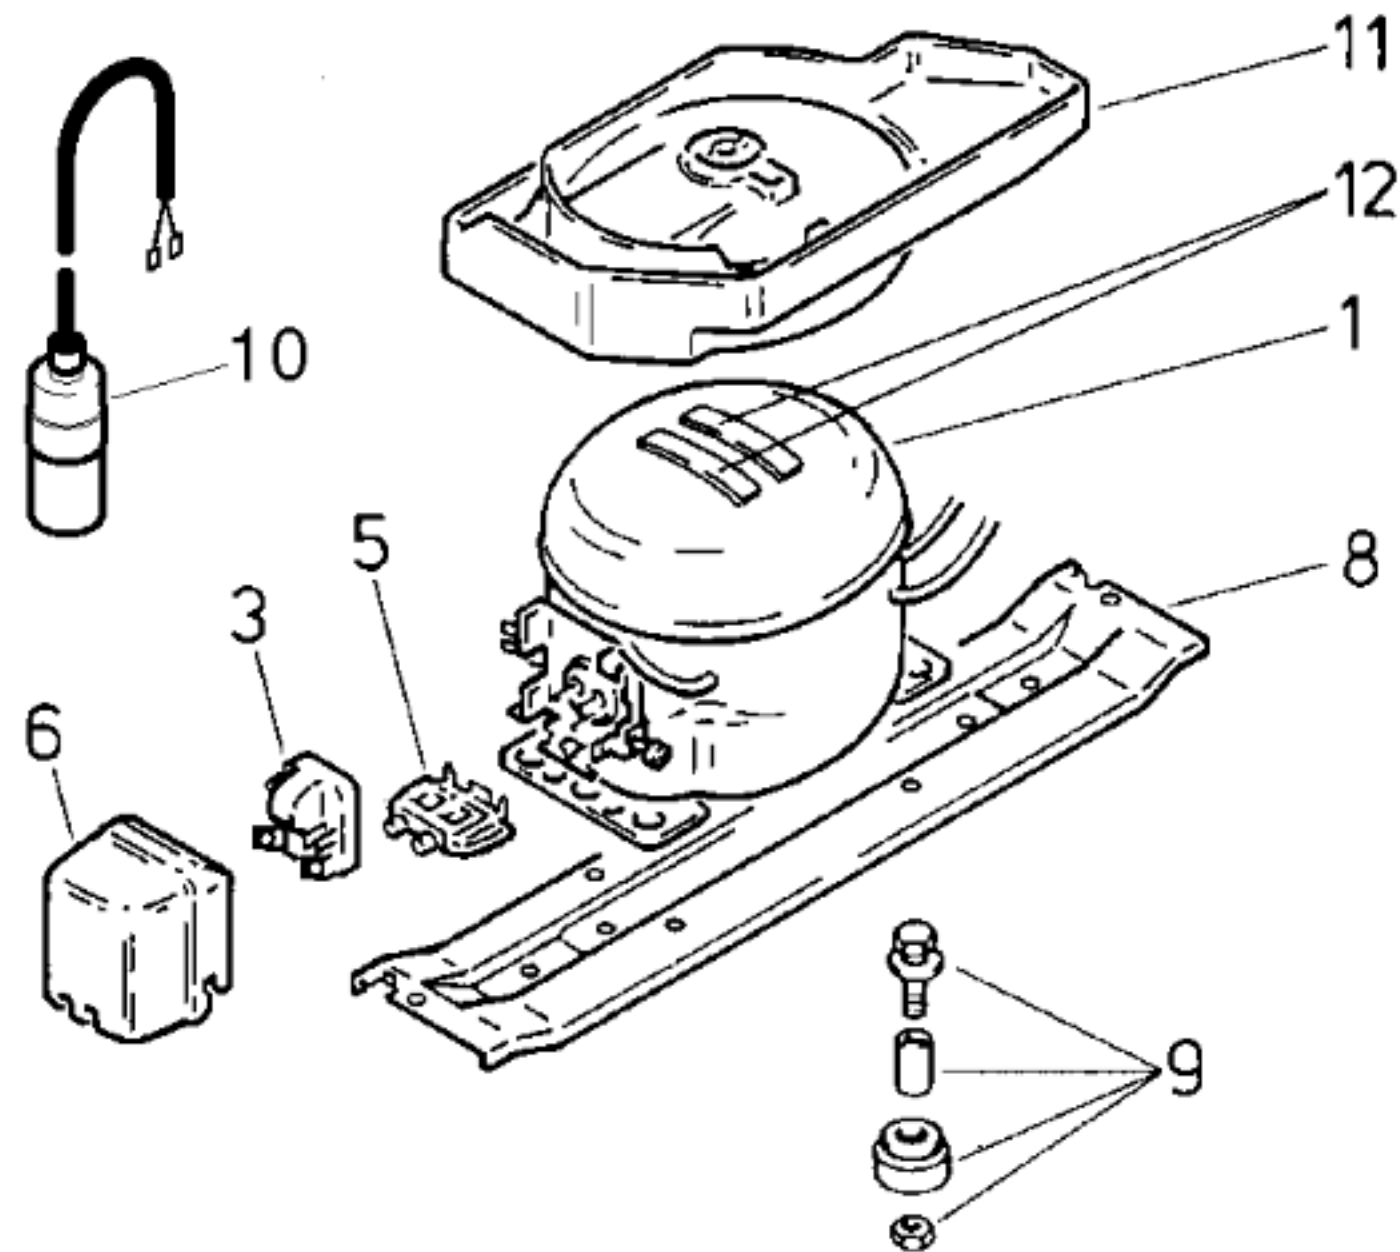

Pos.	V03		
	Danfoss	Zanussi	
	TL 5 F	GL45AA	
1	14 1119	14 1328	
2			
3	15 1055	15 3517	
4			
5	15 0760	15 3321	
6	15 1072	15 1072	
7			
8	27 0833	27 0833	
9	05 0166	05 0166	
10			
11		08 4744	
12		05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss	Zanussi	
Typ/Type		TL 5 F	GL45AA	
Förderleistung/Delivery/Débit		l/h	828	
Anlaufstrom/Starting current/Cour de démarrage		A	8,3	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	21,8	
		Hi/aux Ω	24,1	
Temp. Regler/Thermostat		Danfoss		
Typ/Type		090 B		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/		°C		
Valeurs de commutation		„ein“	–10,5	–1,5
		„aus“	–22,5	–10,5
		(„abtauen“ od.)	+8,0	+8,0
Füllmenge/Fill.quantity/Charge		R134a g	42	
Anschlußwert/Conn.load/Puiss. connectée		W	100	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		