




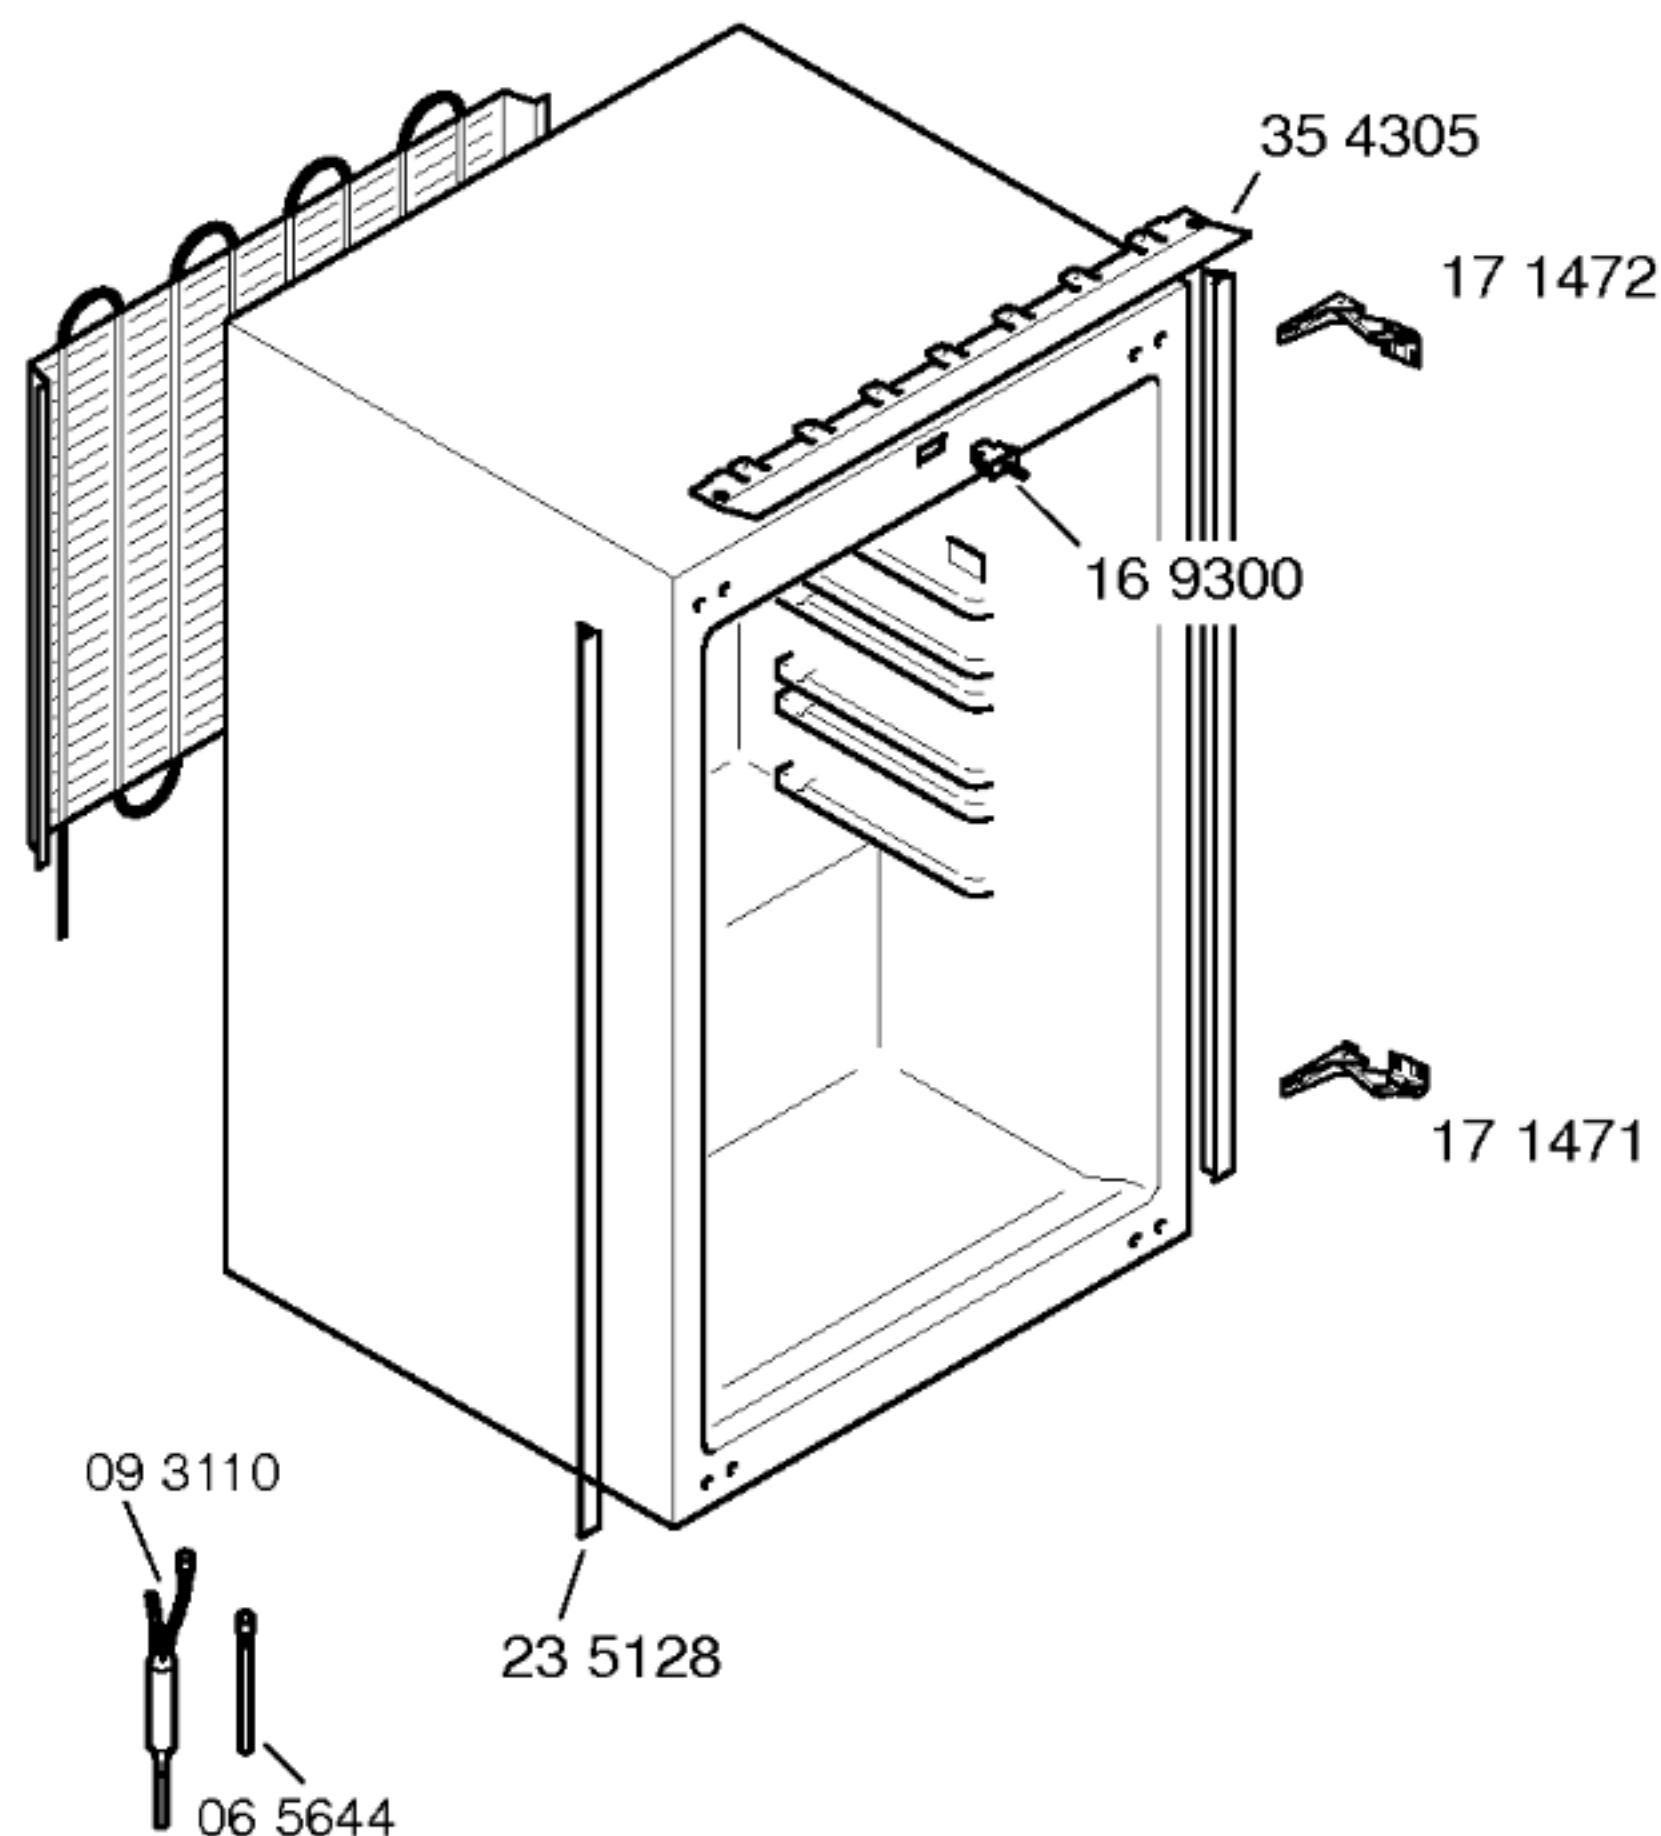

V01

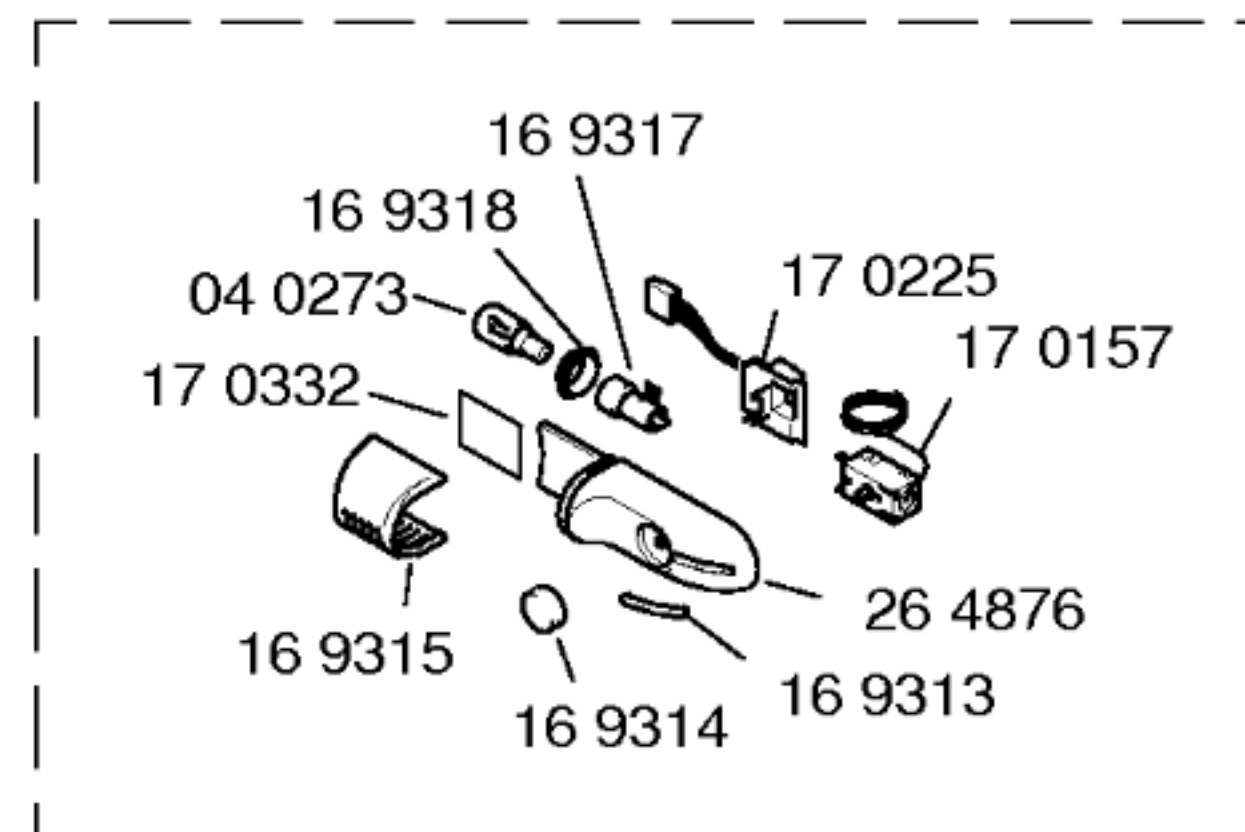




V02

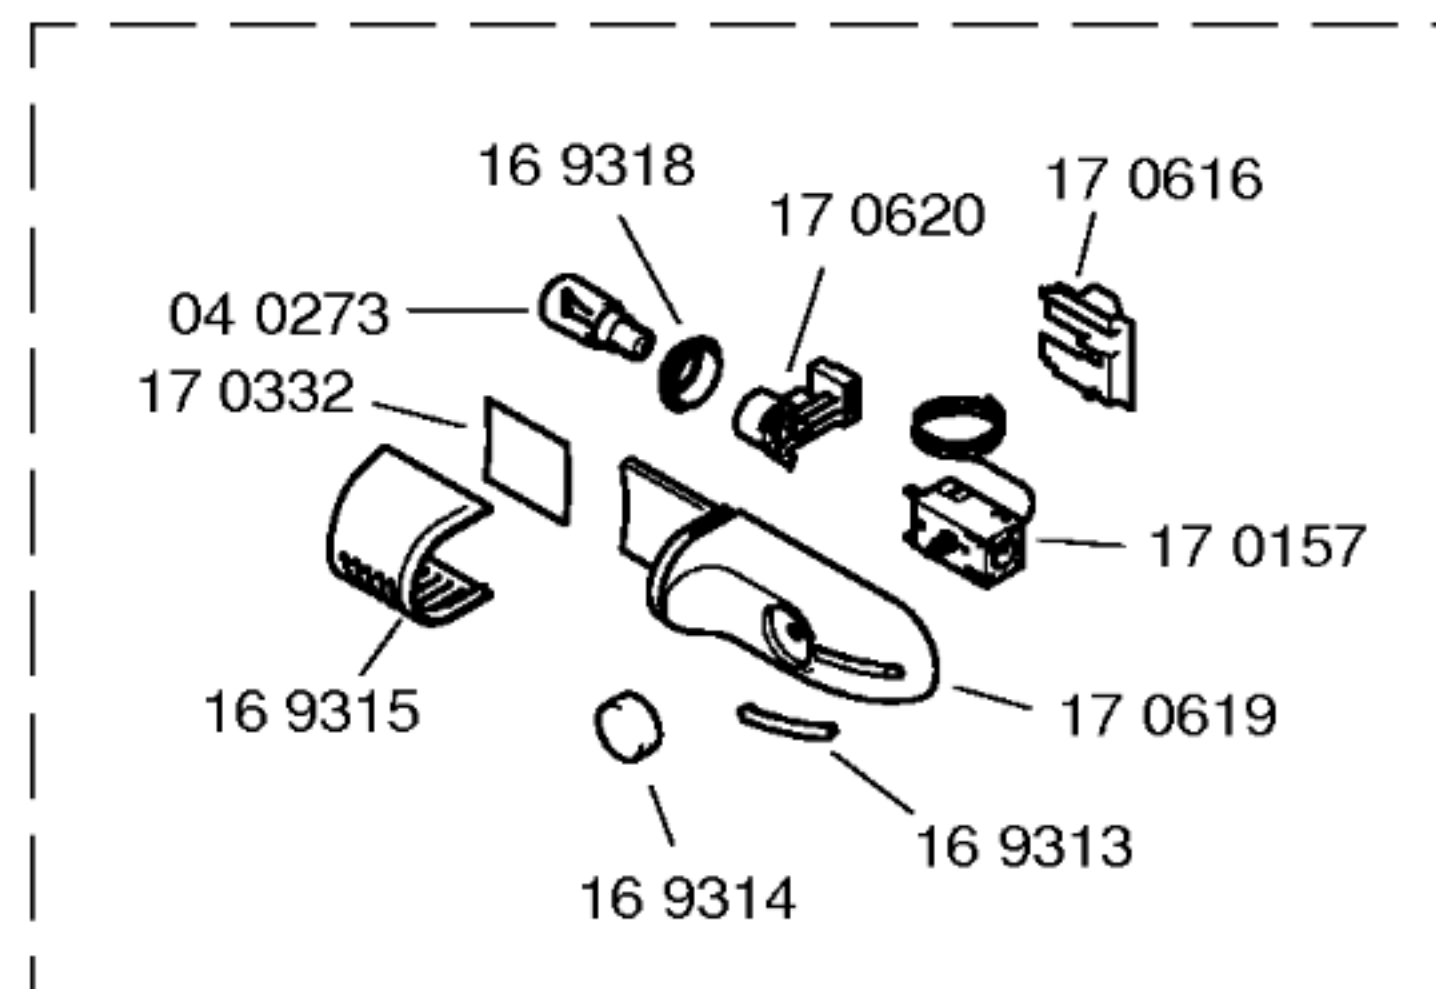

Gebrauchsanweisung
52 2495
(D,GB,F,I,NL)

Montageanleitung
52 3227
(D,GB,F,I,NL,DK,N,
SF,S,P)

Beistellsatz
26 6056

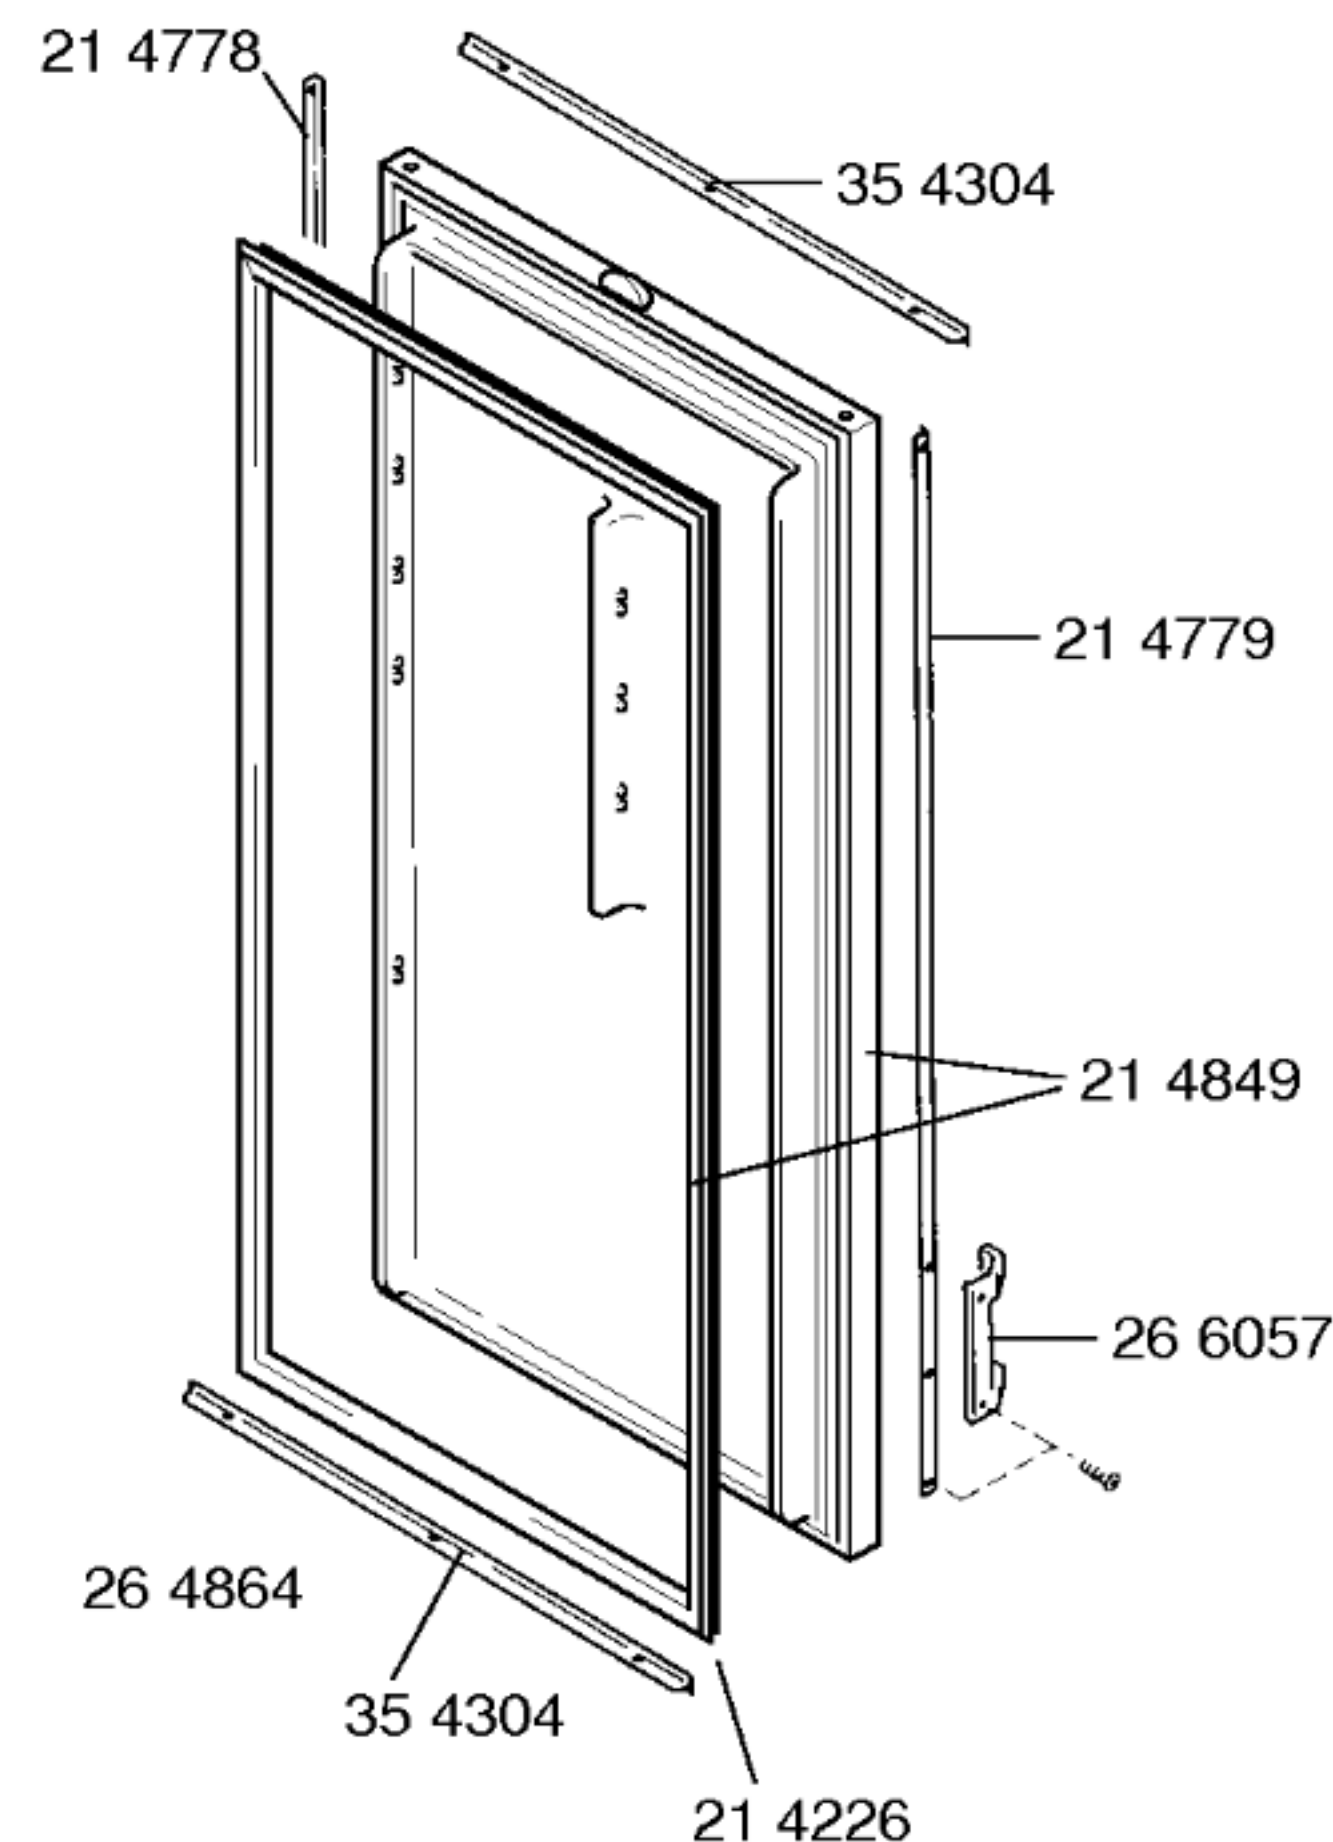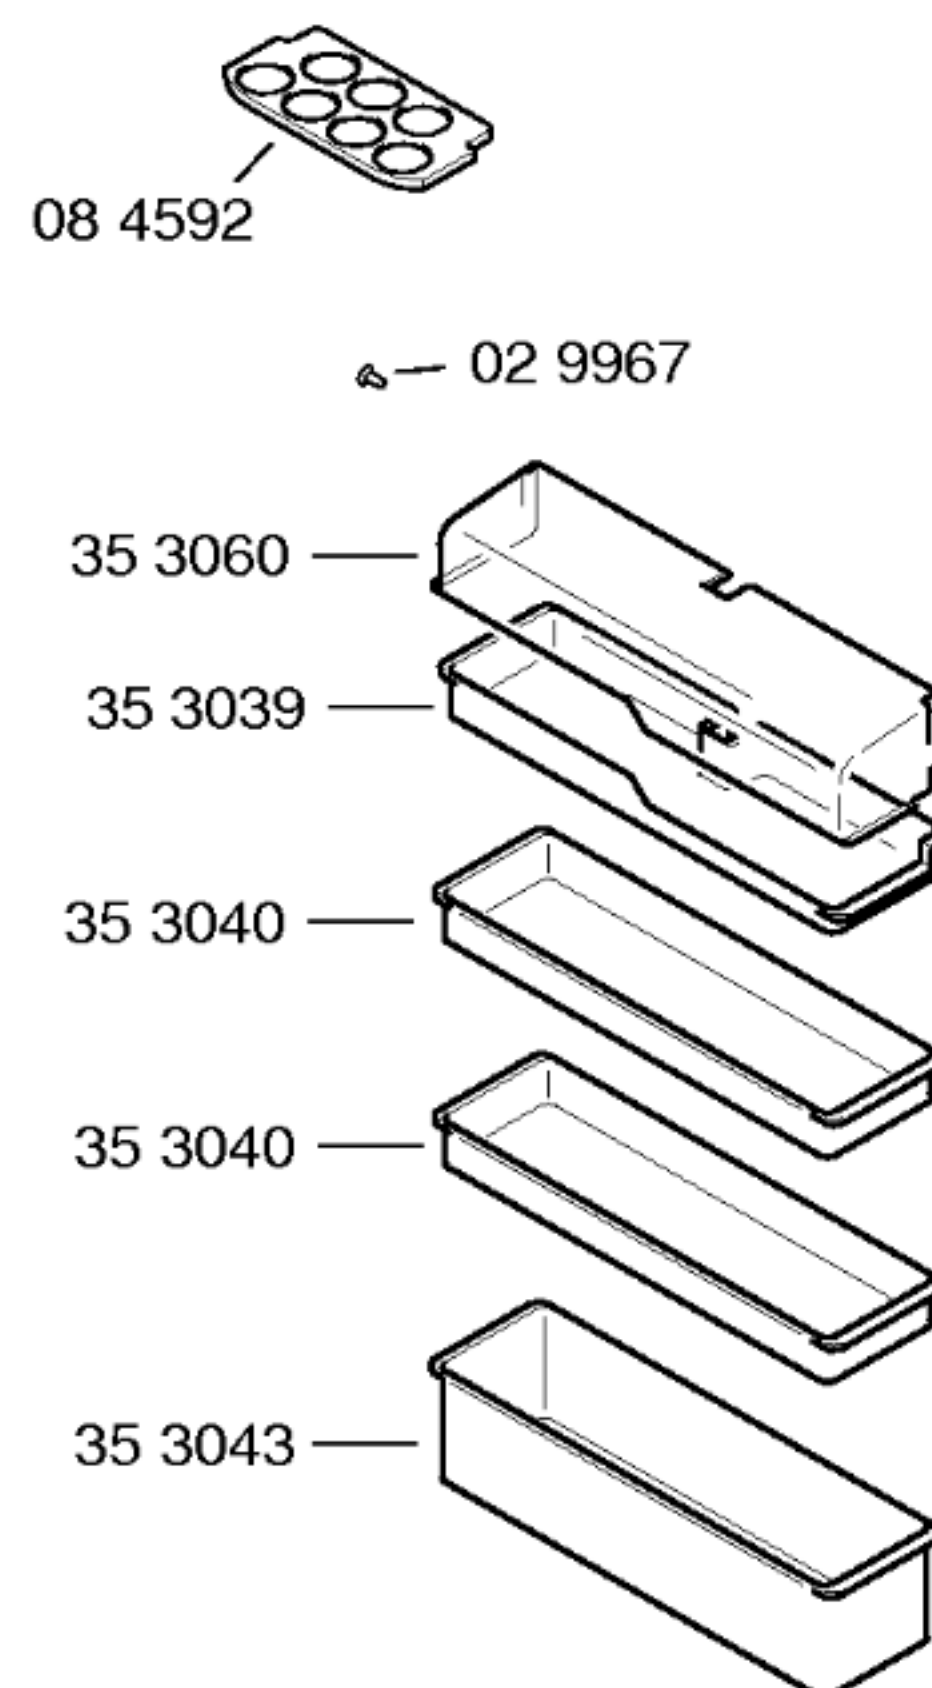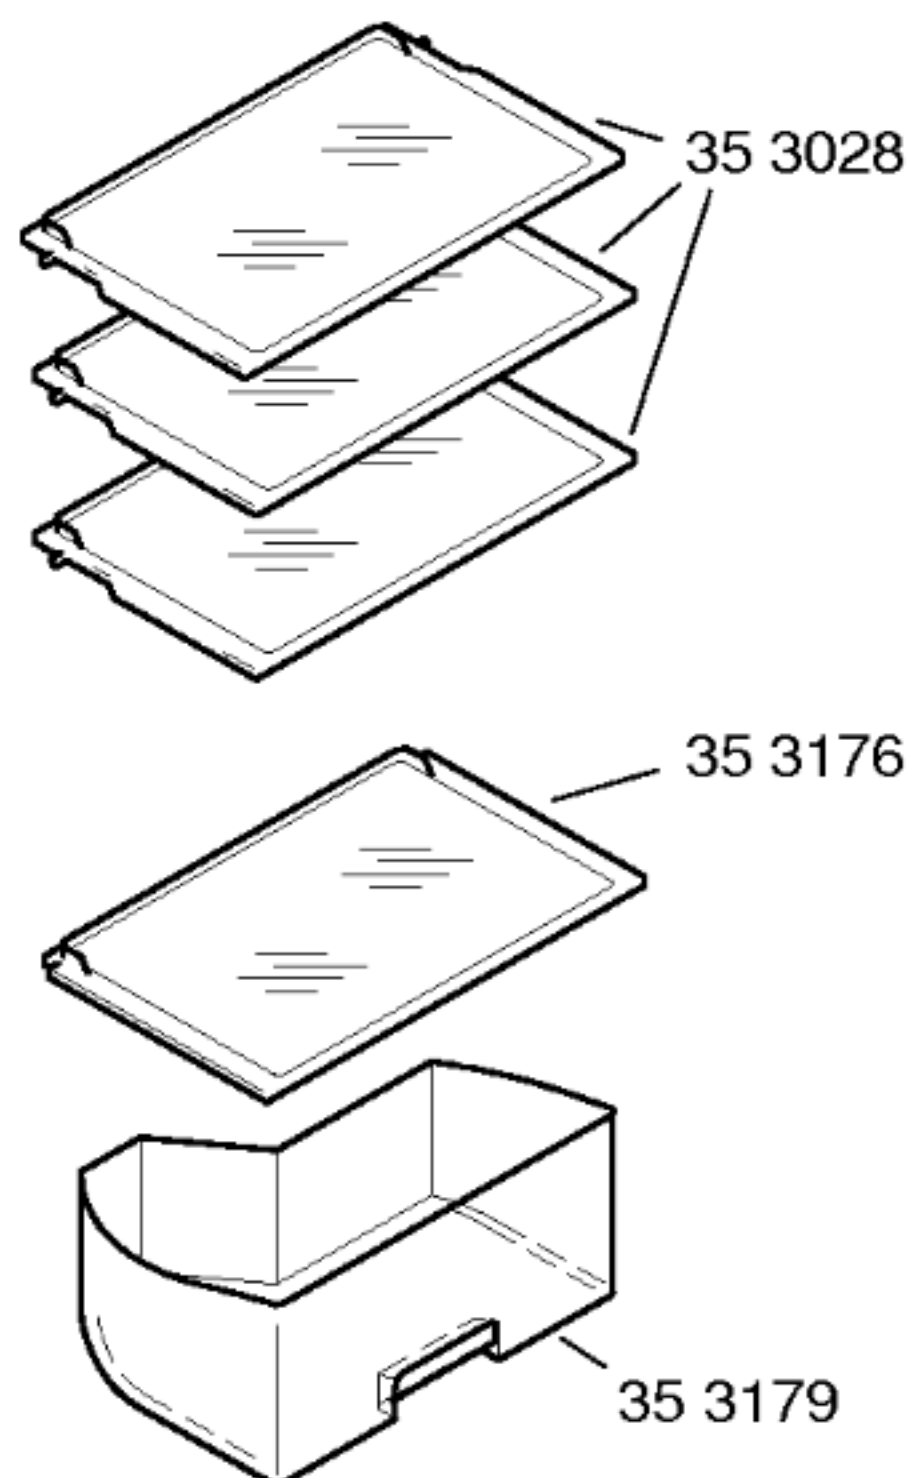

Ausgleichsblenden braun


KZ12880	37mm
KZ12890	41mm
KZ12800	57mm
ALU	
KZ12810	37mm
KZ12820	41mm
KZ12830	57mm

Dekorrahmen braun

KZ12460	880mm
weiß	
KZ12470	880mm

Torx-Schraube 3,5x16
für Dekorrahmen
17 3166

Türverkleidung
Edelstahl 880mm
KZ11232 Griff re.
KZ11233 Griff li.

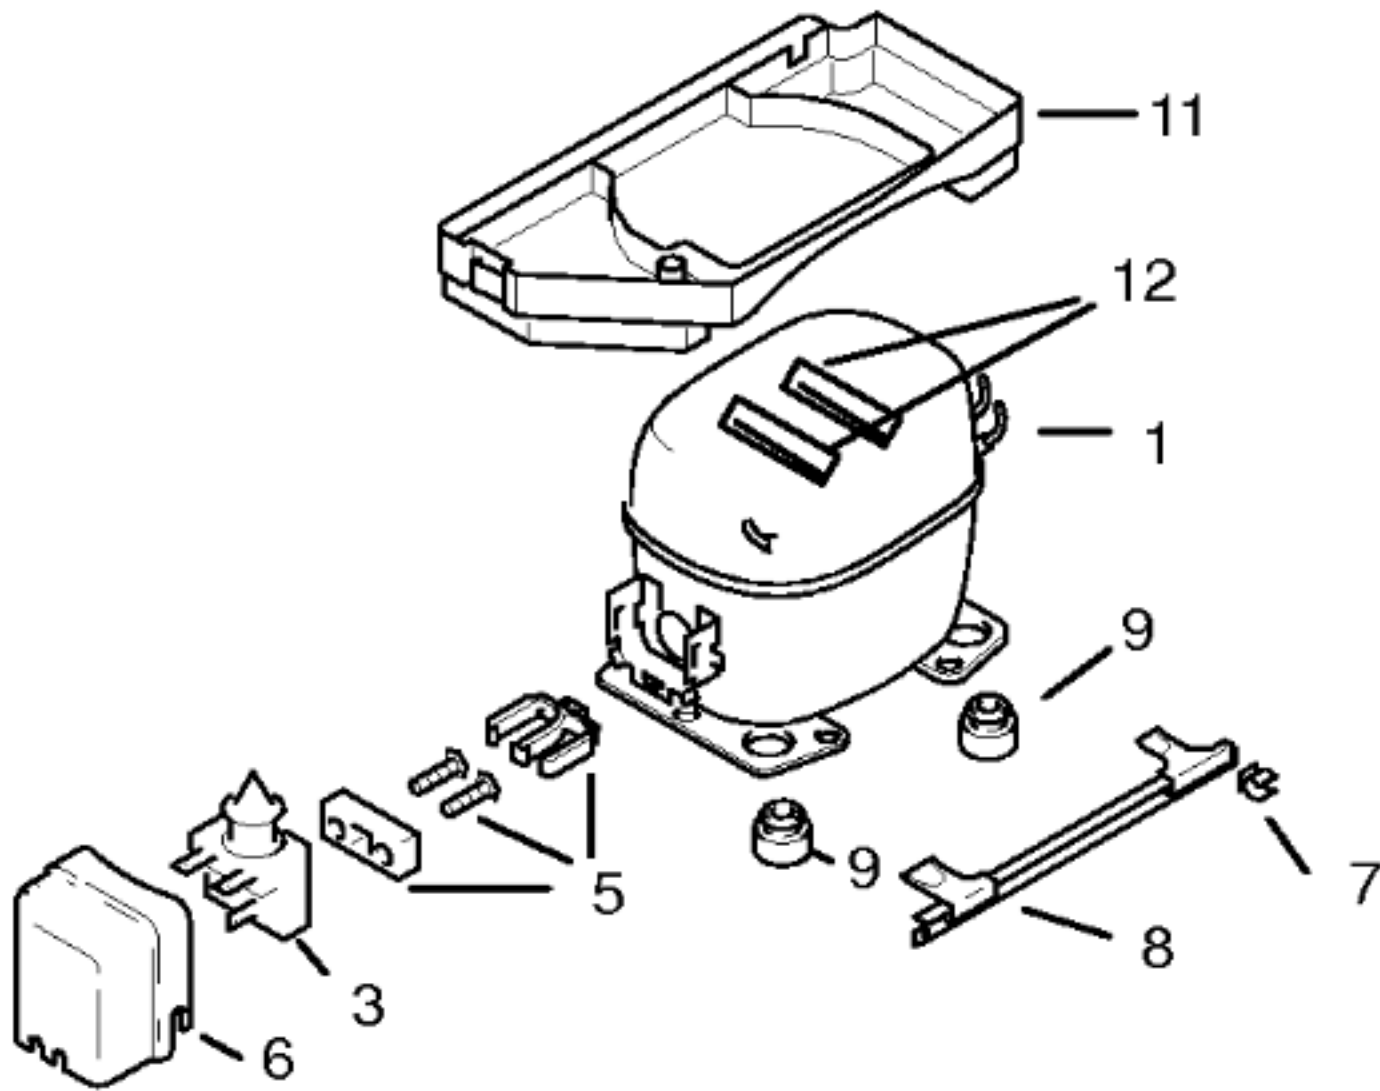

	V01	V02	
Pos.	Danfoss TLES4K	Aspera BPK1046Y	
1	14 1663	14 2099	
2			
3	15 1055	18 0752	
4			
5	15 0760	17 0882	
6	15 1072	17 0881	
7	16 9319	16 9319	
8	26 4879	26 4879	
9	050166	050166	
10			
11	26 4878	35 4549	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		Aspera
Typ/Type		TLES 4 K		BPK1046Y
Förderleistung/Delivery/Débit		l/h	695	612
Anlaufstrom/Starting current/Cour de démarrage		A	6,9	3,2
Widerstand/Resistance/Résistance		Ha/main/prin	Ω	29,0
		Hi/aux	Ω	19,0
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K59		
Regelstellung/Position		kalt		warm
Schaltwerte/Switching values		"warm"	+5,0	+5,0
Valeurs de commutation		"kalt"	-25,0	-10,0
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	50	44
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Temp.-Regler/Thermostat				
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild