

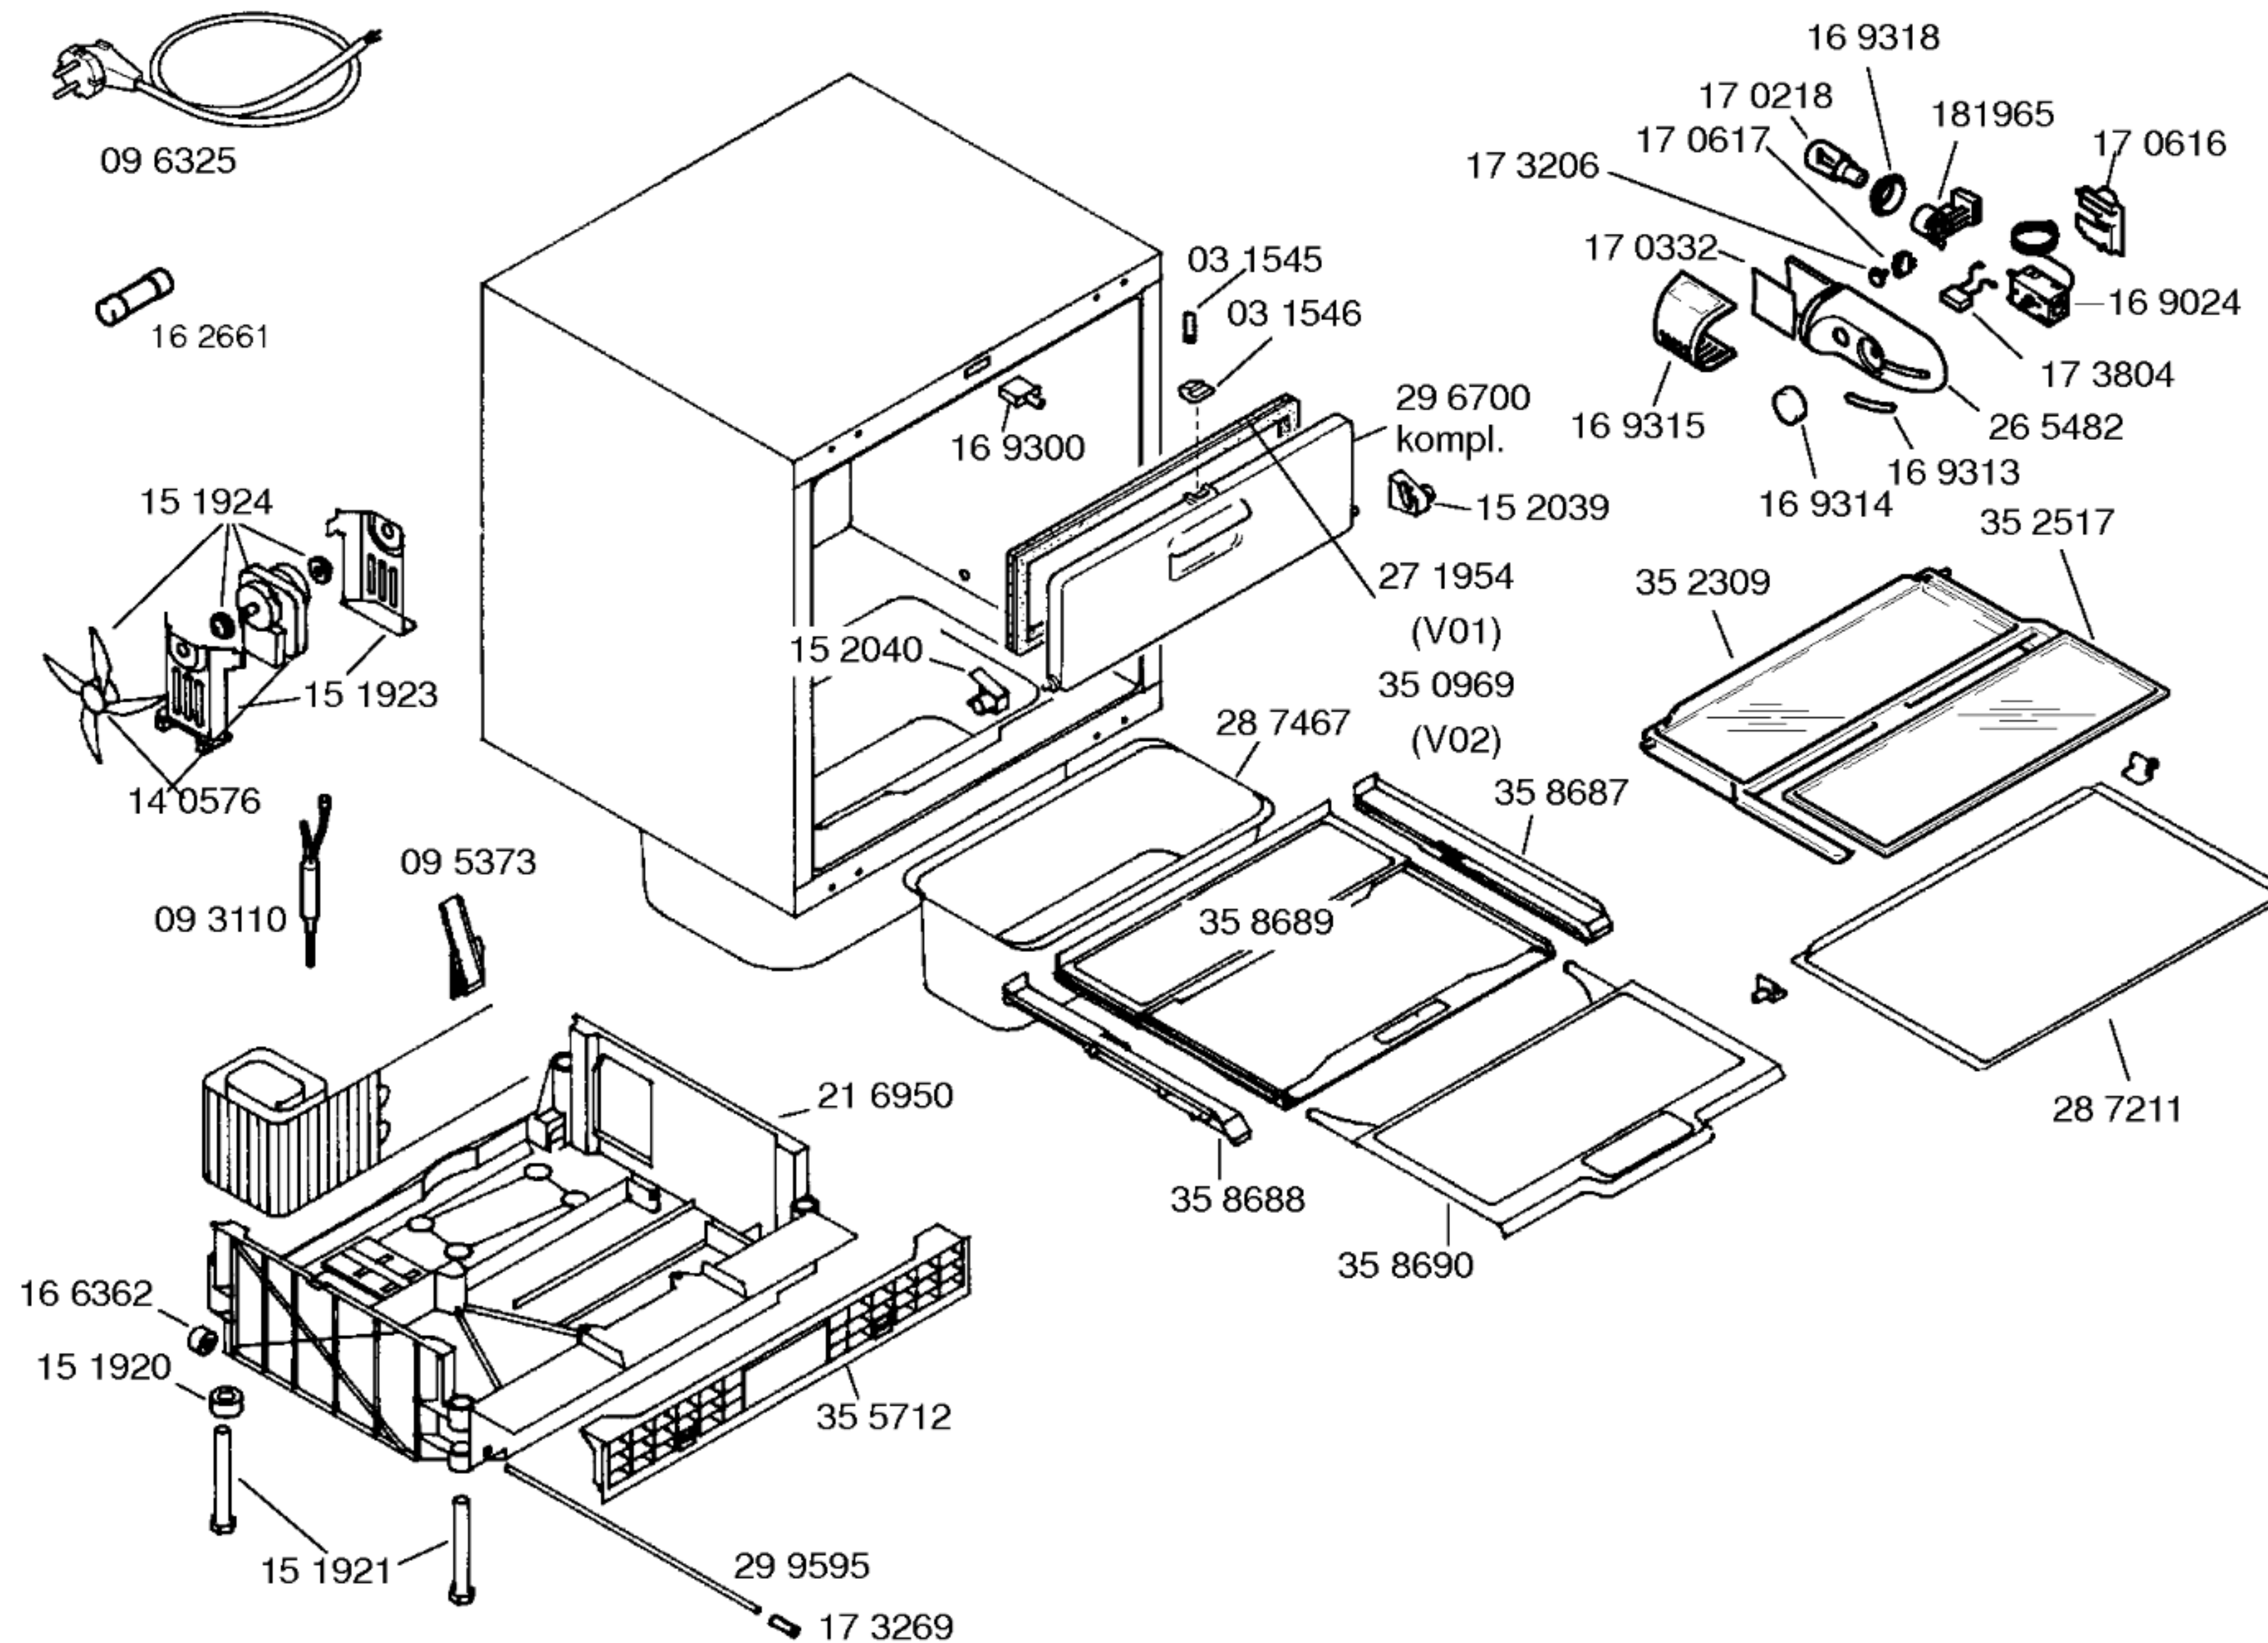


Gebrauchs-/Aufstellanl.
52 8071Beistellsatz
26 8429

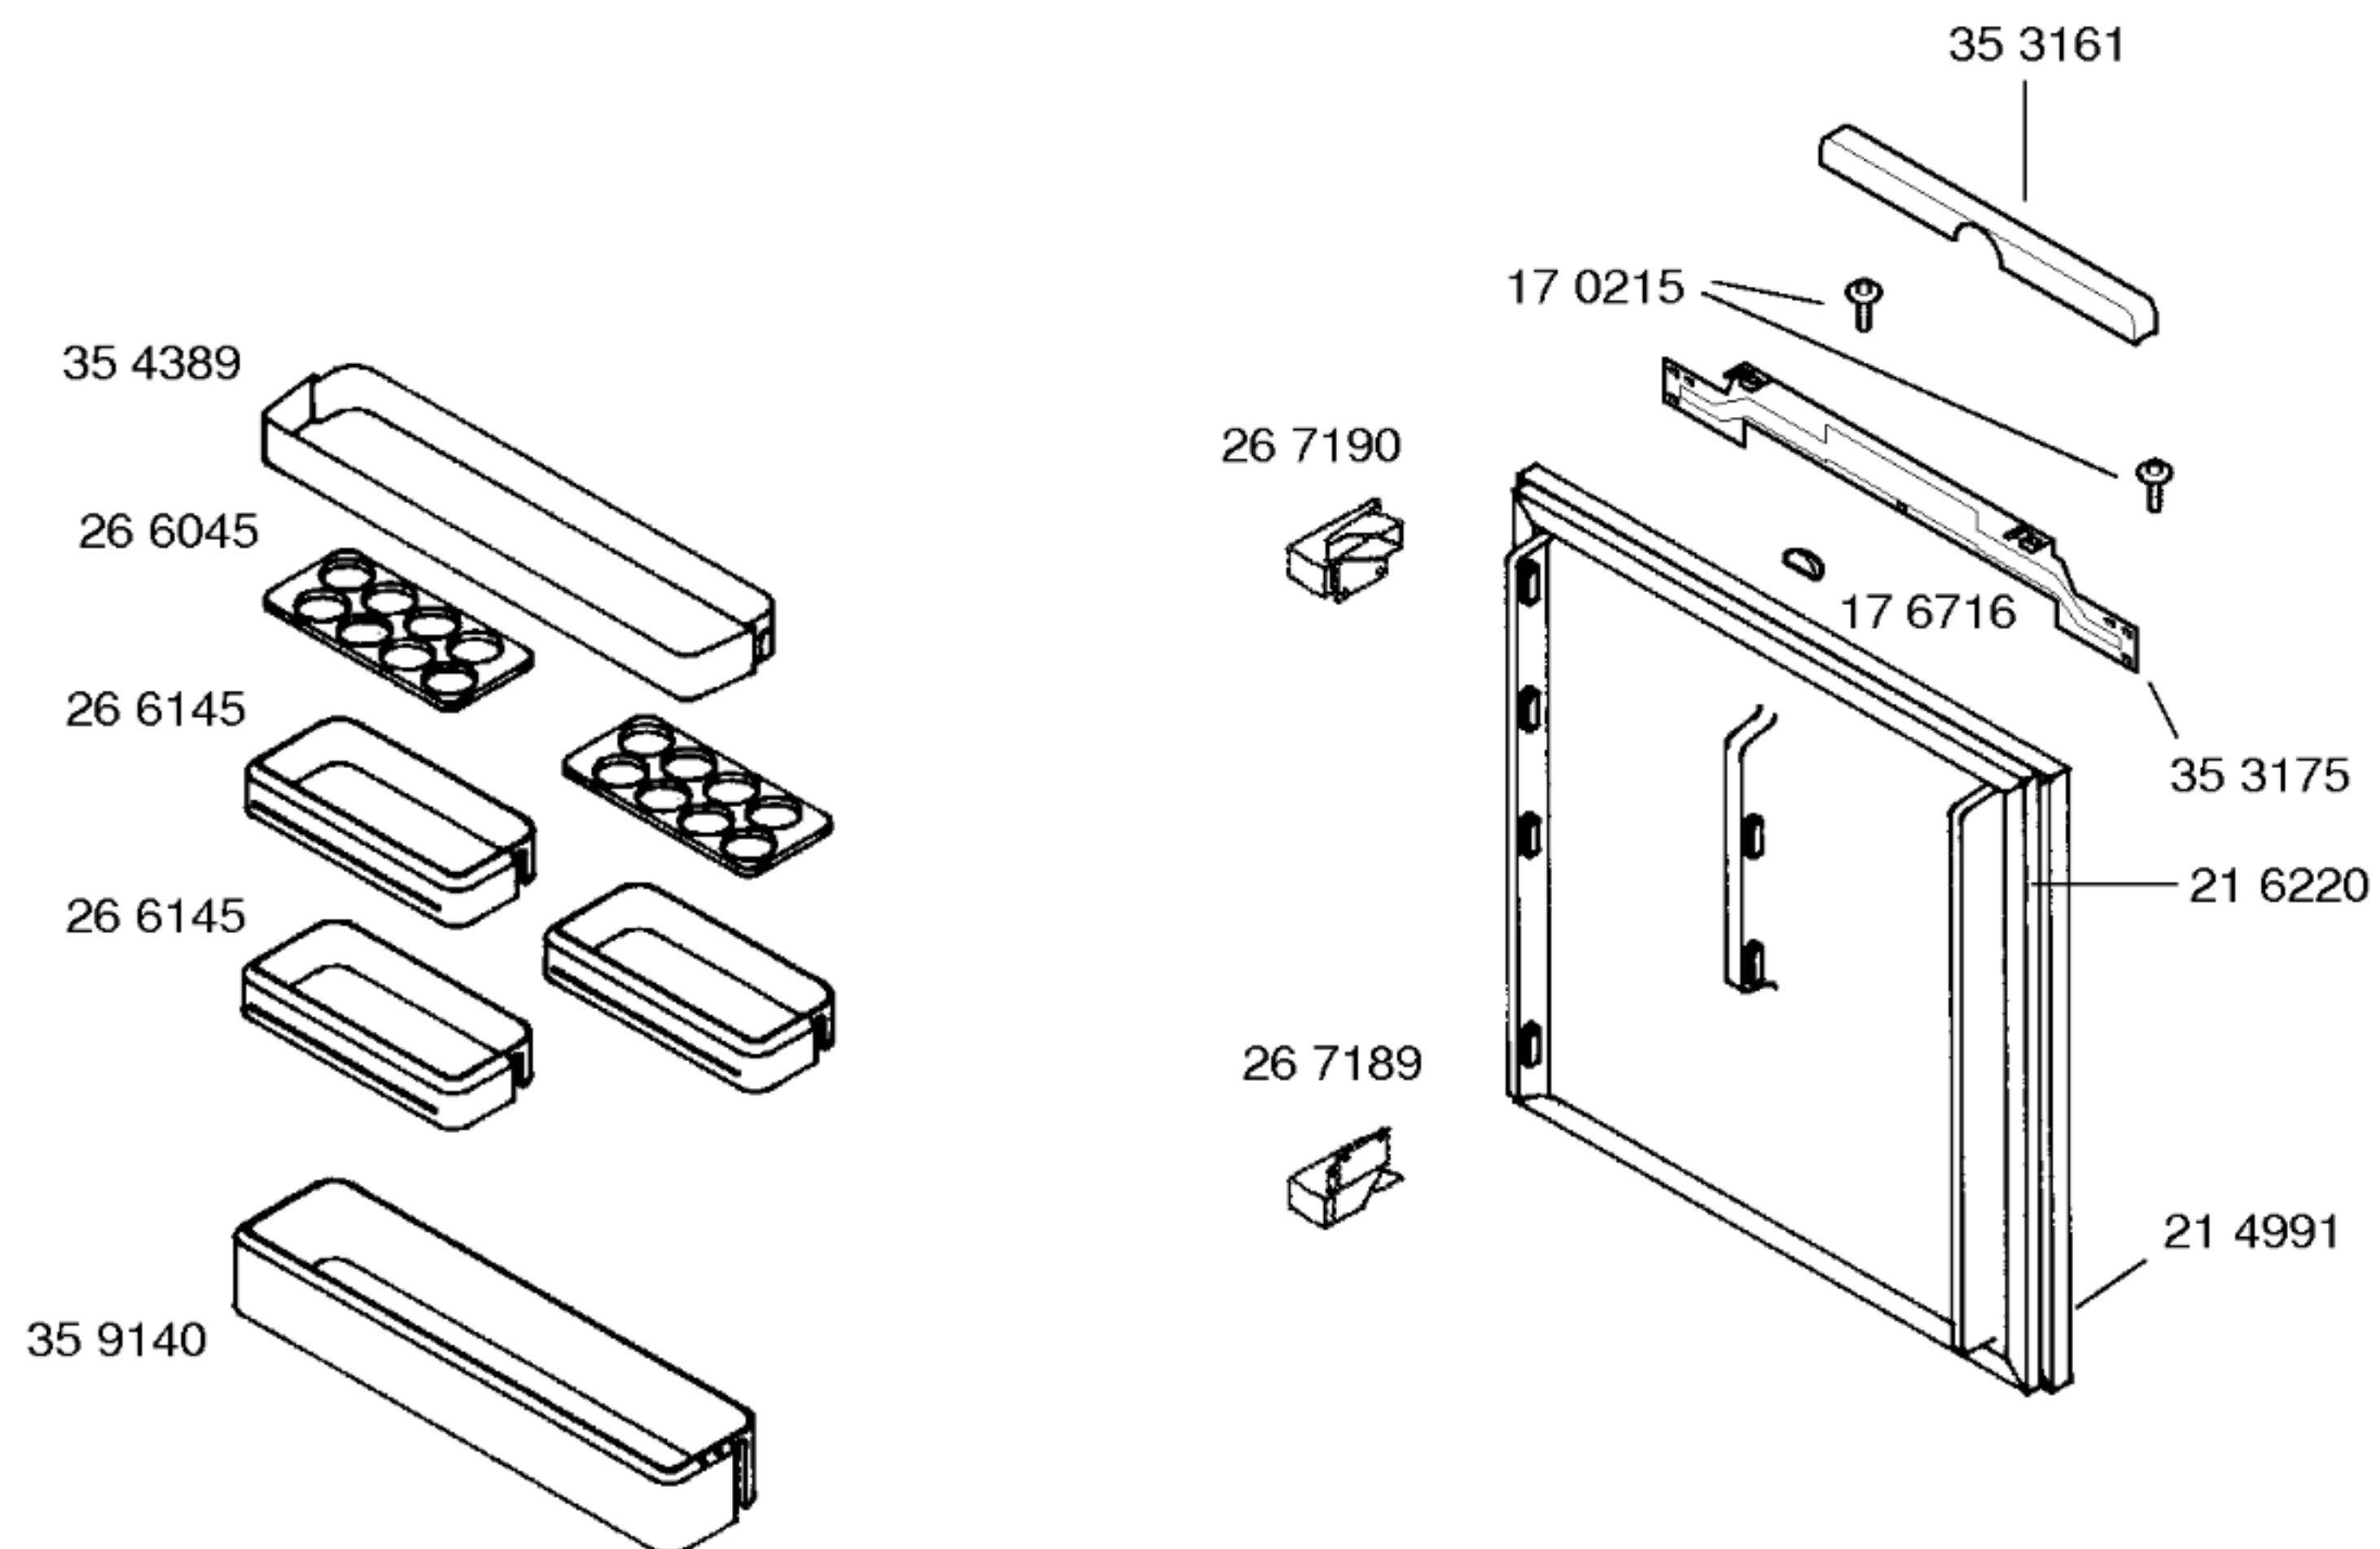

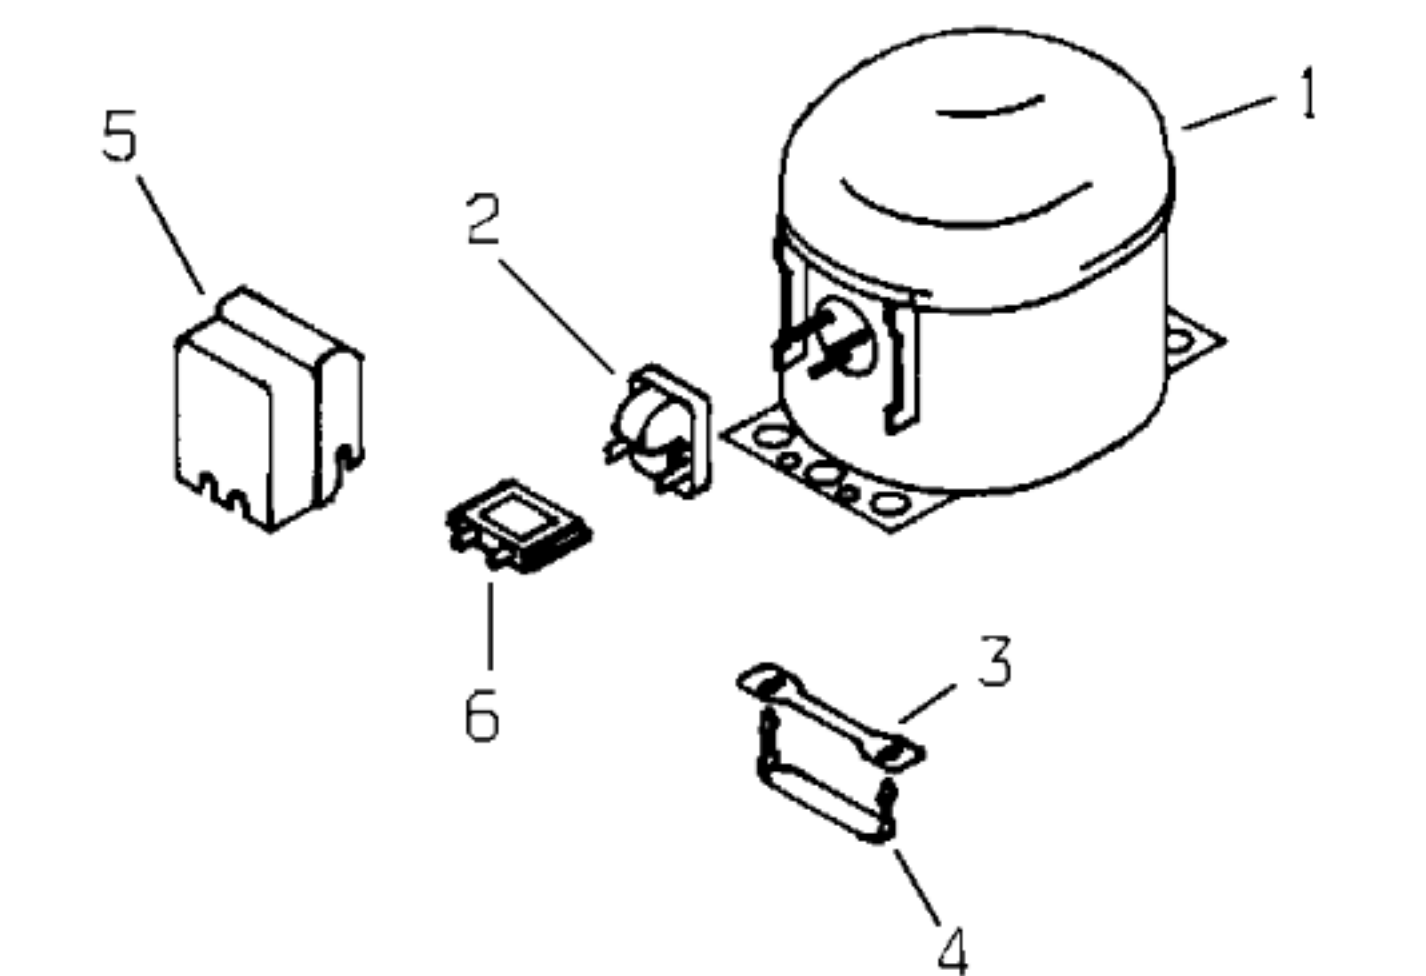

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	Goldstar
Typ/Type		TLS 7 KK2	ND69NAEM
Förderleistung/Delivery/Débit	l/h	1168	1242
Anlaufstrom/Starting current/Cour de démarrage	A	8,8	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	18,9
	Hi/aux	Ω	15,3
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K59	
Reglerstellung/Position		kalt	warm
Schaltwerte/Switching values/	„ein“	+5	+5
Valeurs de commutation	„aus“	-28	-17
(„abtauen“ od.)	„alarm“		
Füllmenge/Fill.quantity/Charge	600a	g	
Anschlußwert/Conn.load/Puiss. connectée	W	75	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur		MES F61-10	
Widerstand/Resistance/Résistance	Ω	680	
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

	V01	V02	
Pos.	Danfoss	Goldstar	
	TLES 7 KK2	ND69NAEM	
1	14 1903	14 1999	
2	15 1055	17 0743	
3	15 1919	15 1919	
4	15 1918	15 1918	
5	15 1072	17 0744	
6	15 0760	17 0746	
7			
8			
9			
10			
11			
12			