



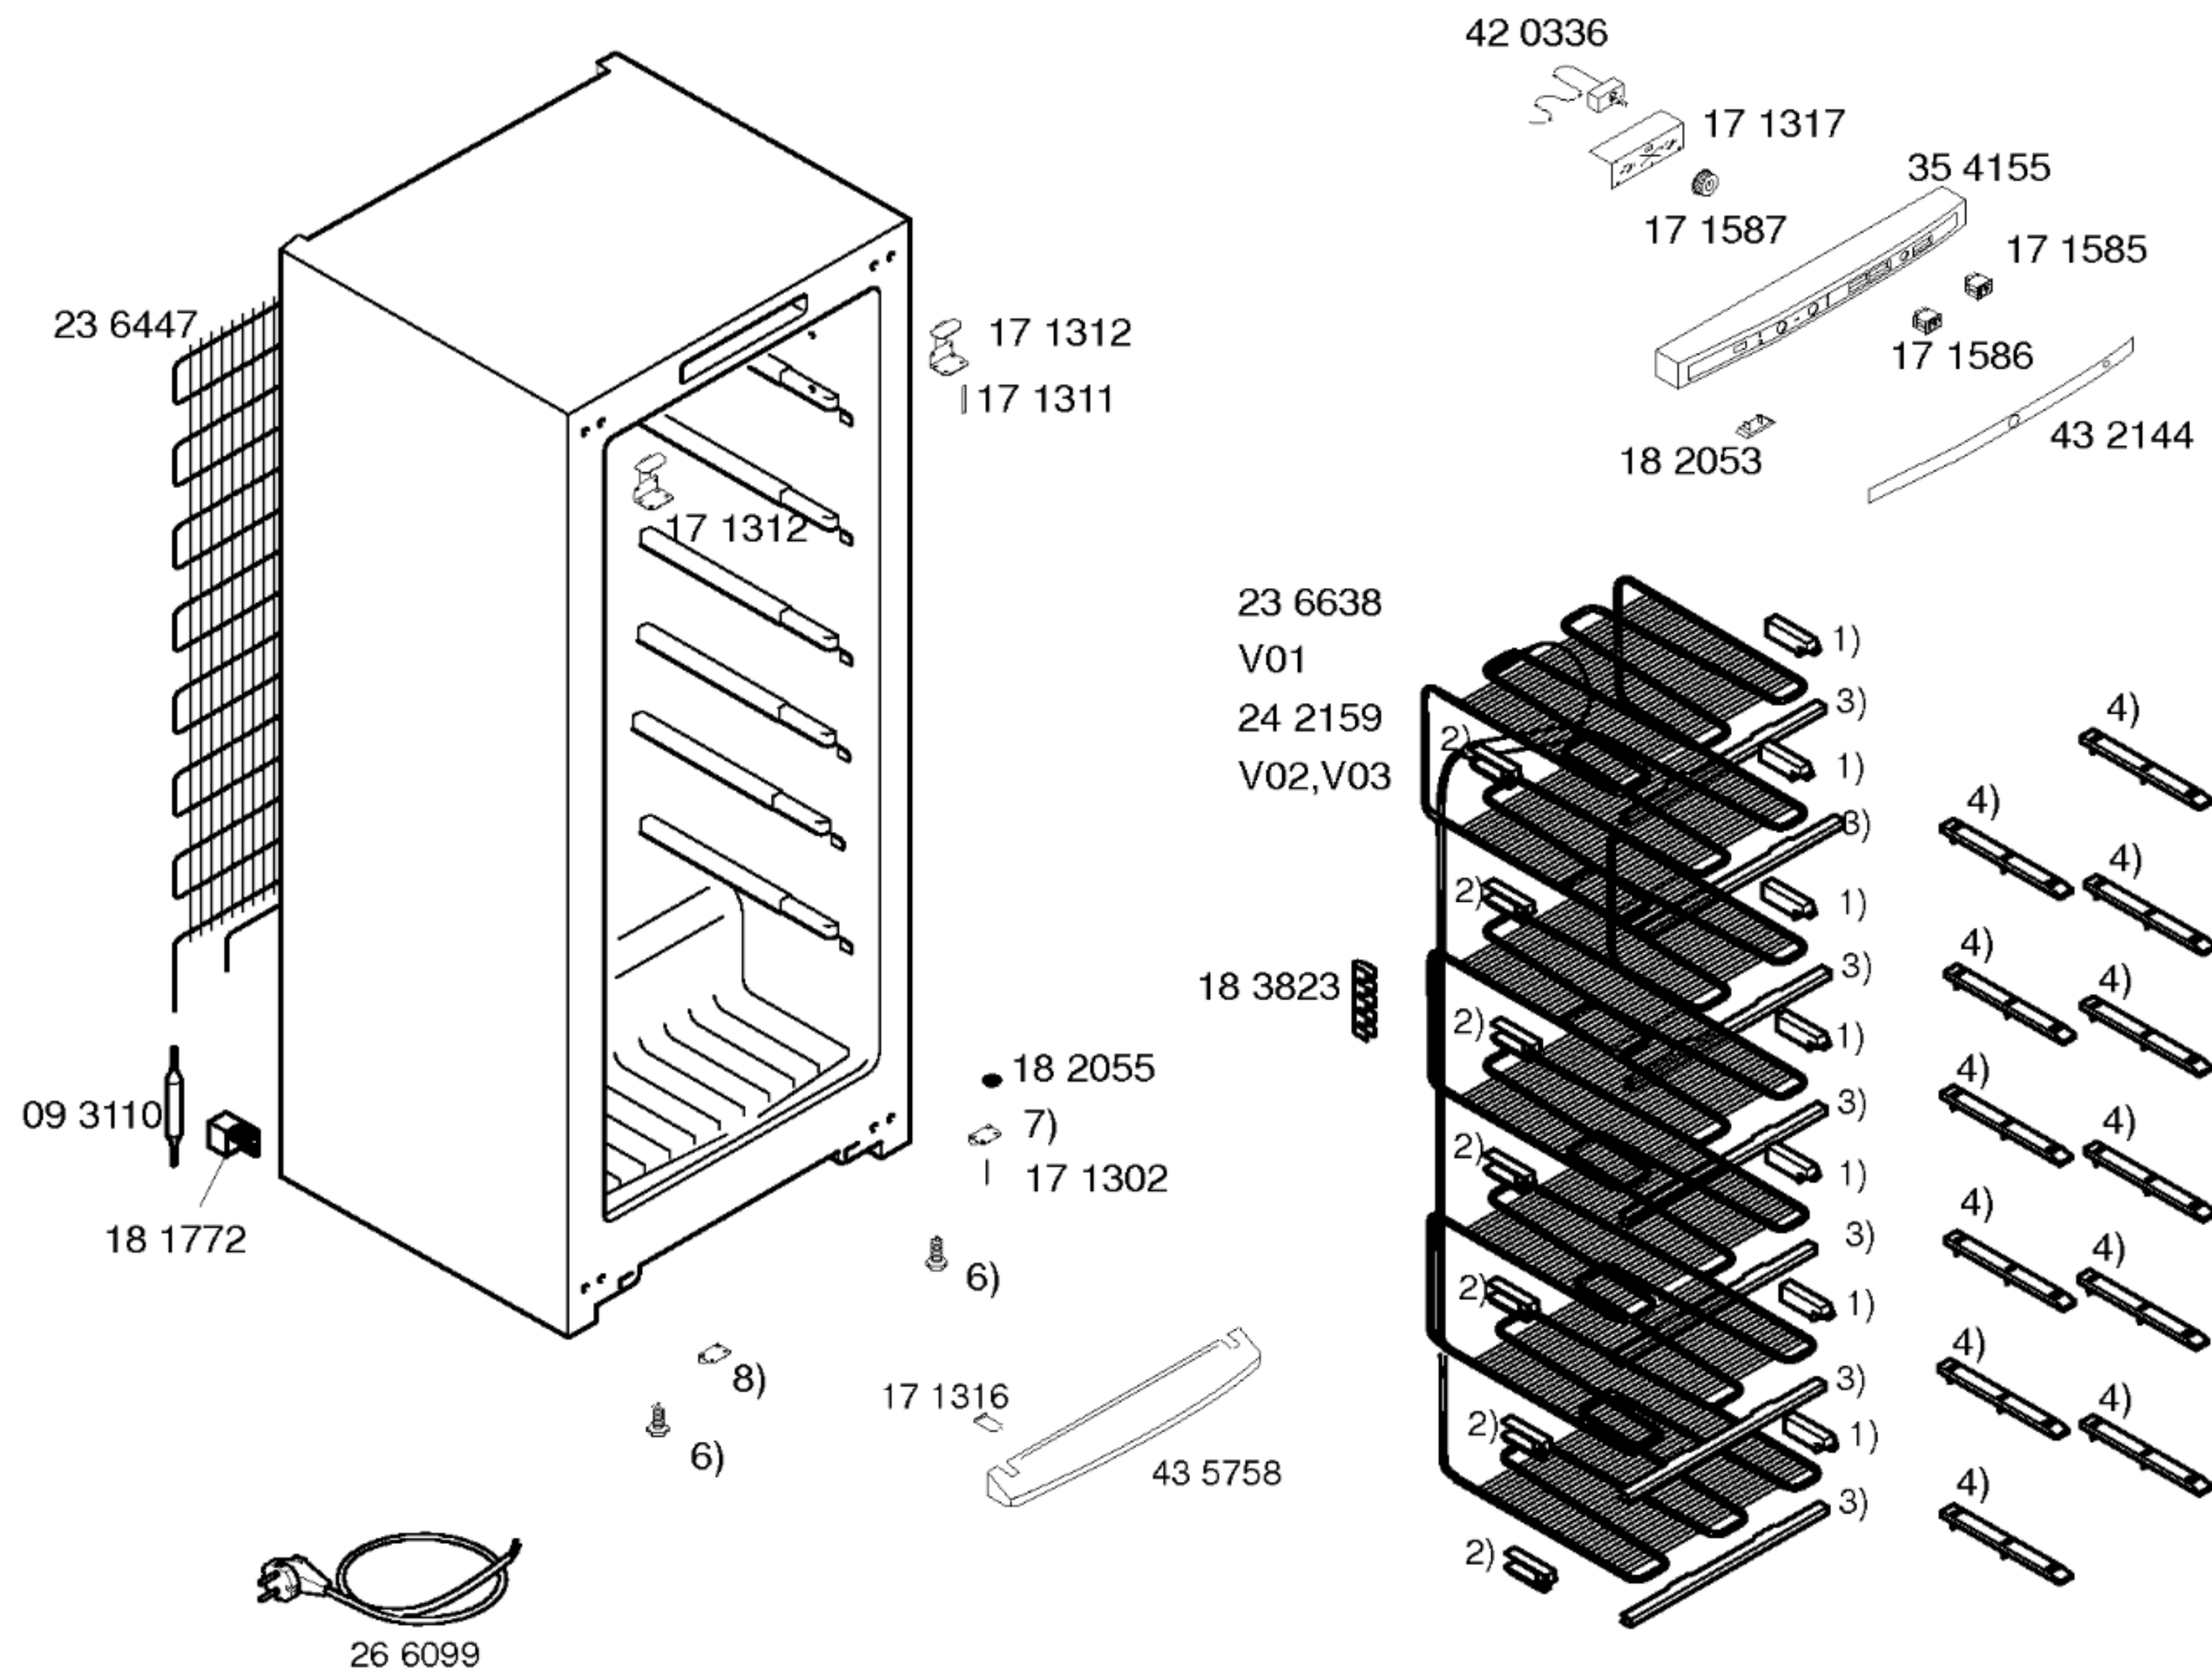


Gebrauchsanweisung
58 9926

Side by Side
Beistellsatz zu KSR
23 6590

- 1) 18 3821
- 2) 18 3822
- 3) 36 2472
- 4) 36 7363
- 5) 43 2144
- 6) 42 1516
- 7) 42 1601
- 8) 42 1602

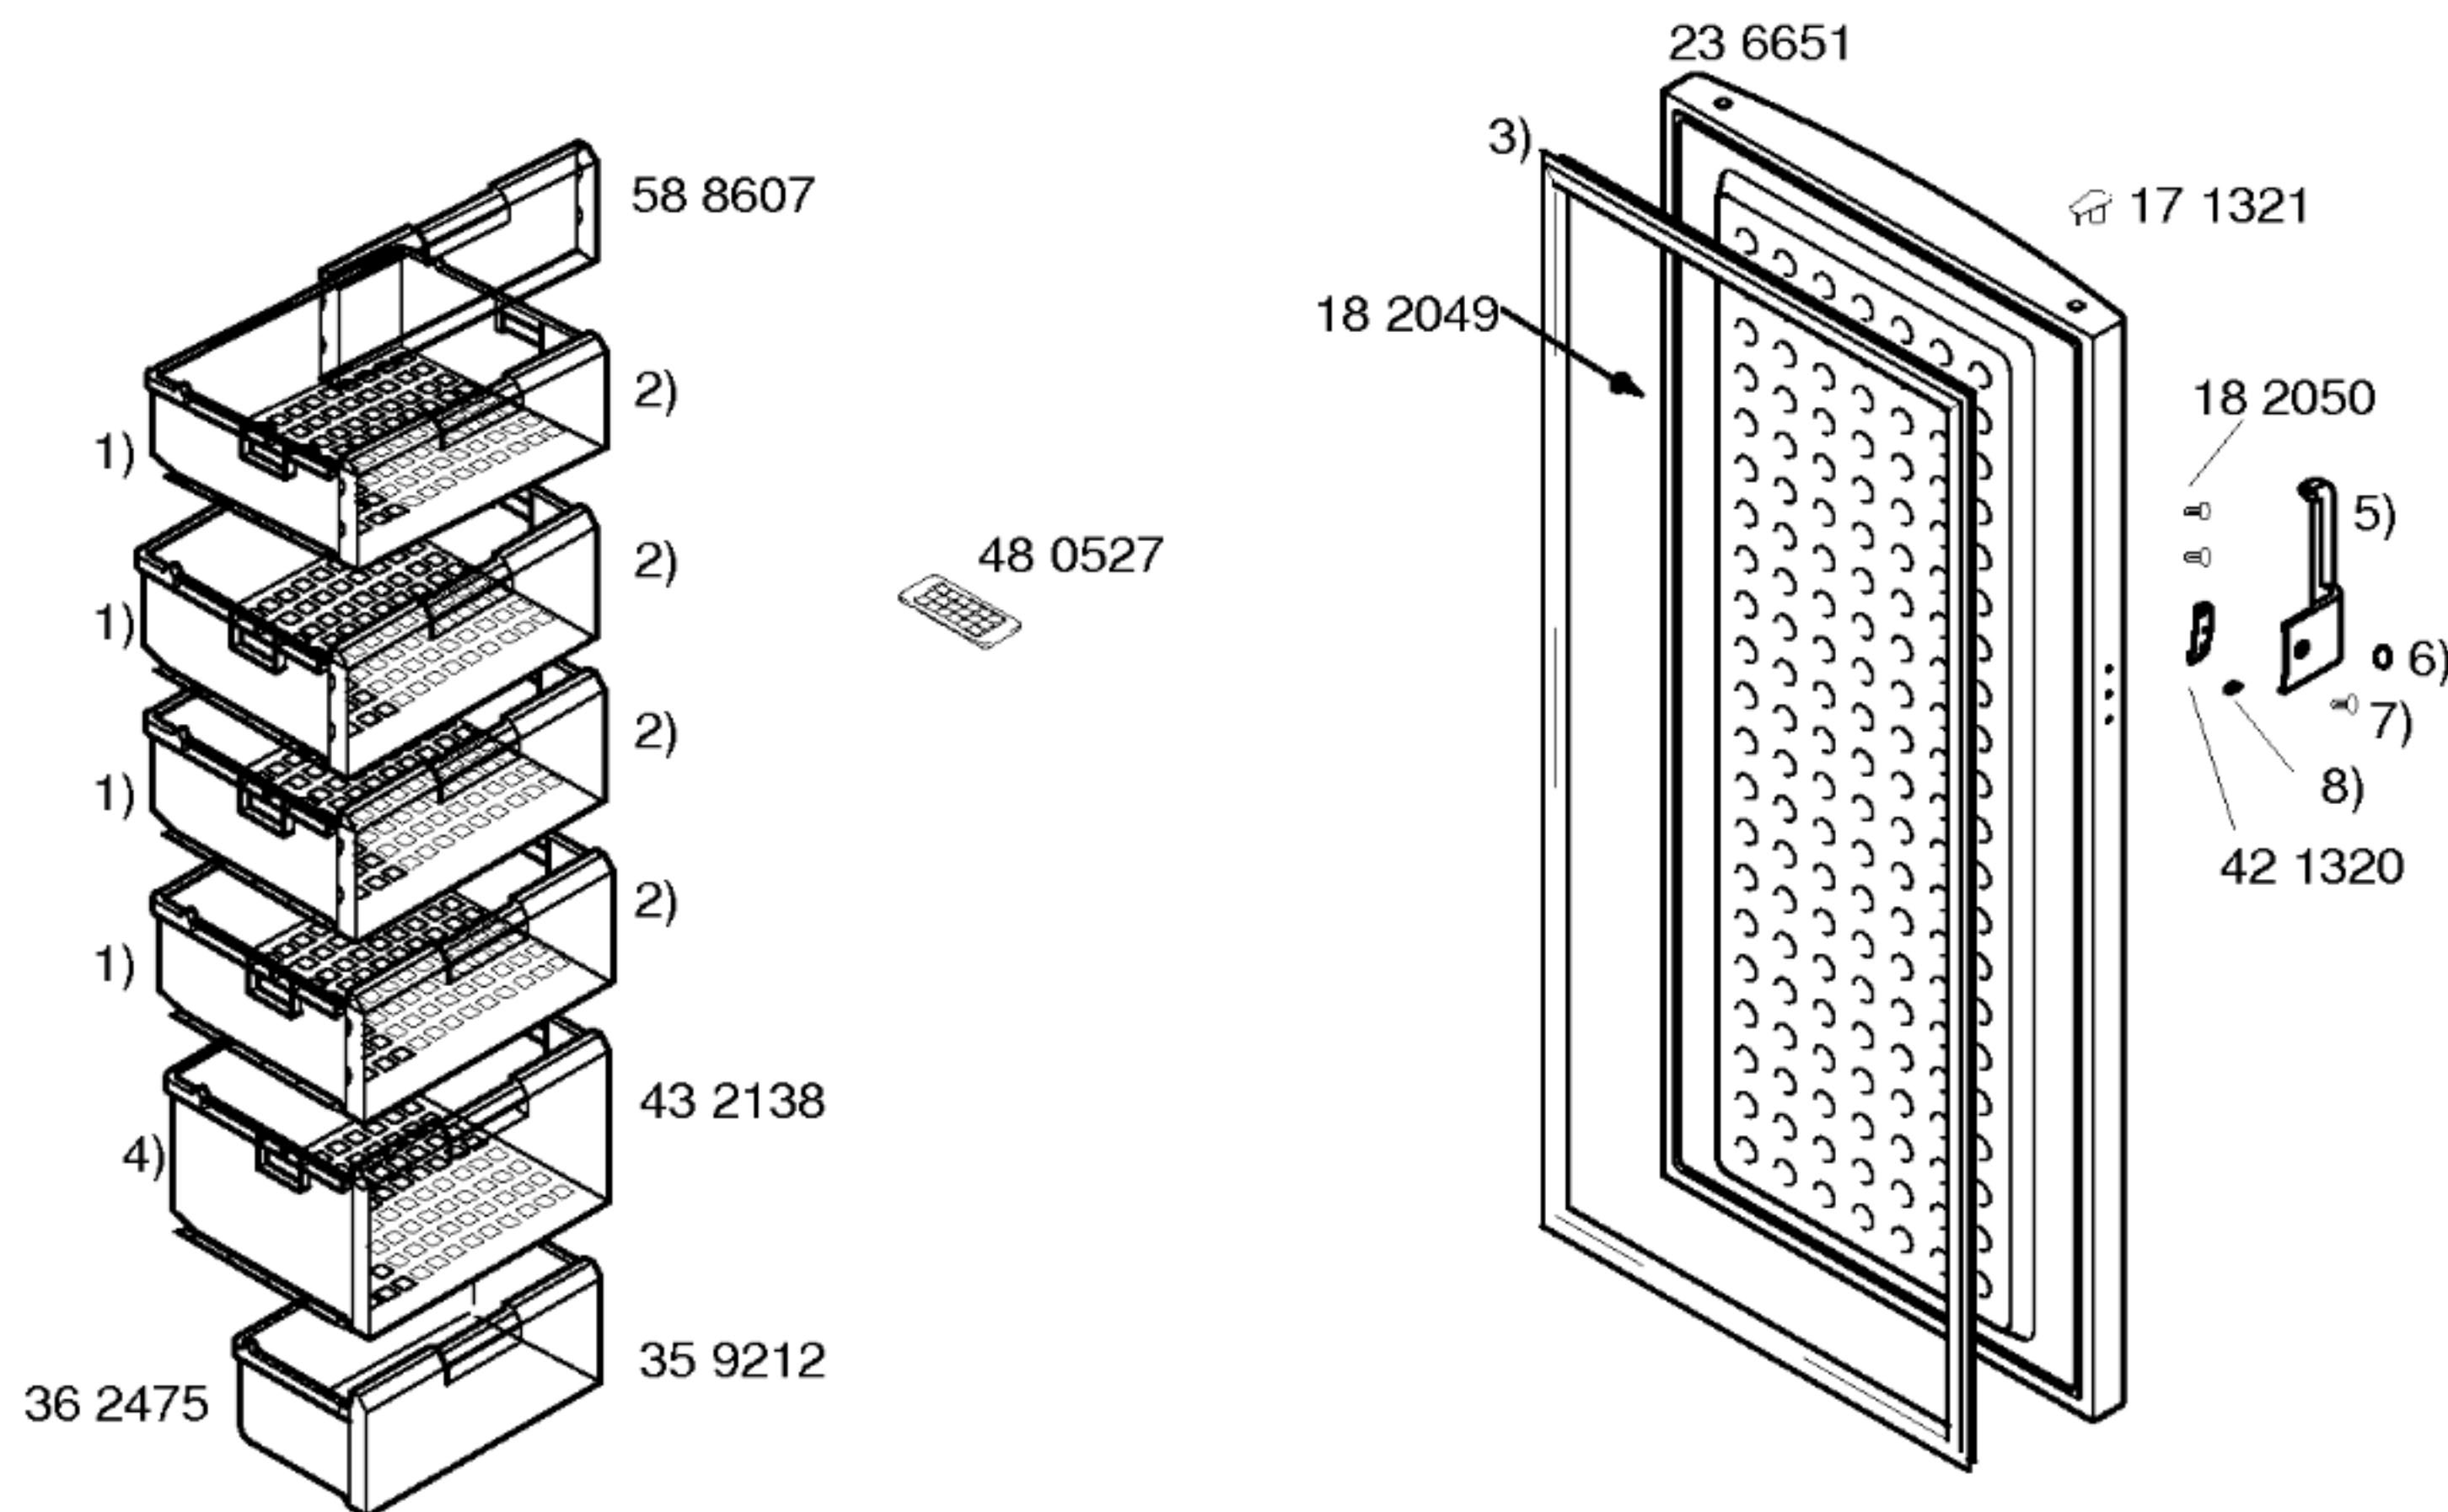

- 1) 43 1043
- 2) 35 9213
- 3) 24 1323
- 4) 43 1044
- 5) 49 1169
- 6) 42 1620
- 7) 42 1625
- 8) 42 1321

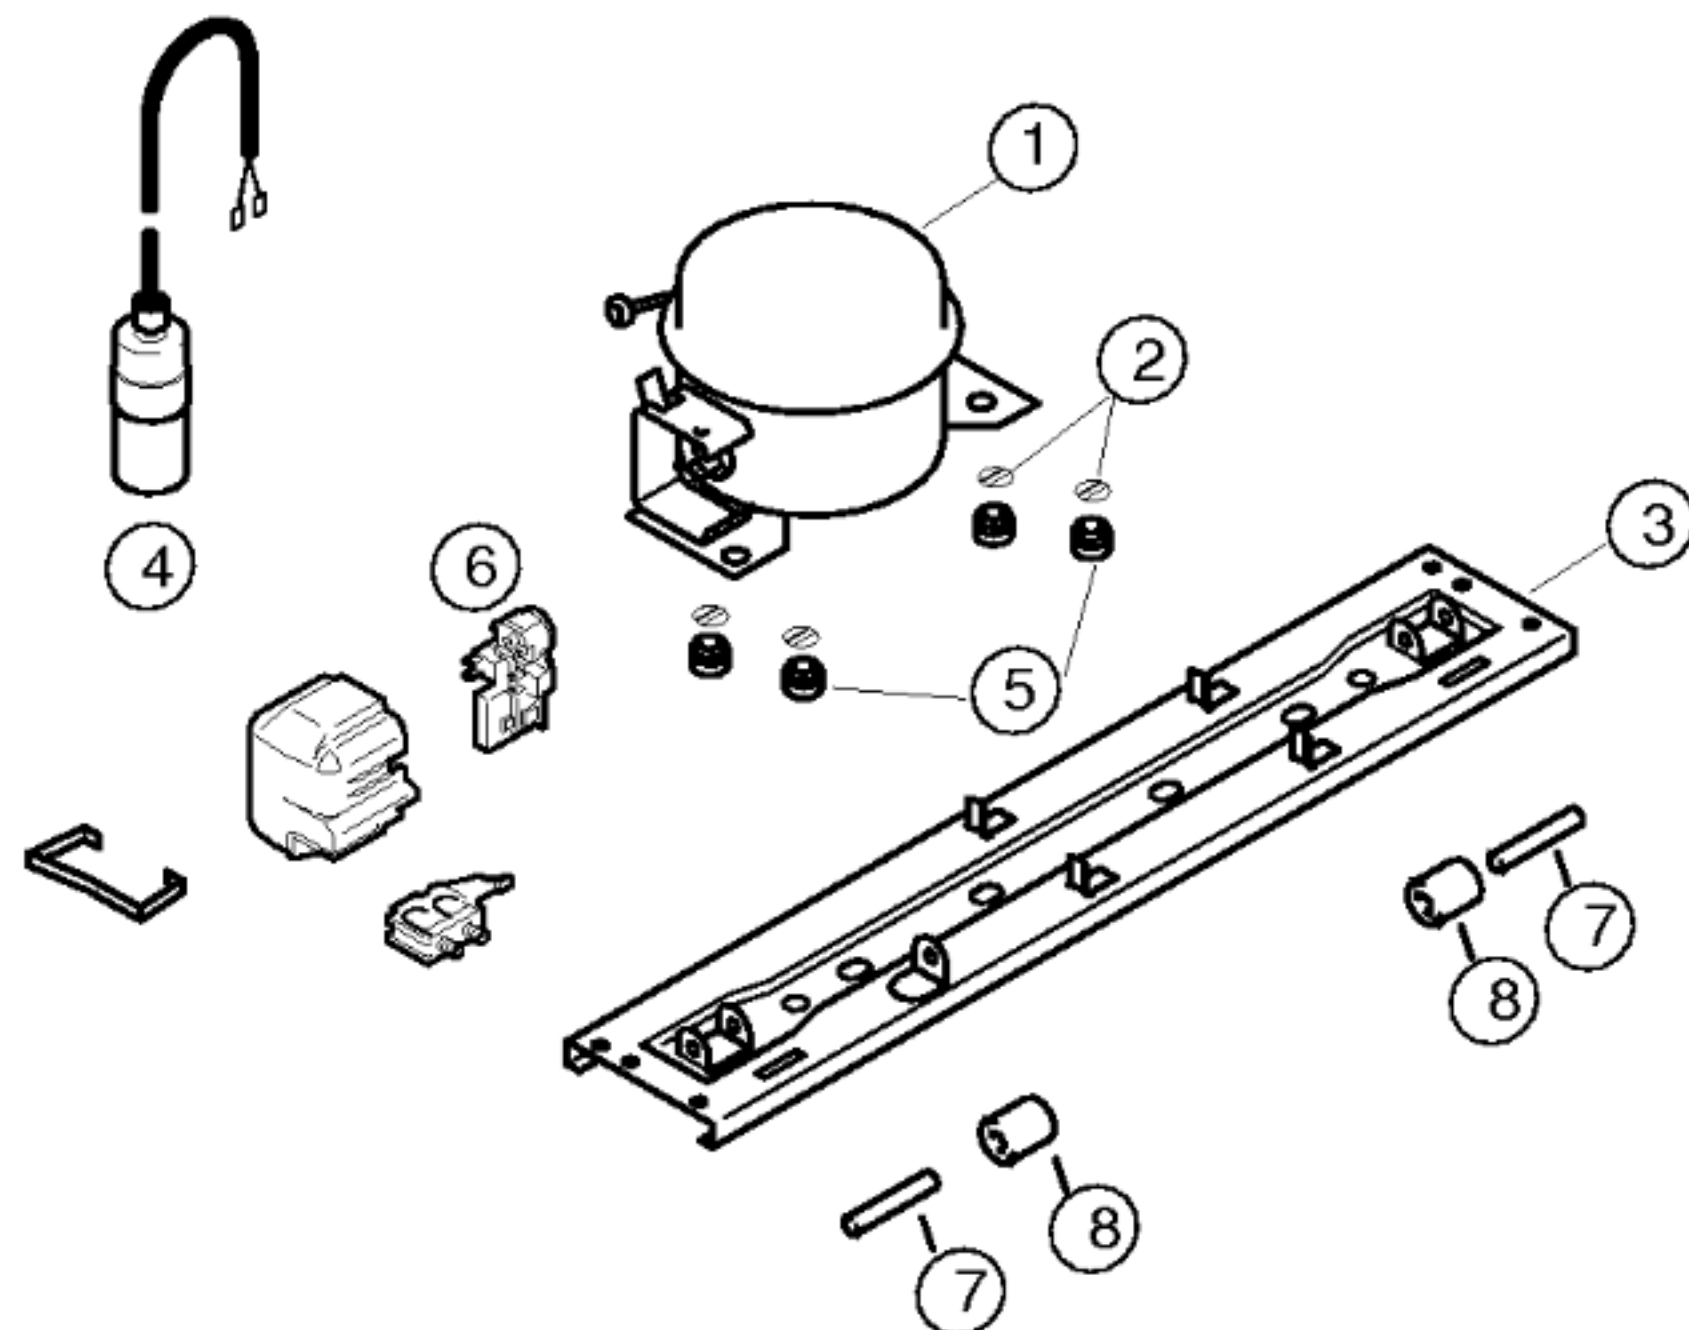

Pos.	V01	V02	V03
	Danfoss TLX8	Matsushita DG125E	Danfoss NLX8.8KK
1	14 3862	14 3614	14 3979
2	17 1519		
3	43 8318		
4	17 4093		
5	16 3427		
6	42 4355	18 7957	16 5570
7	18 1014		
8	17 1318		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
	V01	V02	V03
Verdichter/Compressor/Kompresör	Danfoss	Matsushita	Danfoss
Typ/Type/Tip	TLX8	DG125E	NLX8.8KK
Förderleistung/Delivery/Verim/h	2074		
Anlaufstrom/Starting current/Giris akimi	10,9		
Widerstand/Resistance/Rezistans Ha/Hi/aux.	12,7		
	18,0		
Temp.Reyler/Thermostat/Termostat			
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Acma kapama degerleri	..ein/acma °C		
Valeurs de commutation/Termostat degeri	..aus"/kapama		
(..abtaven' od)	..alarm'		
Füllmenge/Fill. quantily/ Dolum miktari	R600	g	*
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans			
Widerstand/Resistance/Direnc	Ω		
Leistung/Power/Guc	W		
Ventilador/Blower/Vantilatör			
Widerstand/Resistance/Rezistans	Ω		
Magnetventil/Magnetic valve/Manyetik valf			
Widerstand/Resistance/Rezistans	Ω		
Spannung/Voltage/Gerilim	V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz