


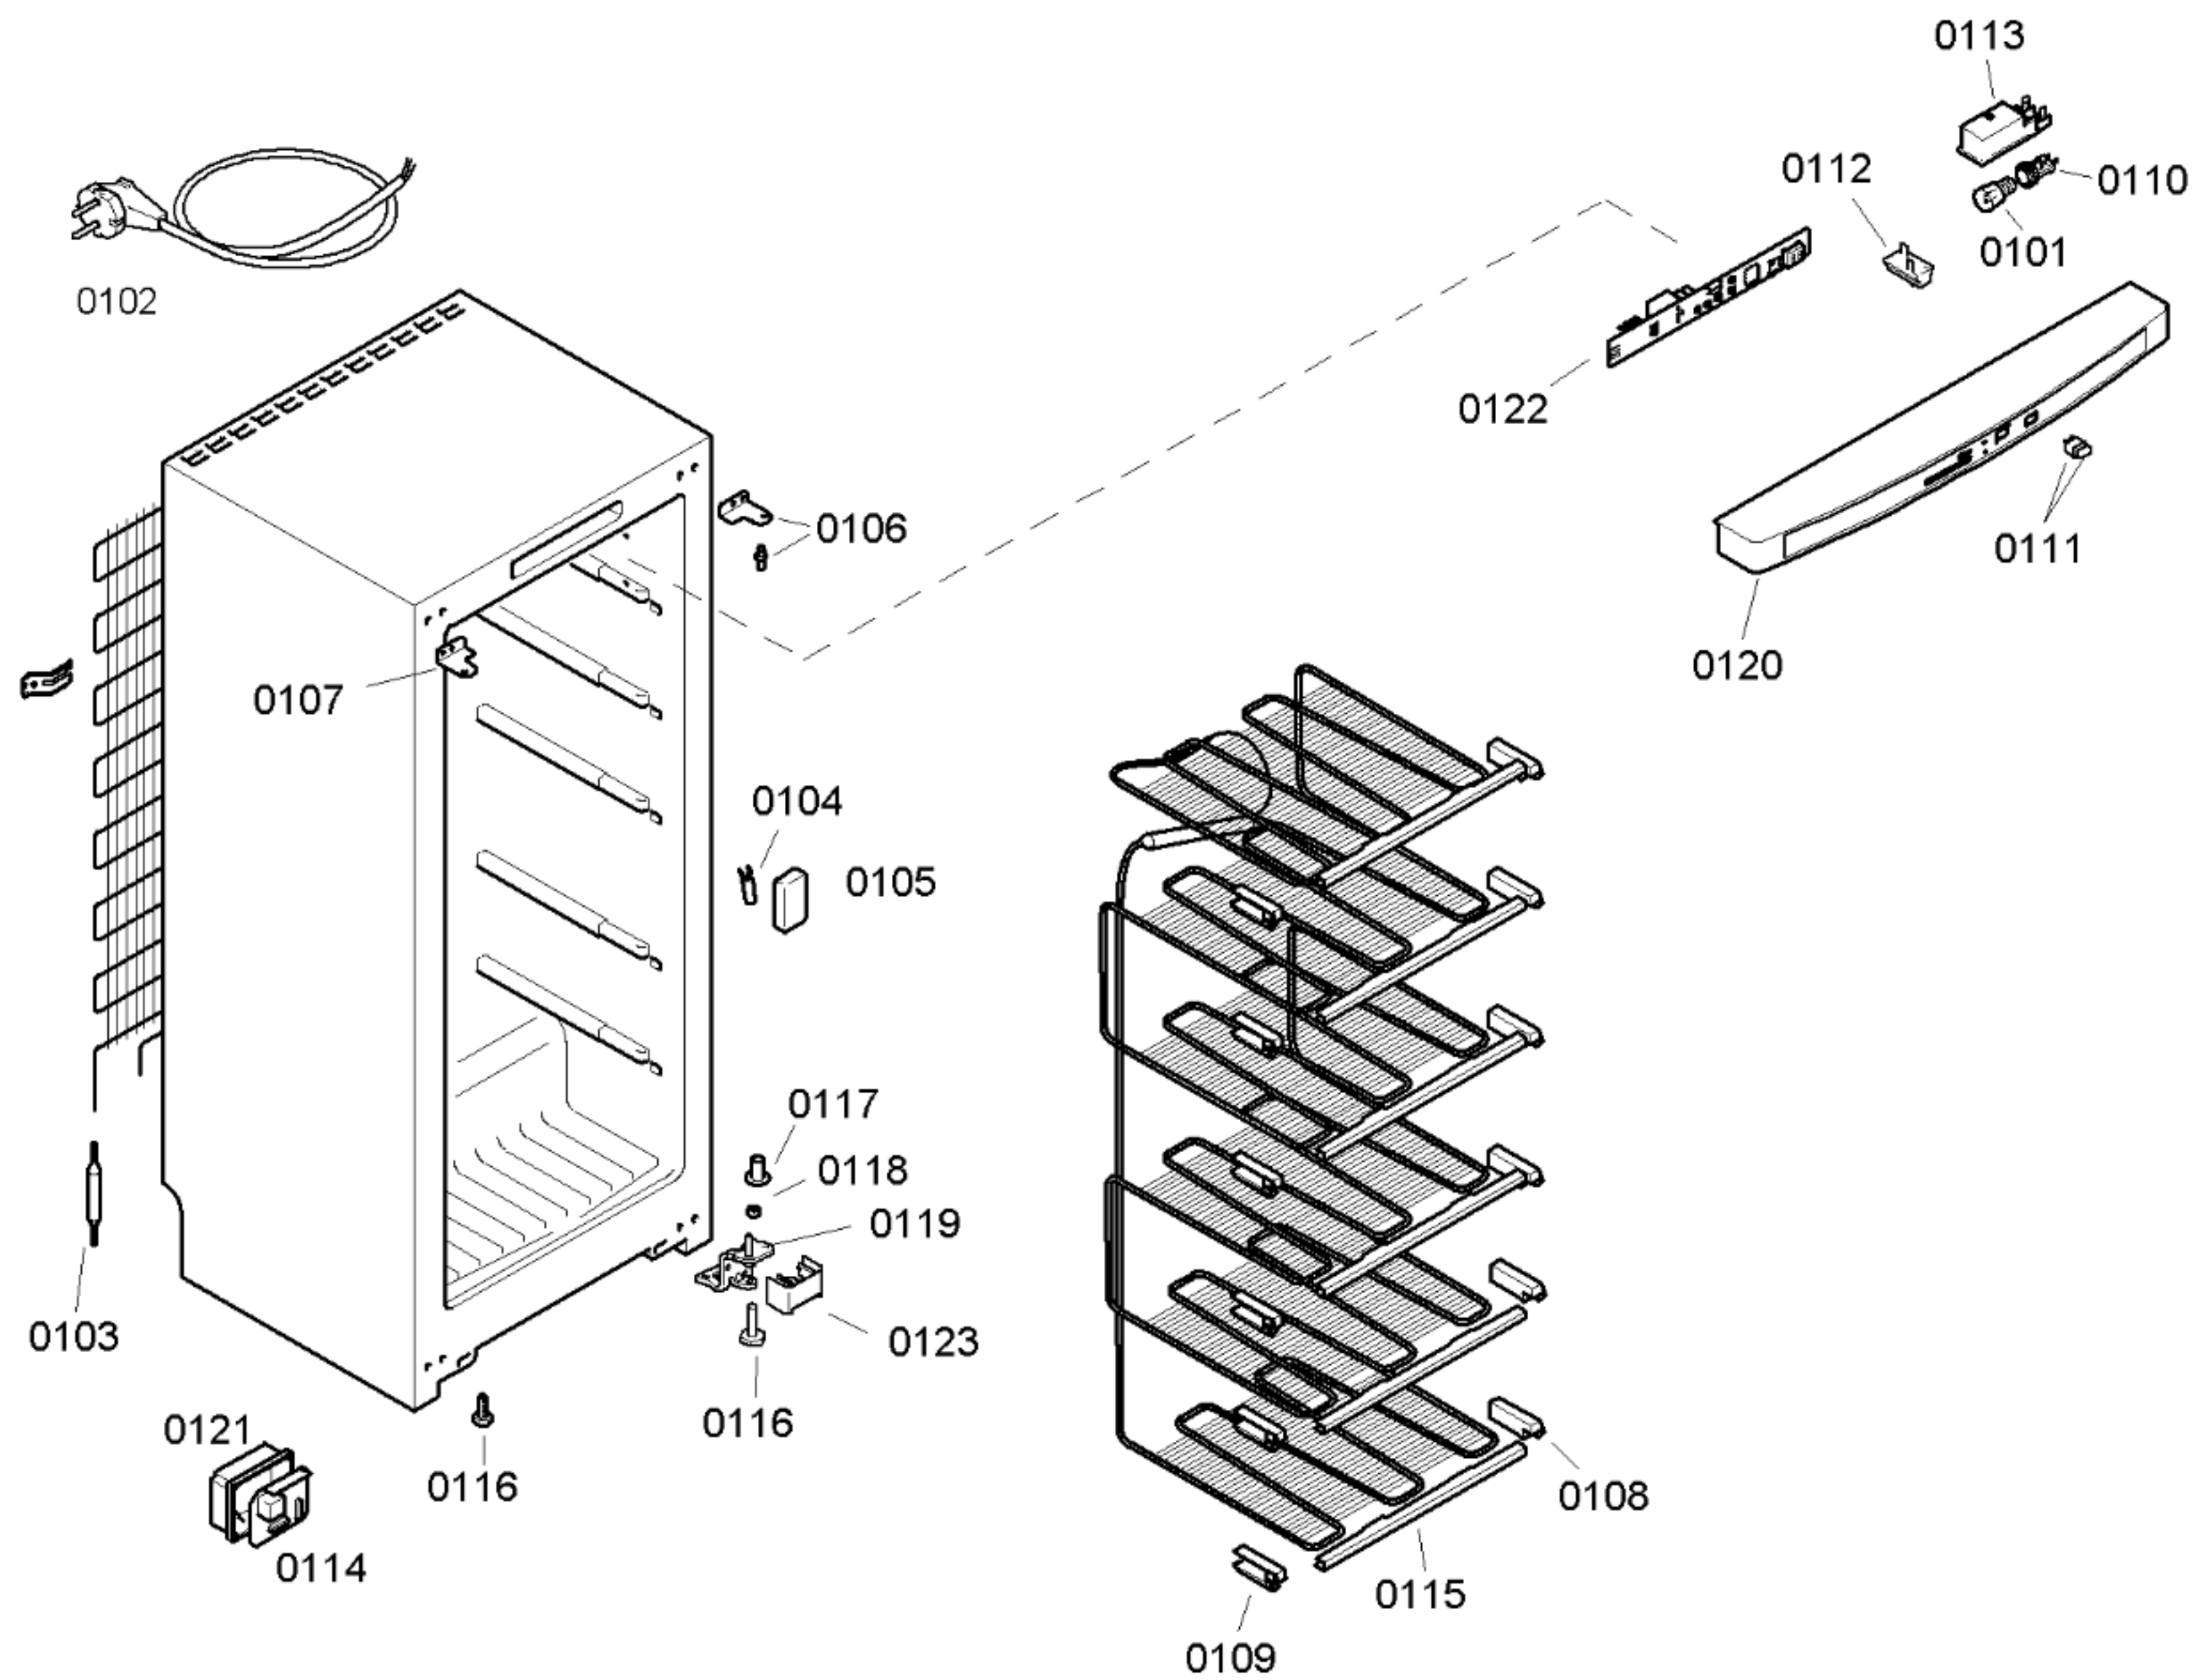


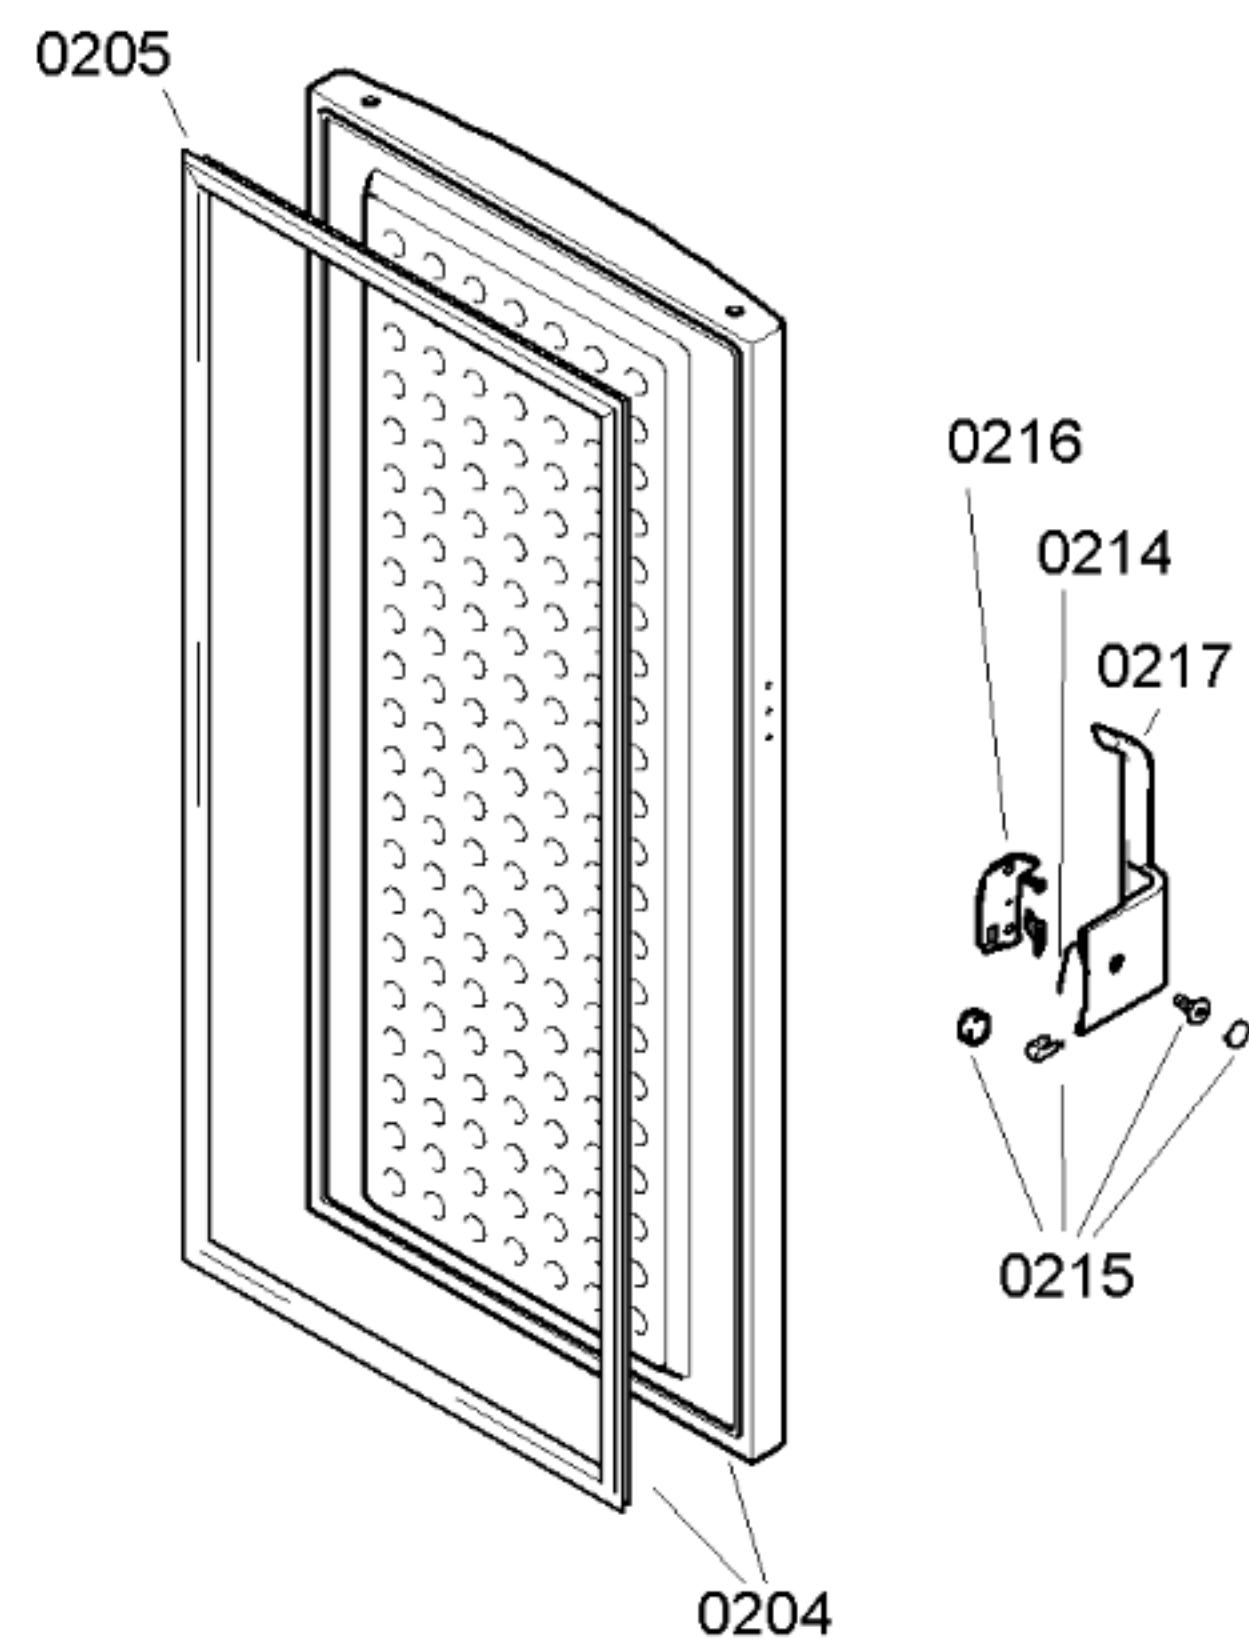

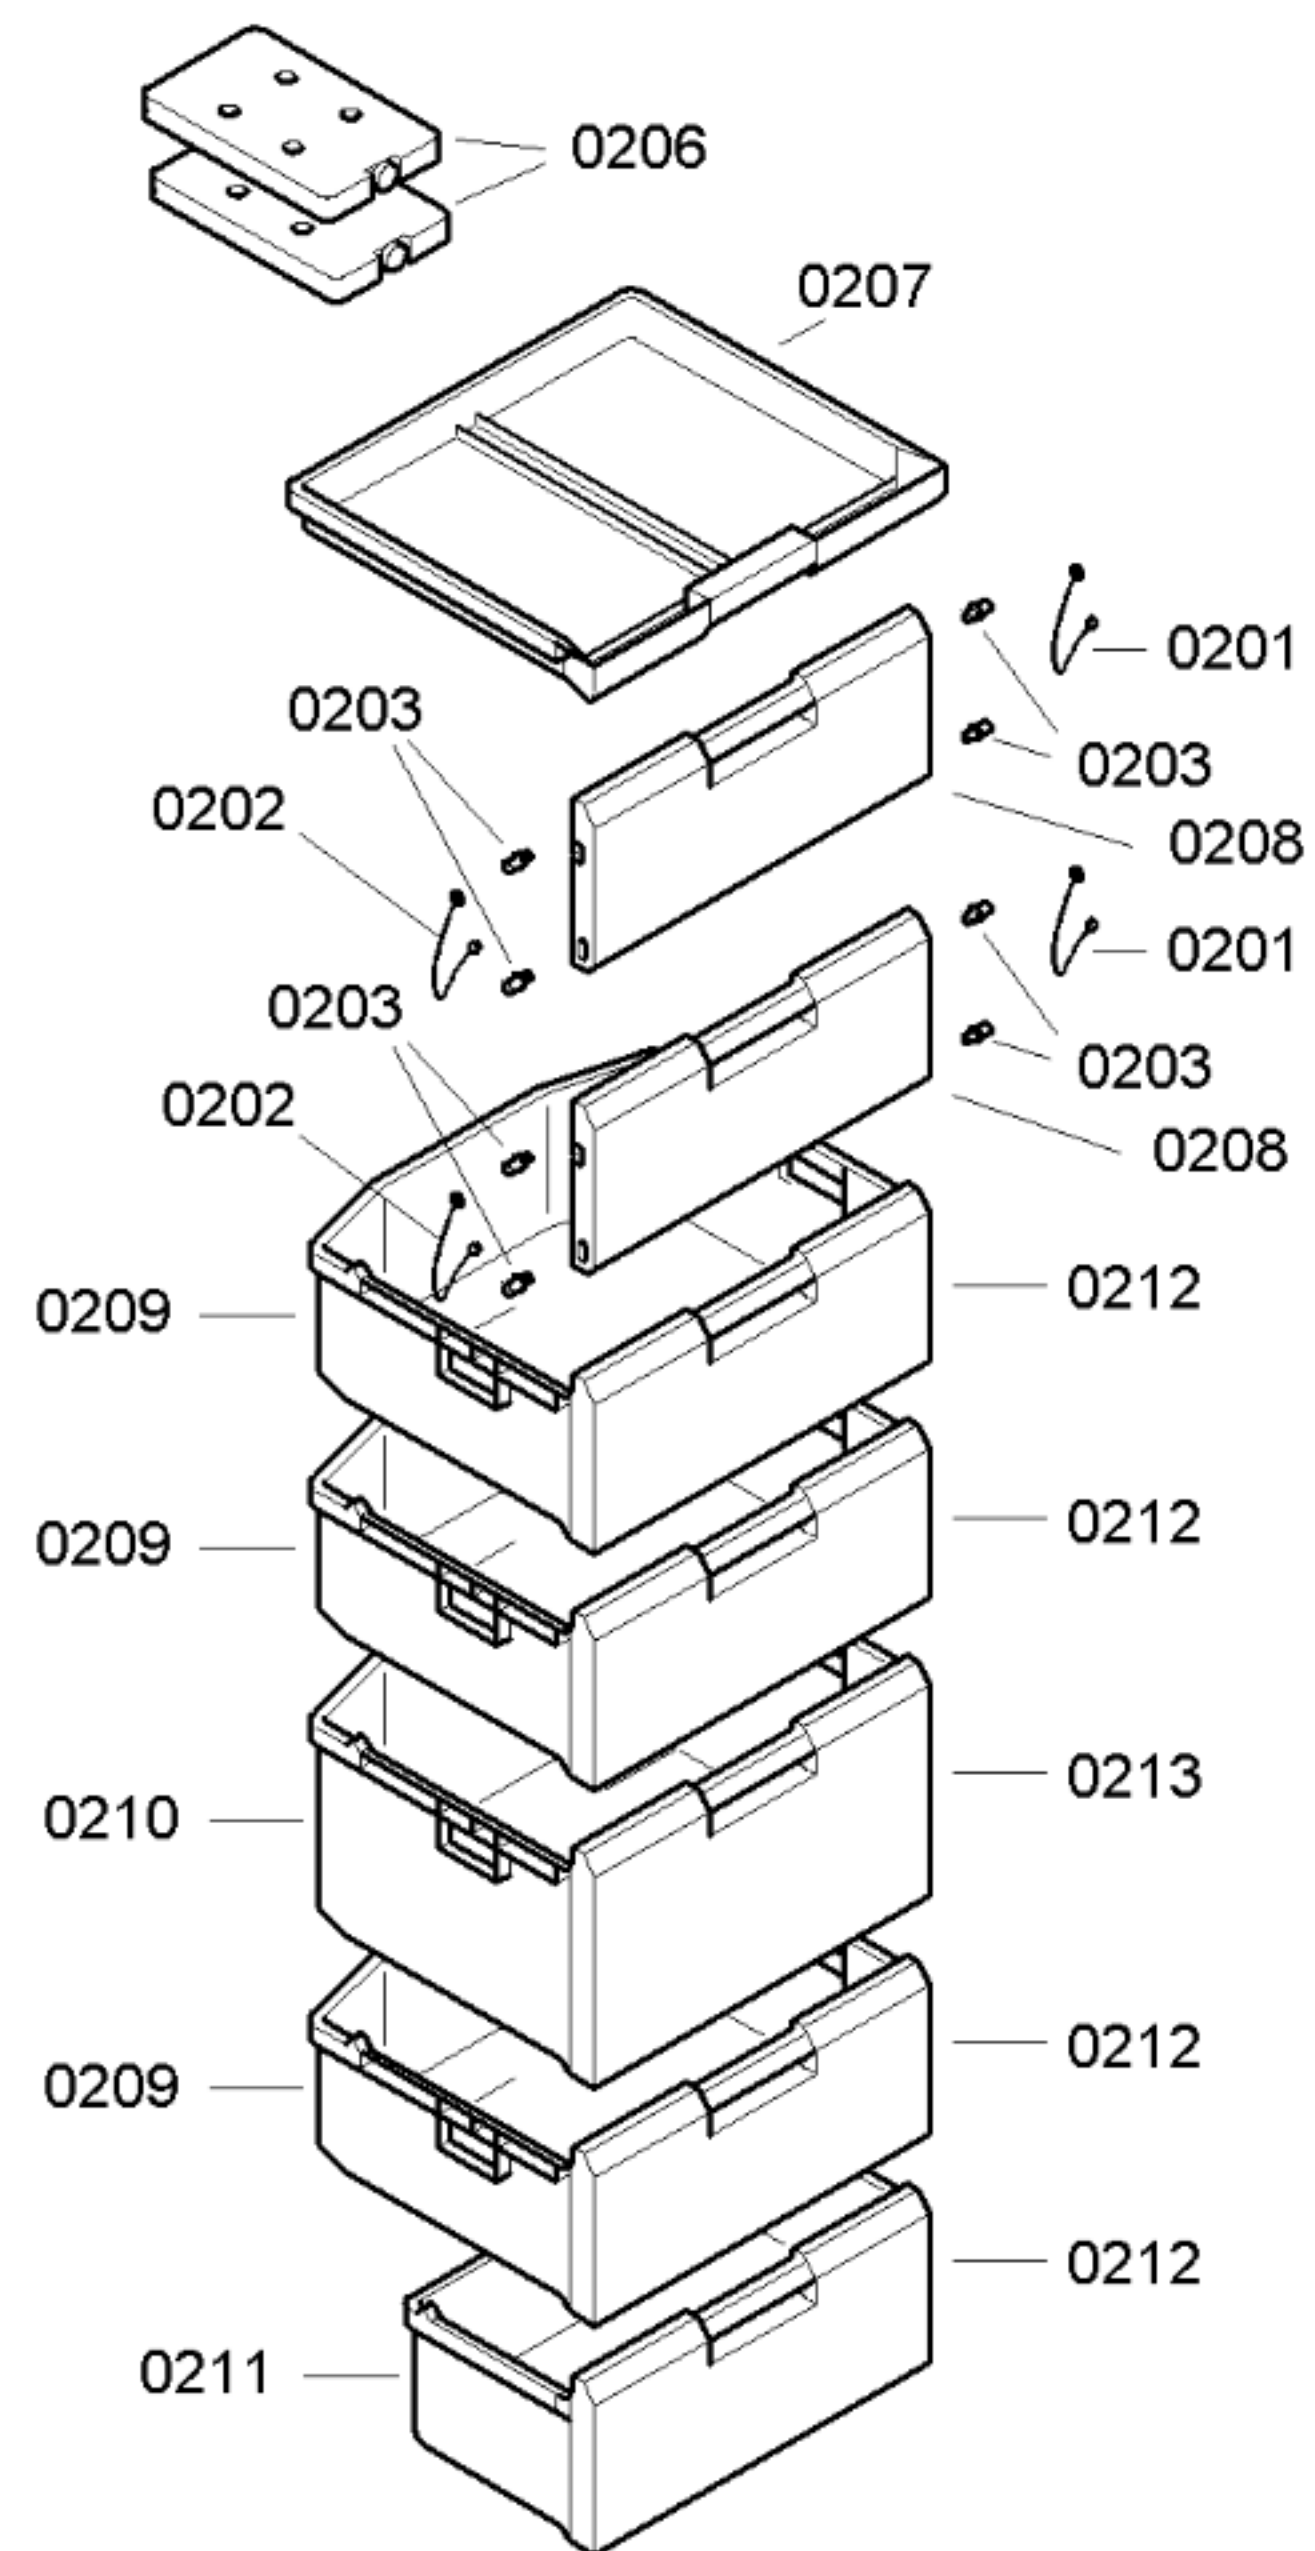

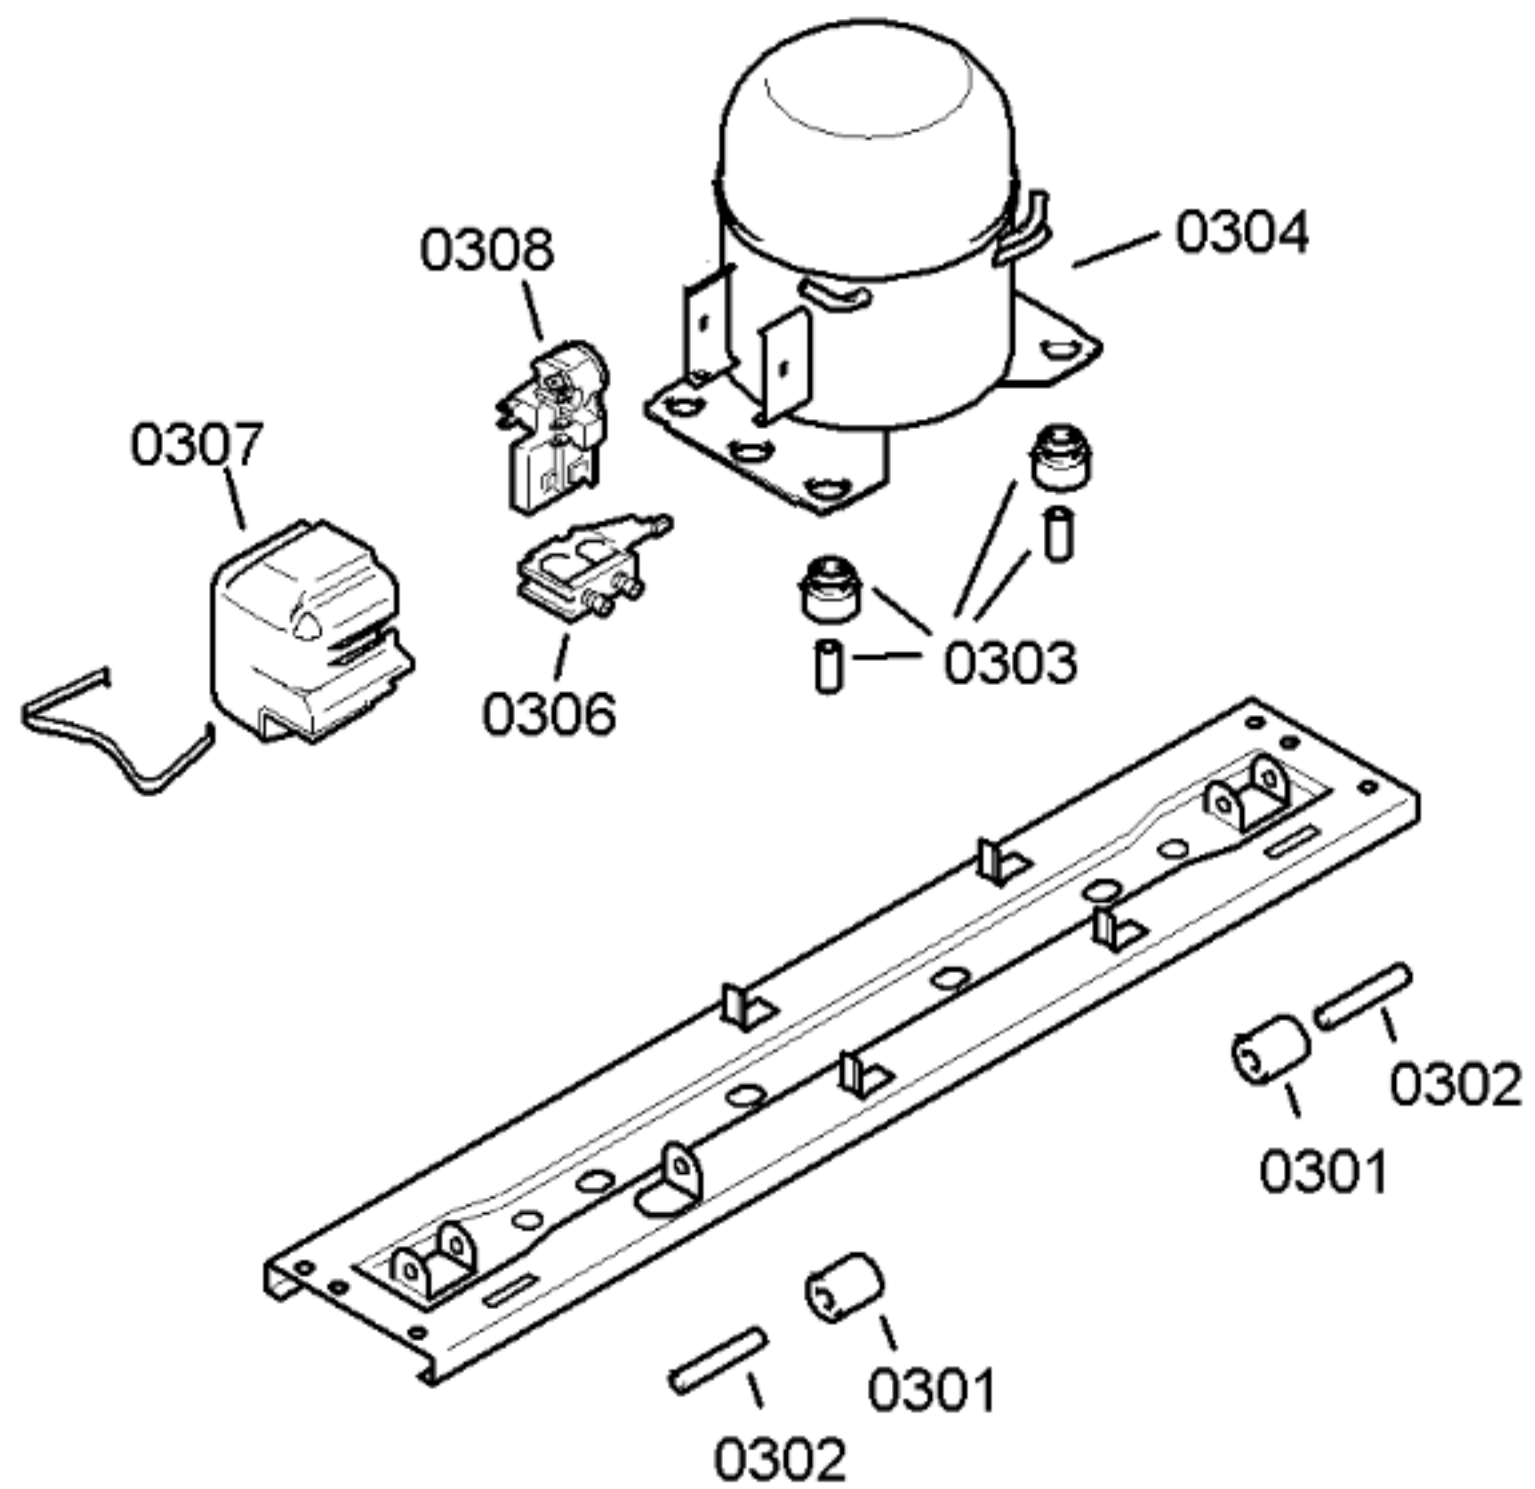

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES							
Verdichter/Compressor/Compresseur		Matsushita		Danfoss			
Typ/Type		DG 110E		TLX 8 KK2			
Förderleistung/Delivery/Débit		l/h	0355	0377			
Anlaufstrom/Starting current/Cour de démarrage		A	8,6				
Widerstand/Resistance/Résistance		Ha/main/prin	W	11,78	21,6		
		Hi/aux	W	14,58			
Temp.-Regler/Thermostat							
Typ/Type							
Regelstellung/Position							
Schaltwerte/Switching values		"warm"					
Valeurs de commutation		"kalt"					
		"alarm"					
Füllmenge/Fill.quantity/Charge		R600a	*				
Anschlußwert/Conn.load/Puiss. connectée		W	119		103		
Heizung/Heater/Chauffage							
Widerstand /Resistance/Résistance		W					
Leistung/Power/Puissance		W					
Ventilator/Blower/Ventilateur							
Widerstand /Resistance/Résistance		W					
NTC-Fühler / Sensor		° C		kW		° C	
		+10		9,95 \$0,18		-18 43,31 \$1,10	
		+5		12,70 \$0,18		-22 54,66 \$1,59	
		0		16,33 \$0,16		-26 69,42 \$2,29	
Magnetventil/Magnetic valve/Electrovanne							
Widerstand/Resistance/Résistance		W					
Spannung/Voltage/Tension		V					