



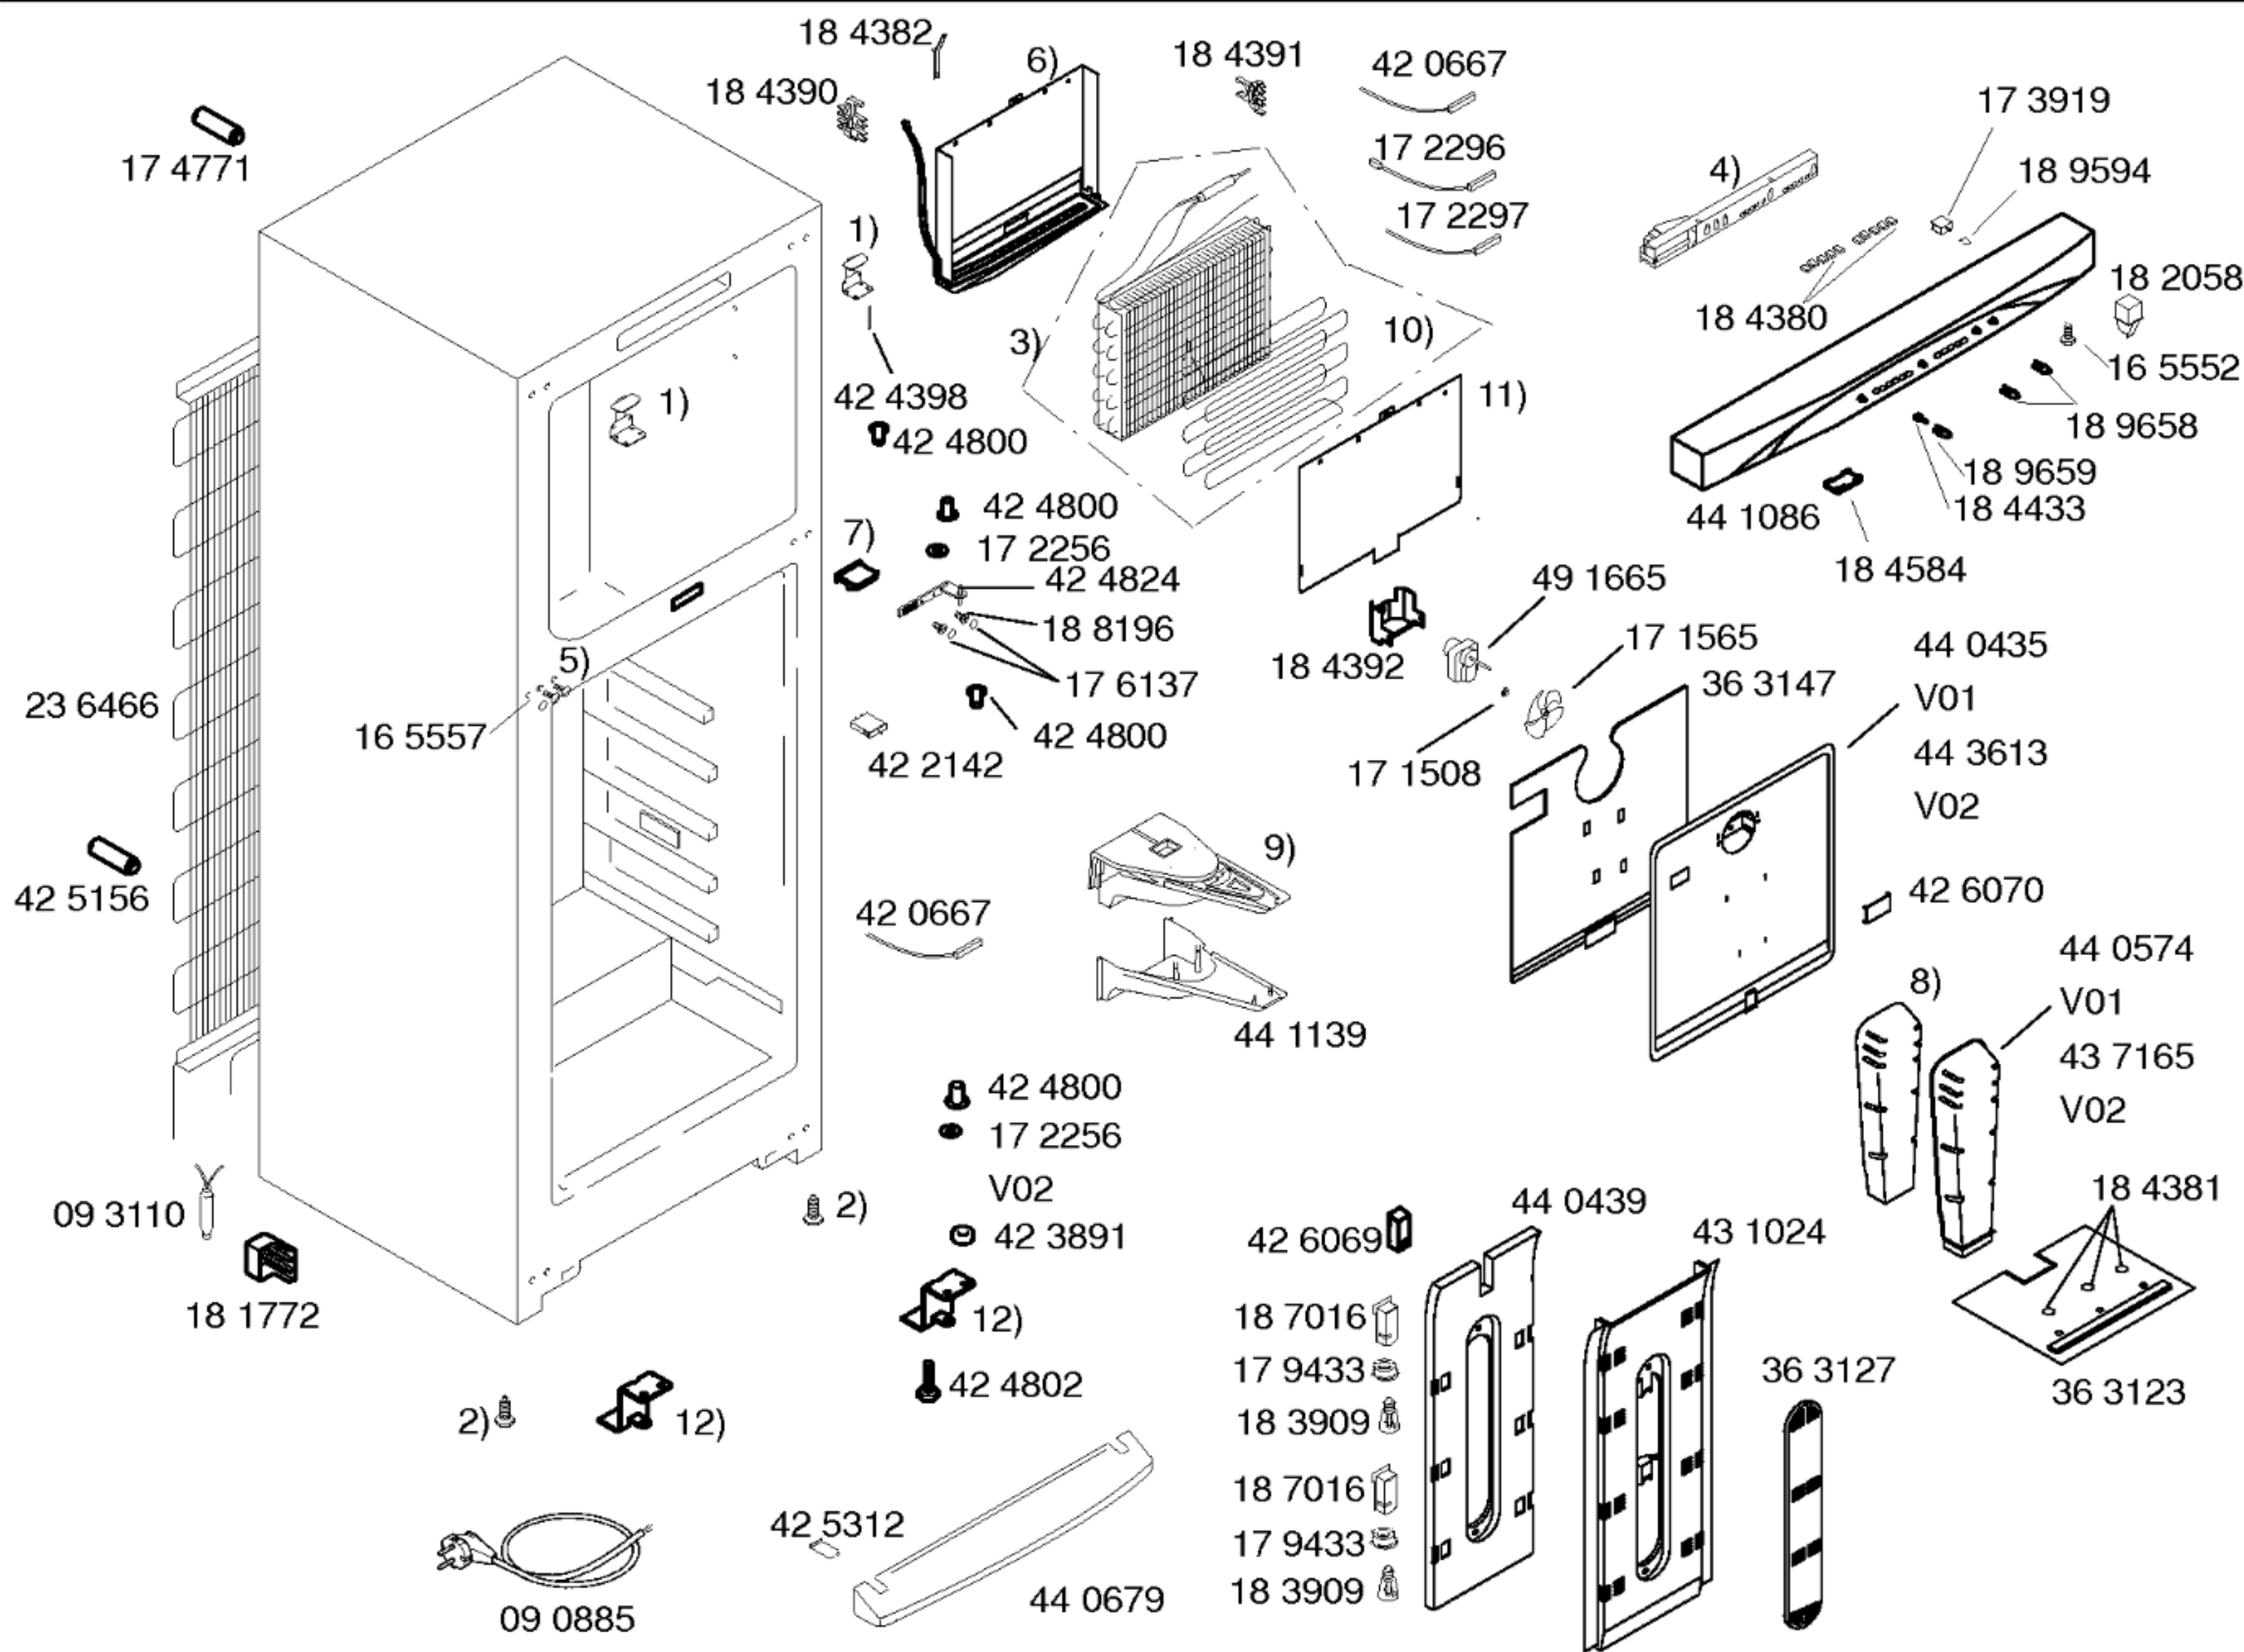


Gebrauchsanweisung
59 3564
(GB)

- 1) 17 1312
- 2) 42 4340
- 3) 43 8726
- 4) 49 5511
- 5) 16 5552
- 6) 36 9905
- 7) 41 8128
- 8) 43 7166
- V01
- 44 3611
- V02
- 9) 74 1547
- 10) 36 9816
- 11) 36 6902
- 12) 42 4801
- V01
- 42 8184
- V02

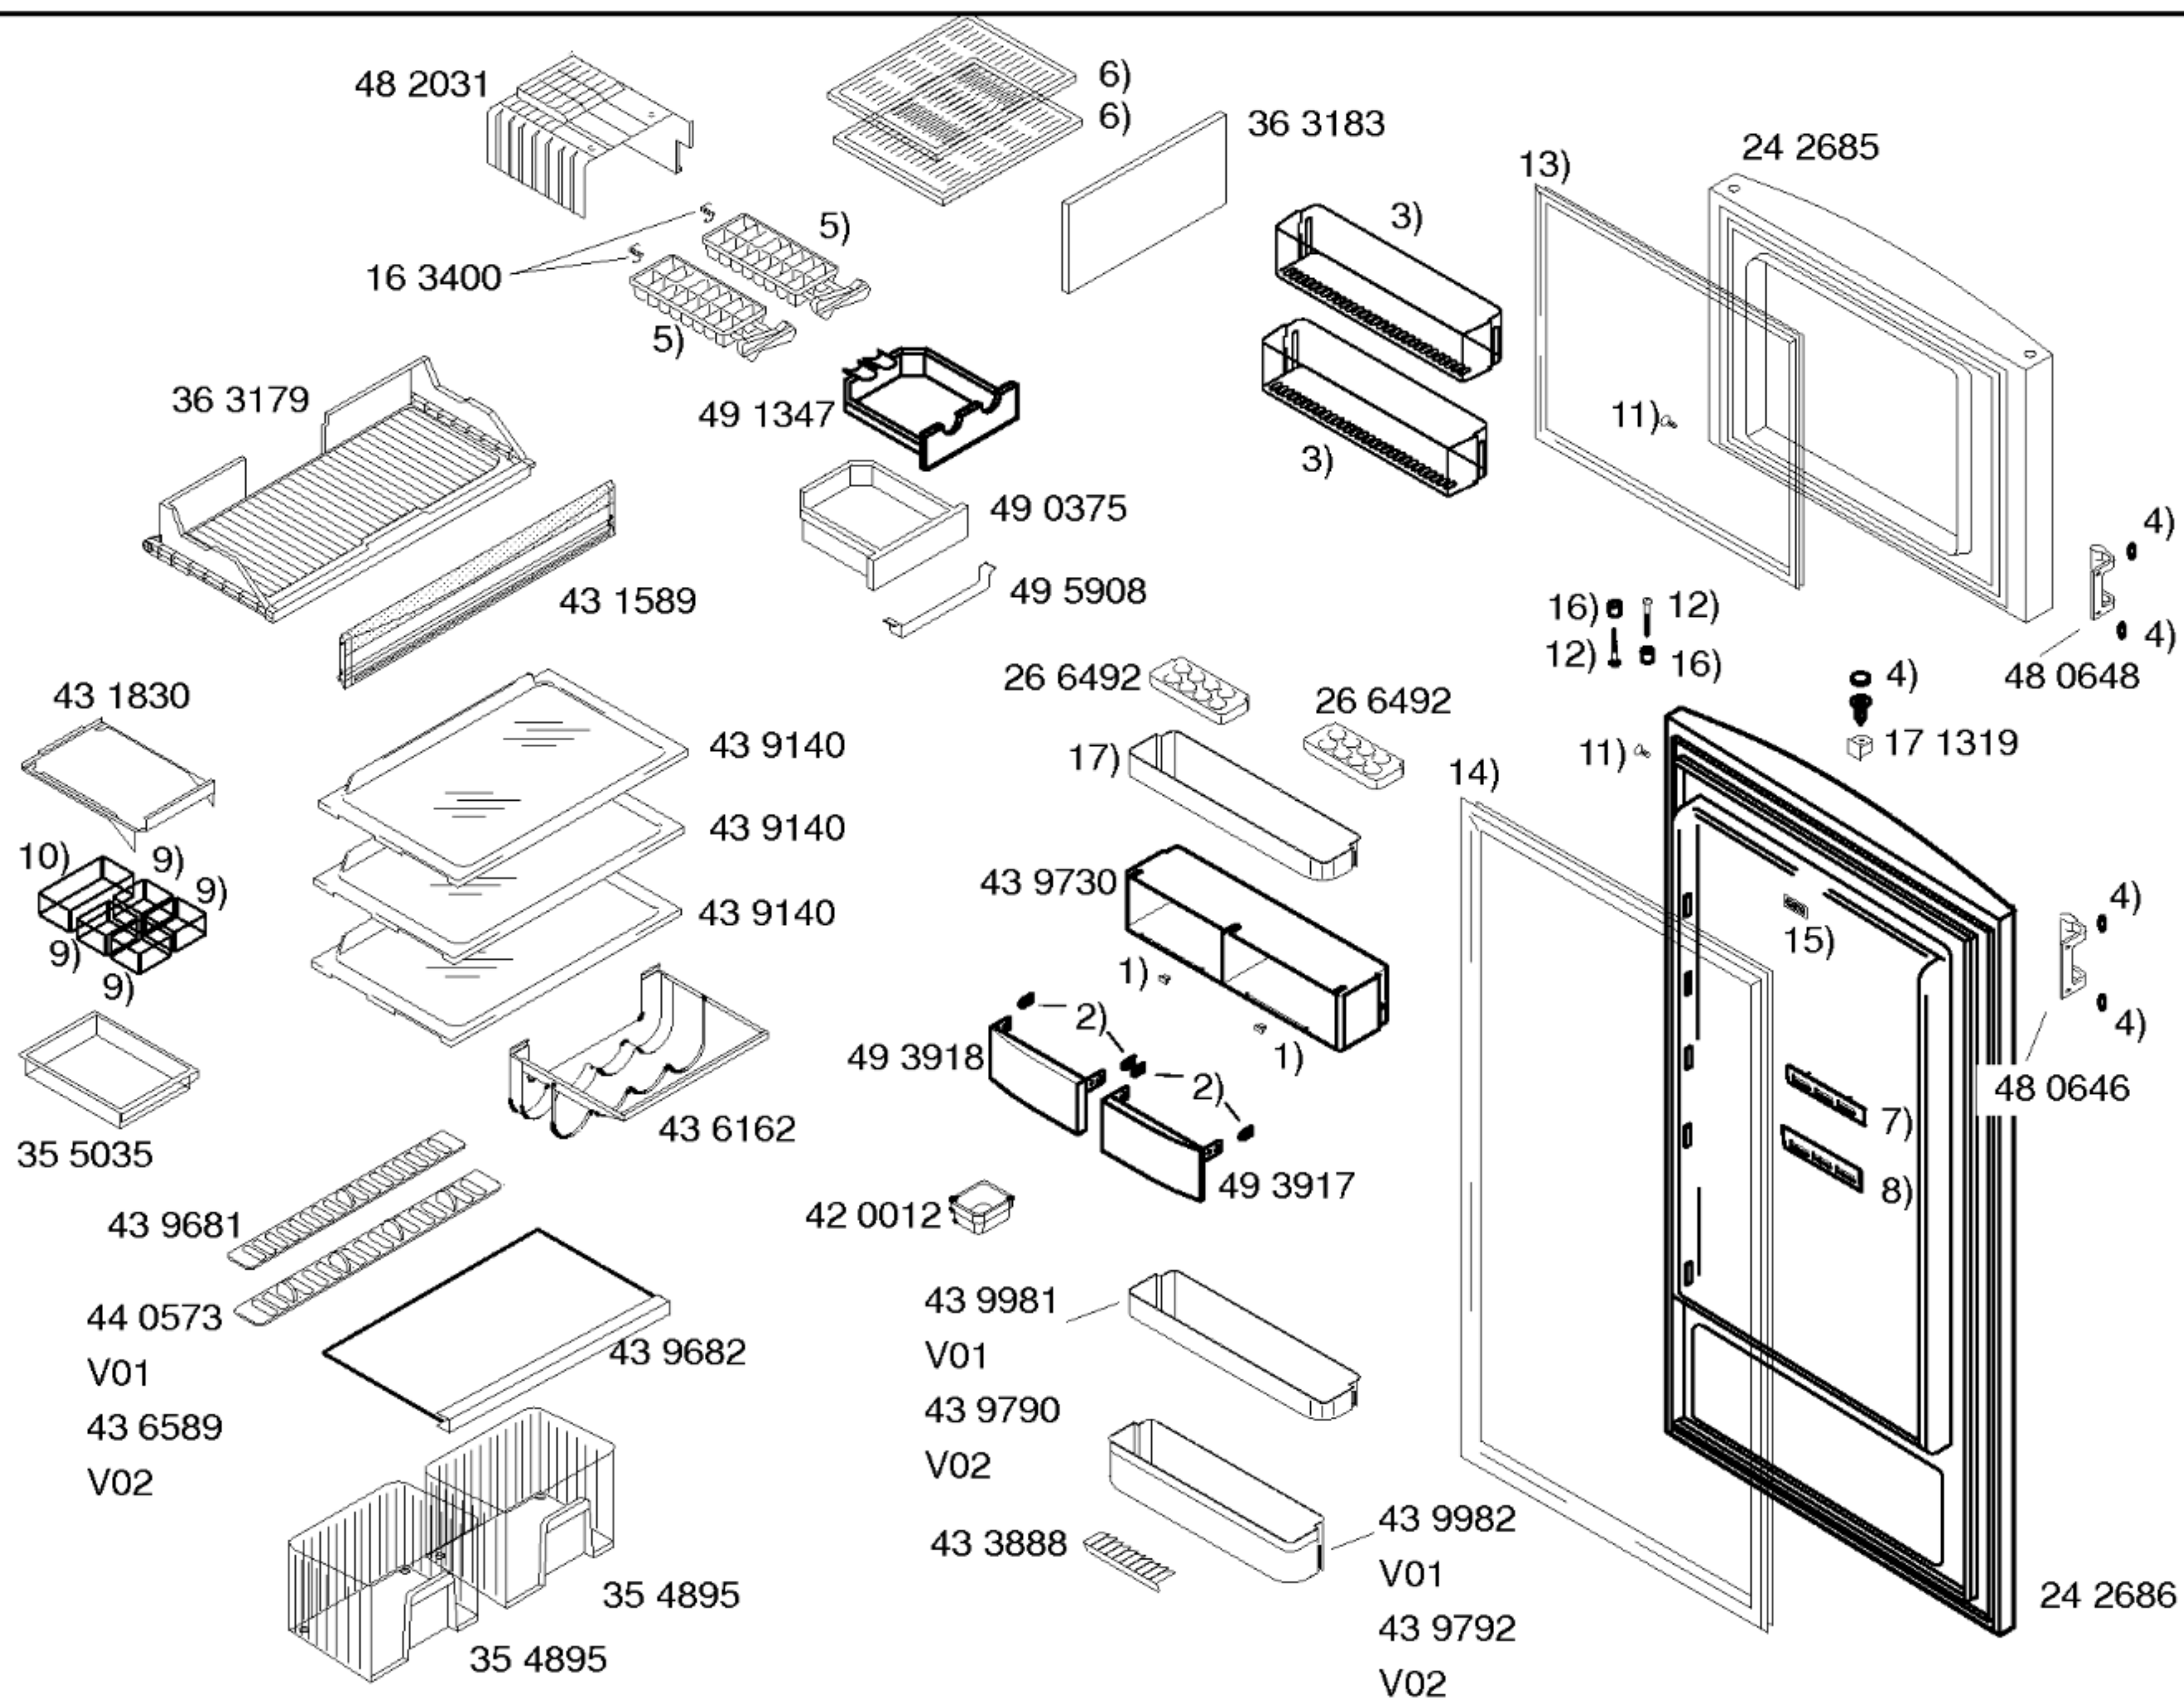

- | | |
|-----|---------|
| 1) | 42 0752 |
| 2) | 42 4431 |
| 3) | 43 4621 |
| 4) | 16 5557 |
| 5) | 49 1361 |
| 6) | 36 3171 |
| 7) | 49 4865 |
| 8) | 49 4864 |
| 9) | 18 1771 |
| 10) | 18 1945 |
| 11) | 06 0083 |
| | V01 |
| | 17 3747 |
| | V02 |
| 12) | 18 8194 |
| 13) | 47 4027 |
| 14) | 24 2330 |
| 15) | 49 4877 |
| 16) | 18 8188 |
| 17) | 44 0125 |
| | V01 |
| | 43 9788 |
| | V02 |

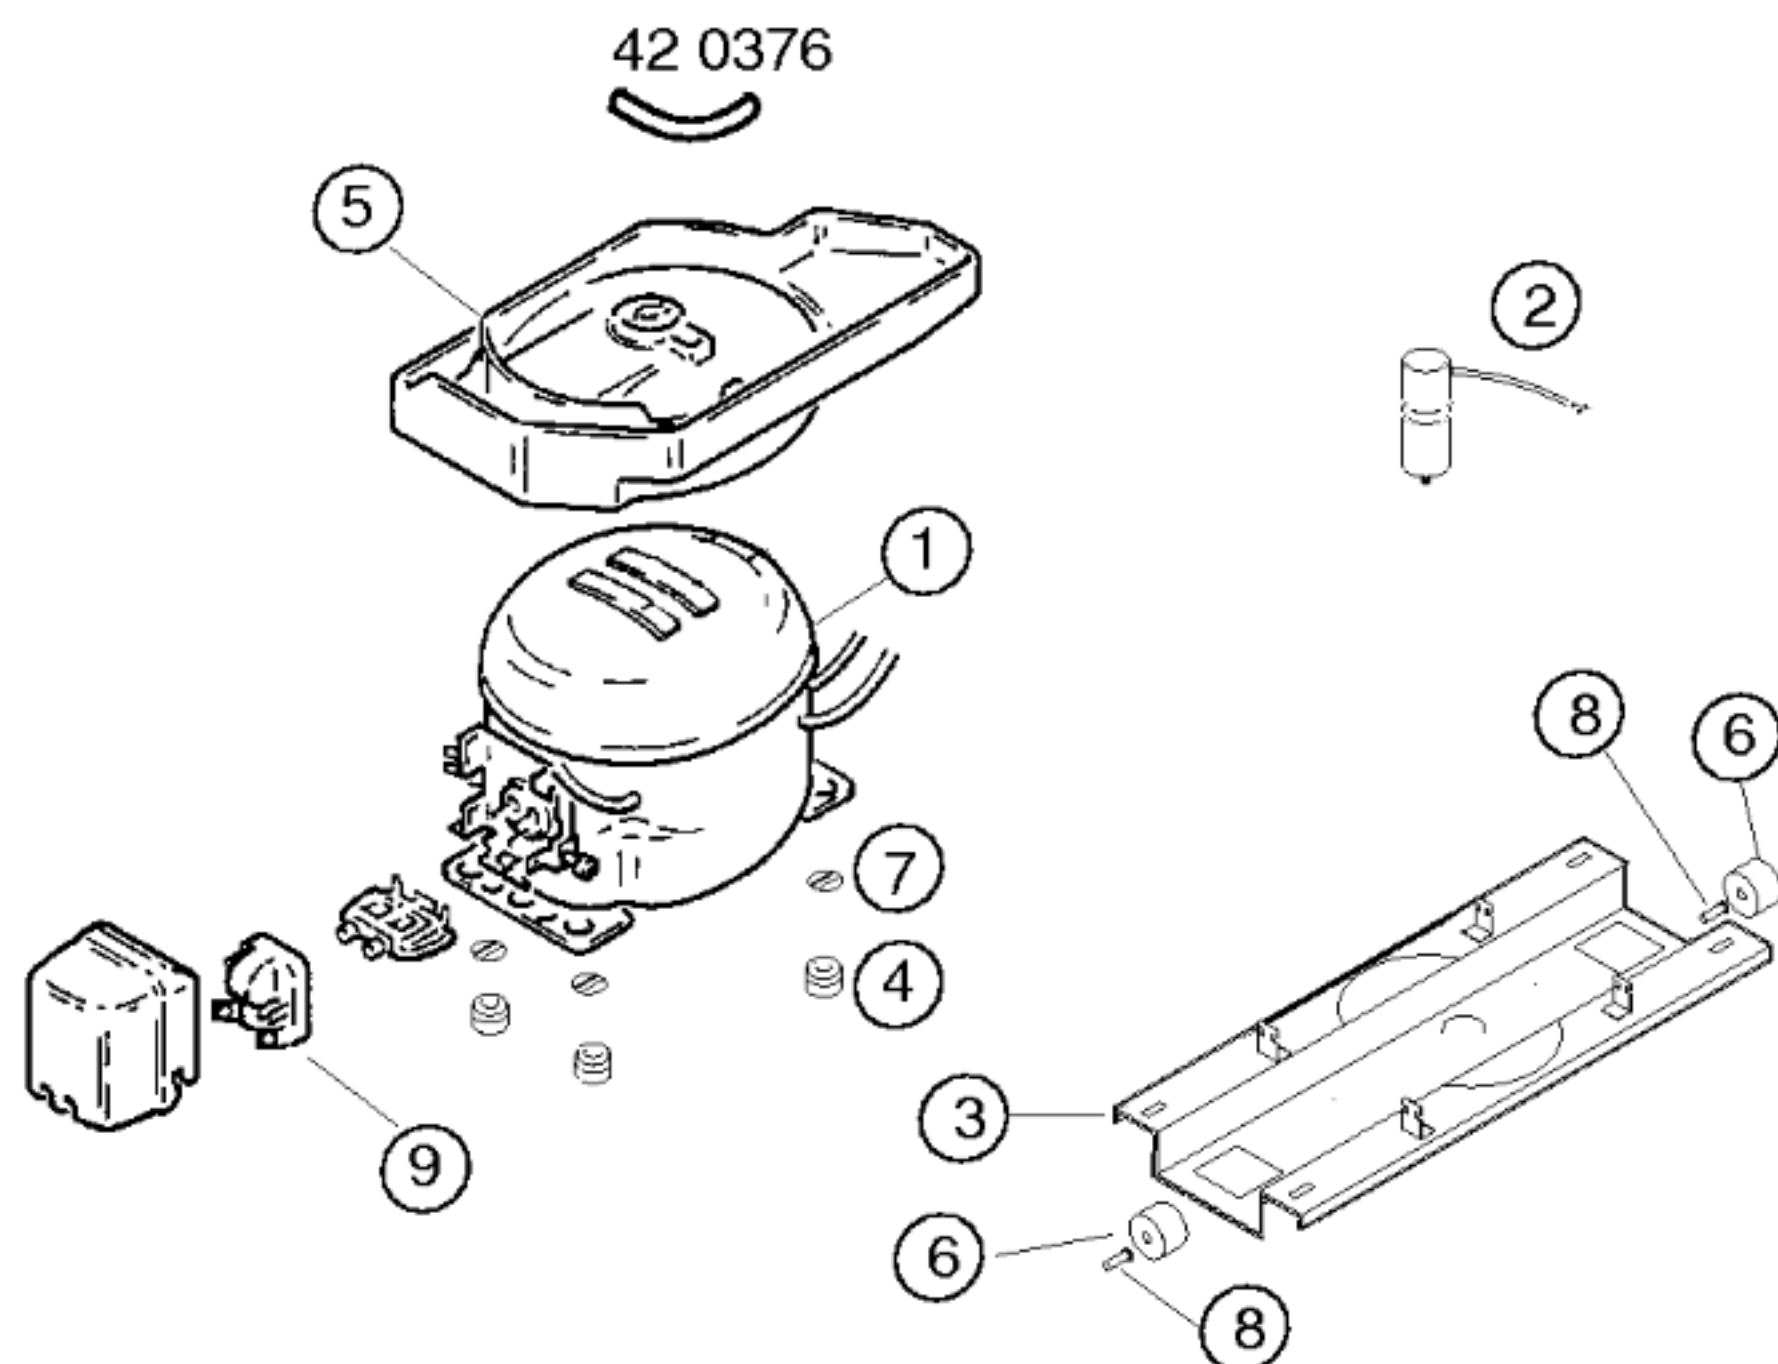

	V01	V02	
Pos.	Danfoss		
	NLE15KTK2		
1	14 2207		
2	17 4093		
3	35 4583		
4	16 3427		
5	49 4671		
6	17 1318		
7	17 1519		
8	18 1014		
9	42 6296	16 5570	
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör	Danfoss		
Typ/Type/Tip	NLE15KTK2		
Förderleistung/Delivery/Verim/h	8		
Anlaufstrom/Starting current/Giris akimi	A		
Widerstand/Resistance/Rezistans Ha/Hi/aux.	Ω		
Temp.Reyler/Thermostat/Termostat	Elektronisch		
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu			
Schaltwerte/Actua kapama degerleri	..ein/acma °C		
Valeurs de commutation/Termostat degeri	..aus"/kapama		
(..abtaven' od)	..alarm'		
Füllmenge/Fill. quantily/ Dolum miktari	R600a	g	58
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans	Ω		
Widerstand/Resistance/Direnc	W		
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör	Ω		
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf	Ω		
Widerstand/Resistance/Rezistans	V		
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakiniz