



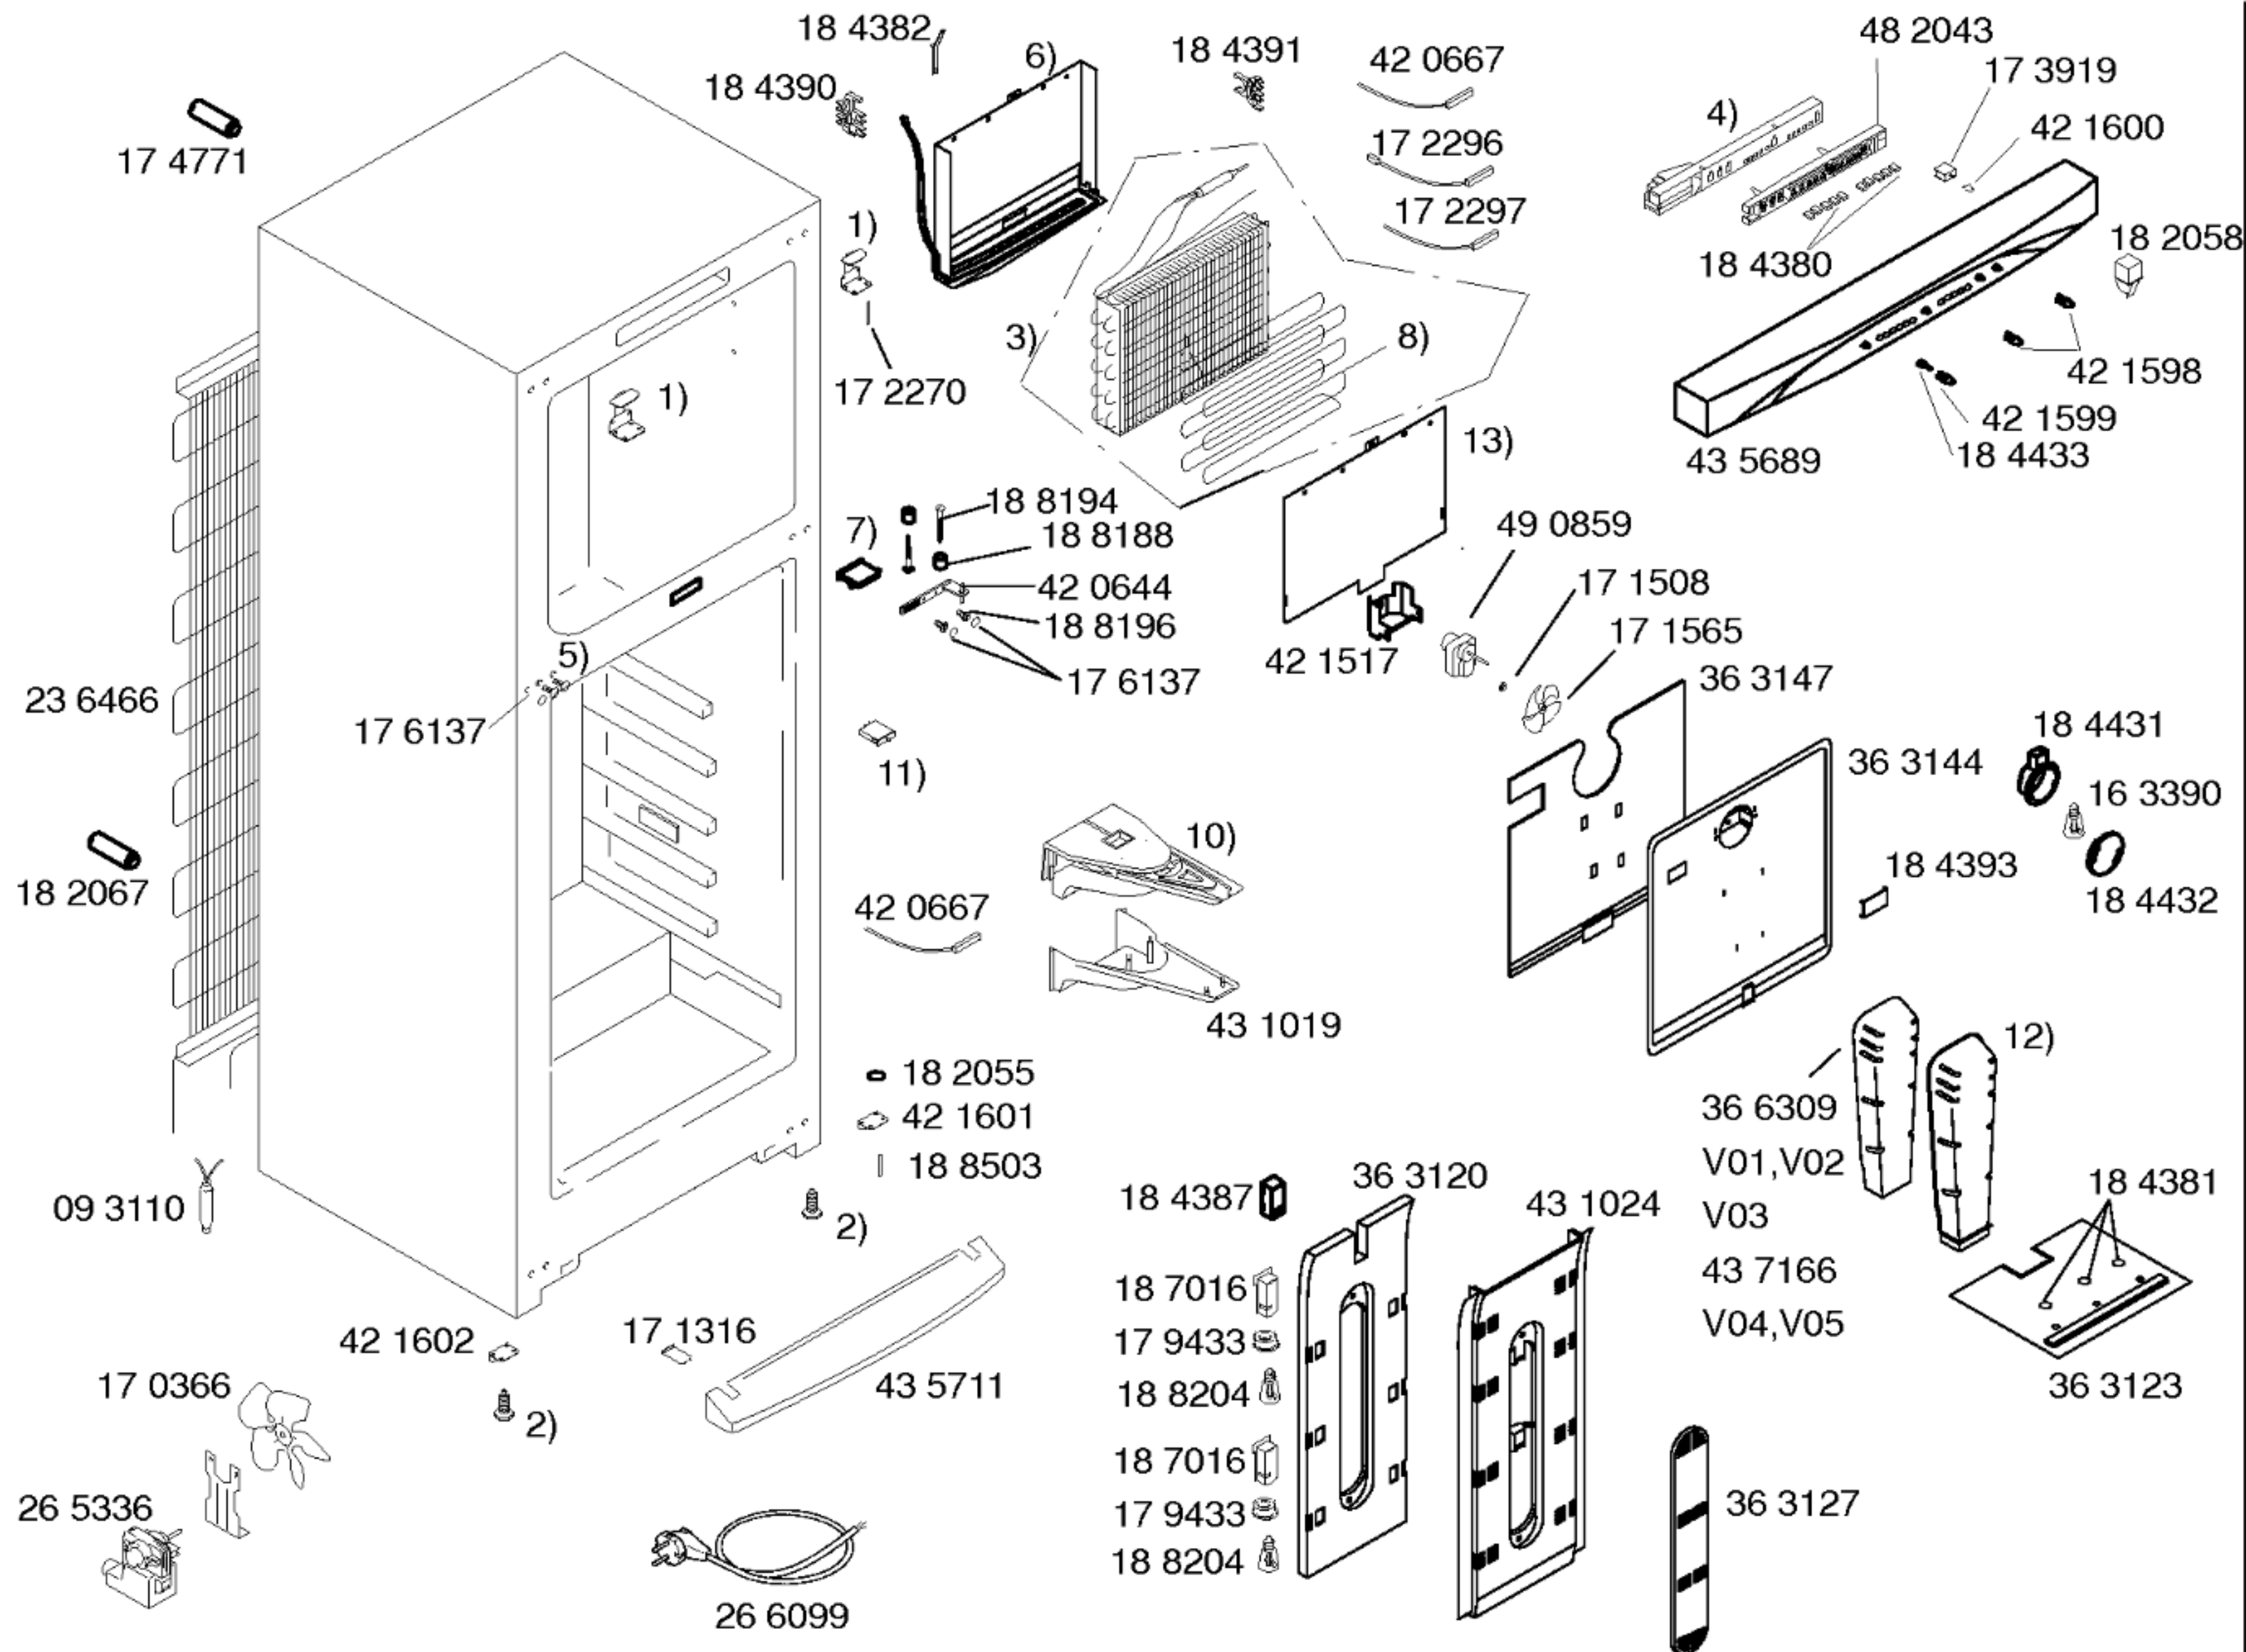

Mat. - Nr. - Konstante
3740


Gebrauchsanweisung
58 7691

- 1) 17 1312
- 2) 42 1516
- 3) 36 9815
- V01,V02,V03,V04
- 43 8726
- V05
- 4) 48 9131
- 5) 16 5552
- 6) 36 9905
- 7) 41 8128
- 8) 36 9816
- V01,V02,V03,V04
- 10) 74 1547
- 11) 17 1307
- V01
- 42 2142
- V02,V03,V04,V05
- 12) 36 3157
- V01,V02,V03,V04
- 43 7165
- V04,V05
- 13) 36 6902
- V01,V02,V03,V04

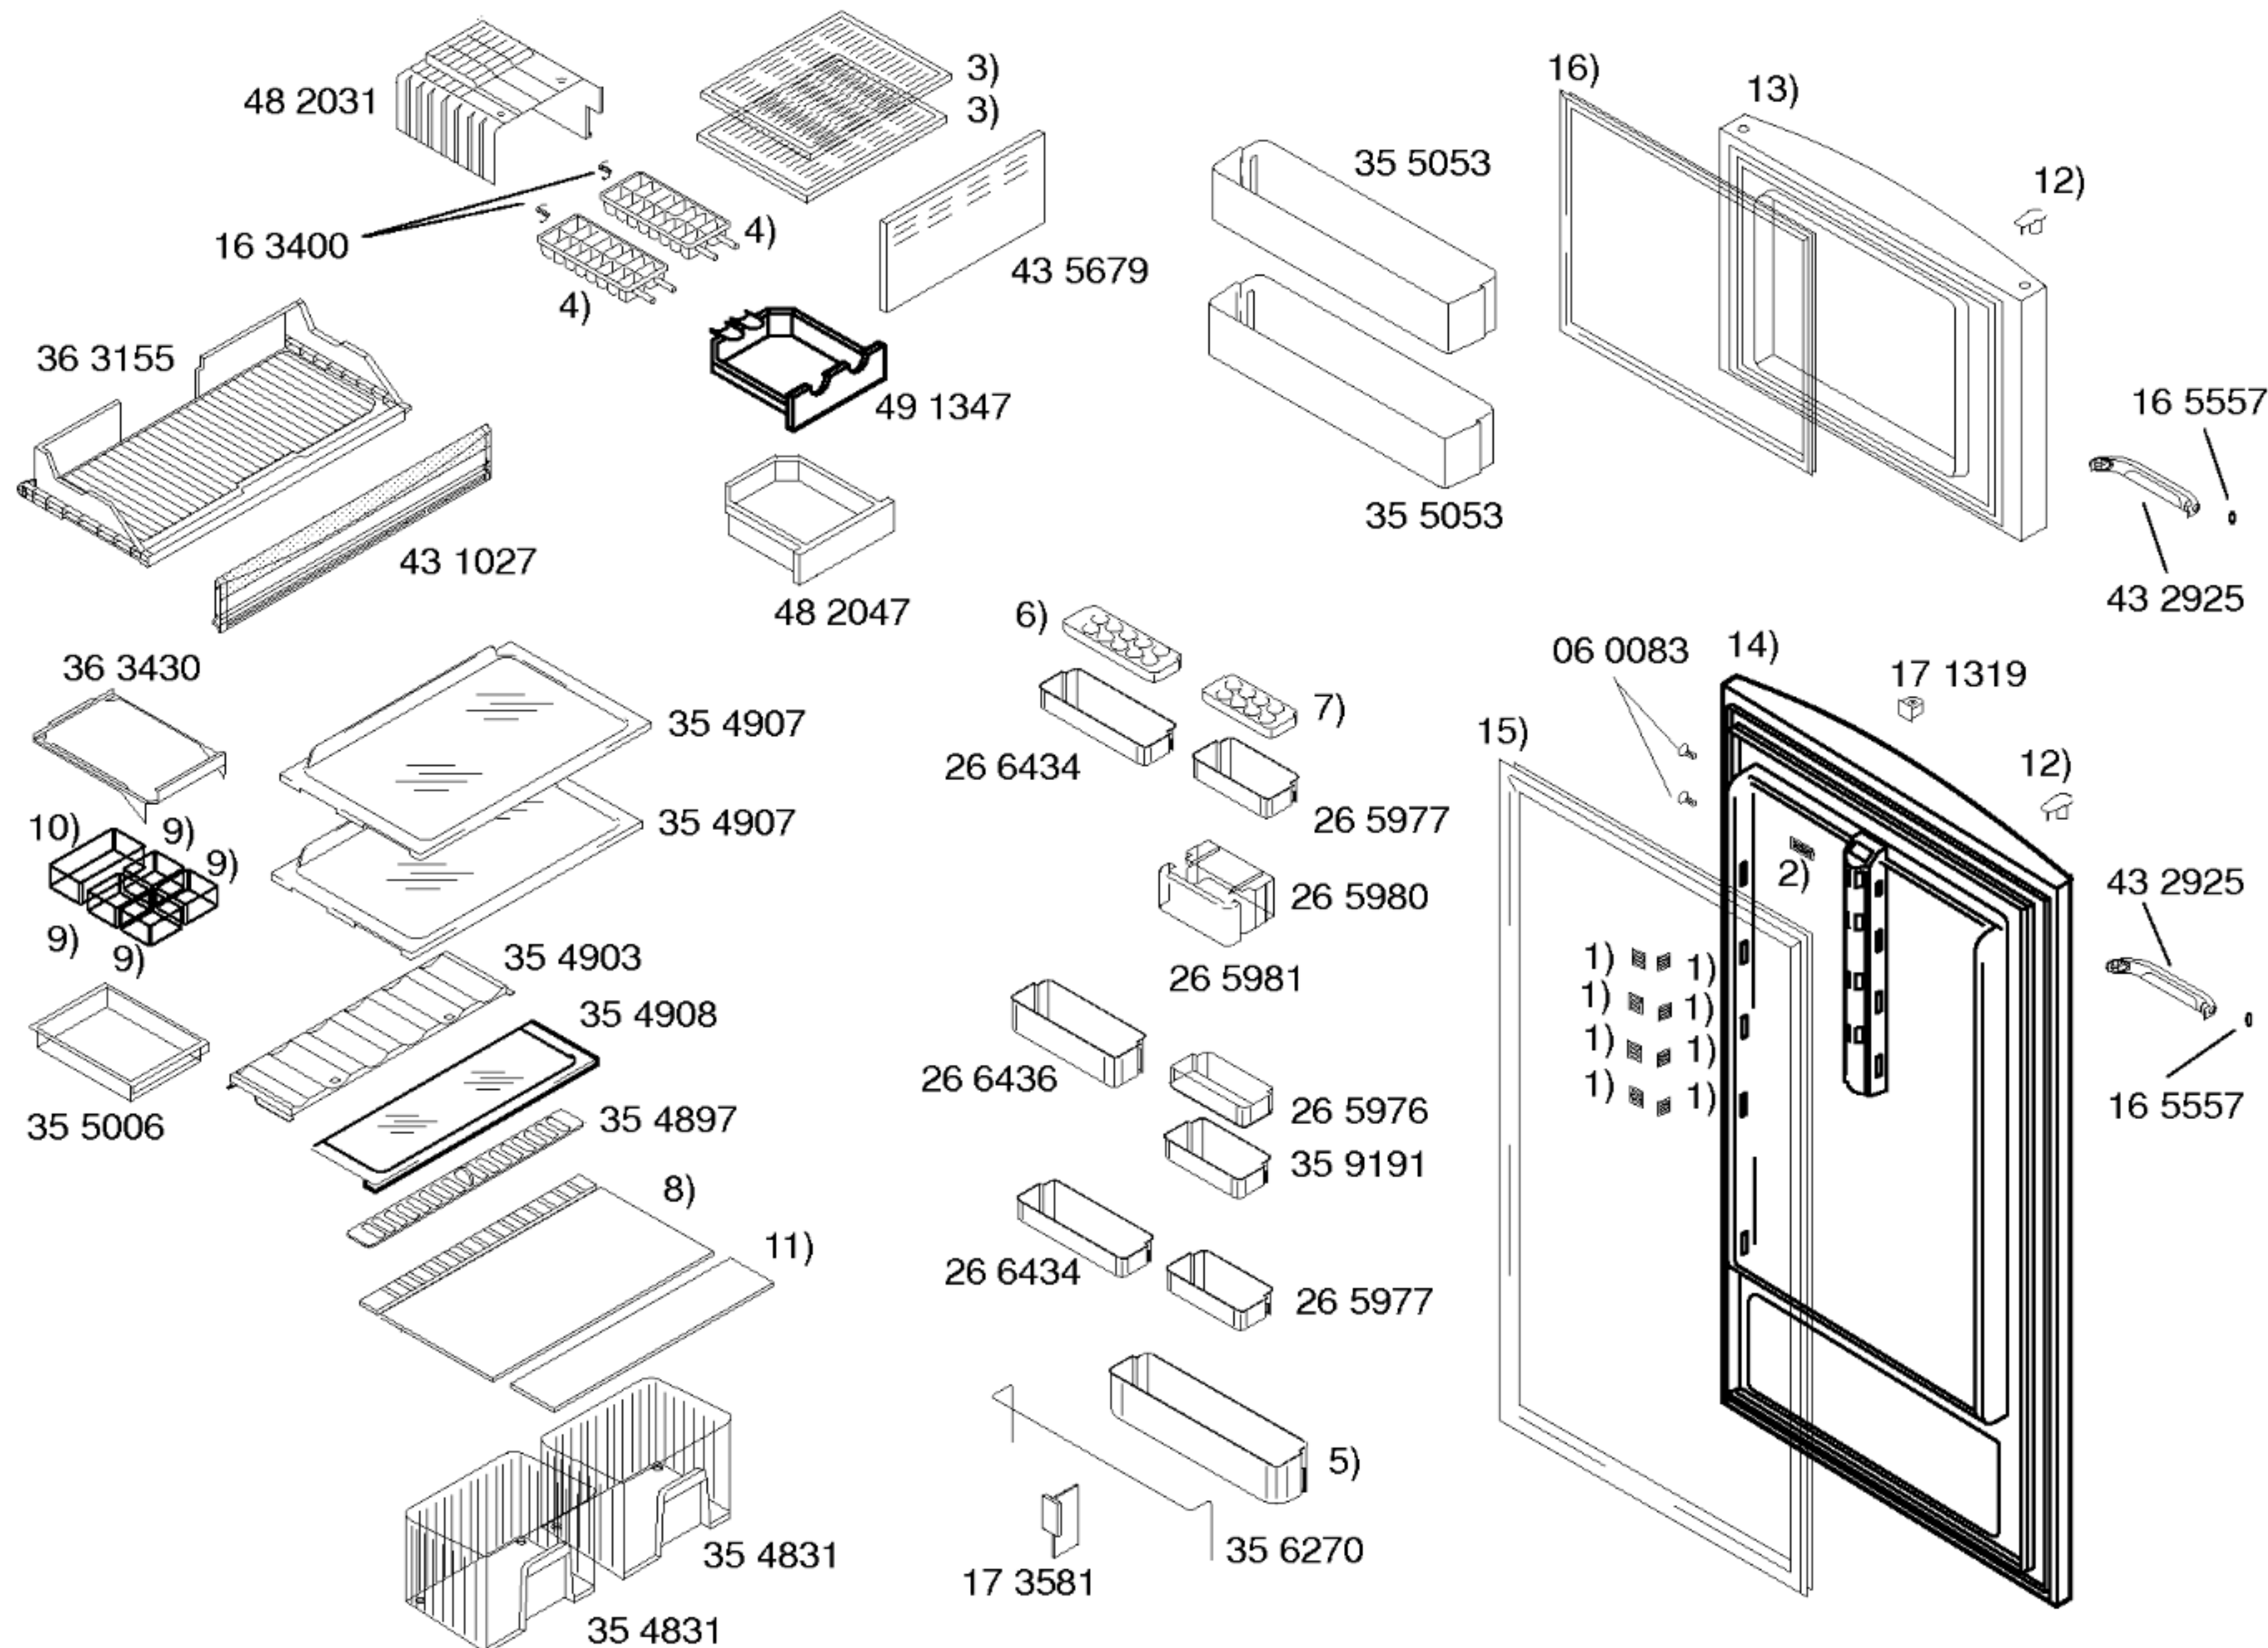

Mat. - Nr. - Konstante
3740

- 1) 41 6843
- 2) 41 6844
- 3) 36 3145
- 4) 49 1361
- 5) 35 6269
- 6) 26 7198
- 7) 26 7186
- 8) 36 1076
- 9) 48 0523
- 10) 48 0522
- 11) 35 8822
- 12) 17 1321
- 13) 47 1220
- 14) 24 0786
- 15) 23 8423
- V01,V02
- 24 1272
- V03,V04,V05
- 16) 21 8857
- V01,V02
- 47 1878
- V03,V04,V05

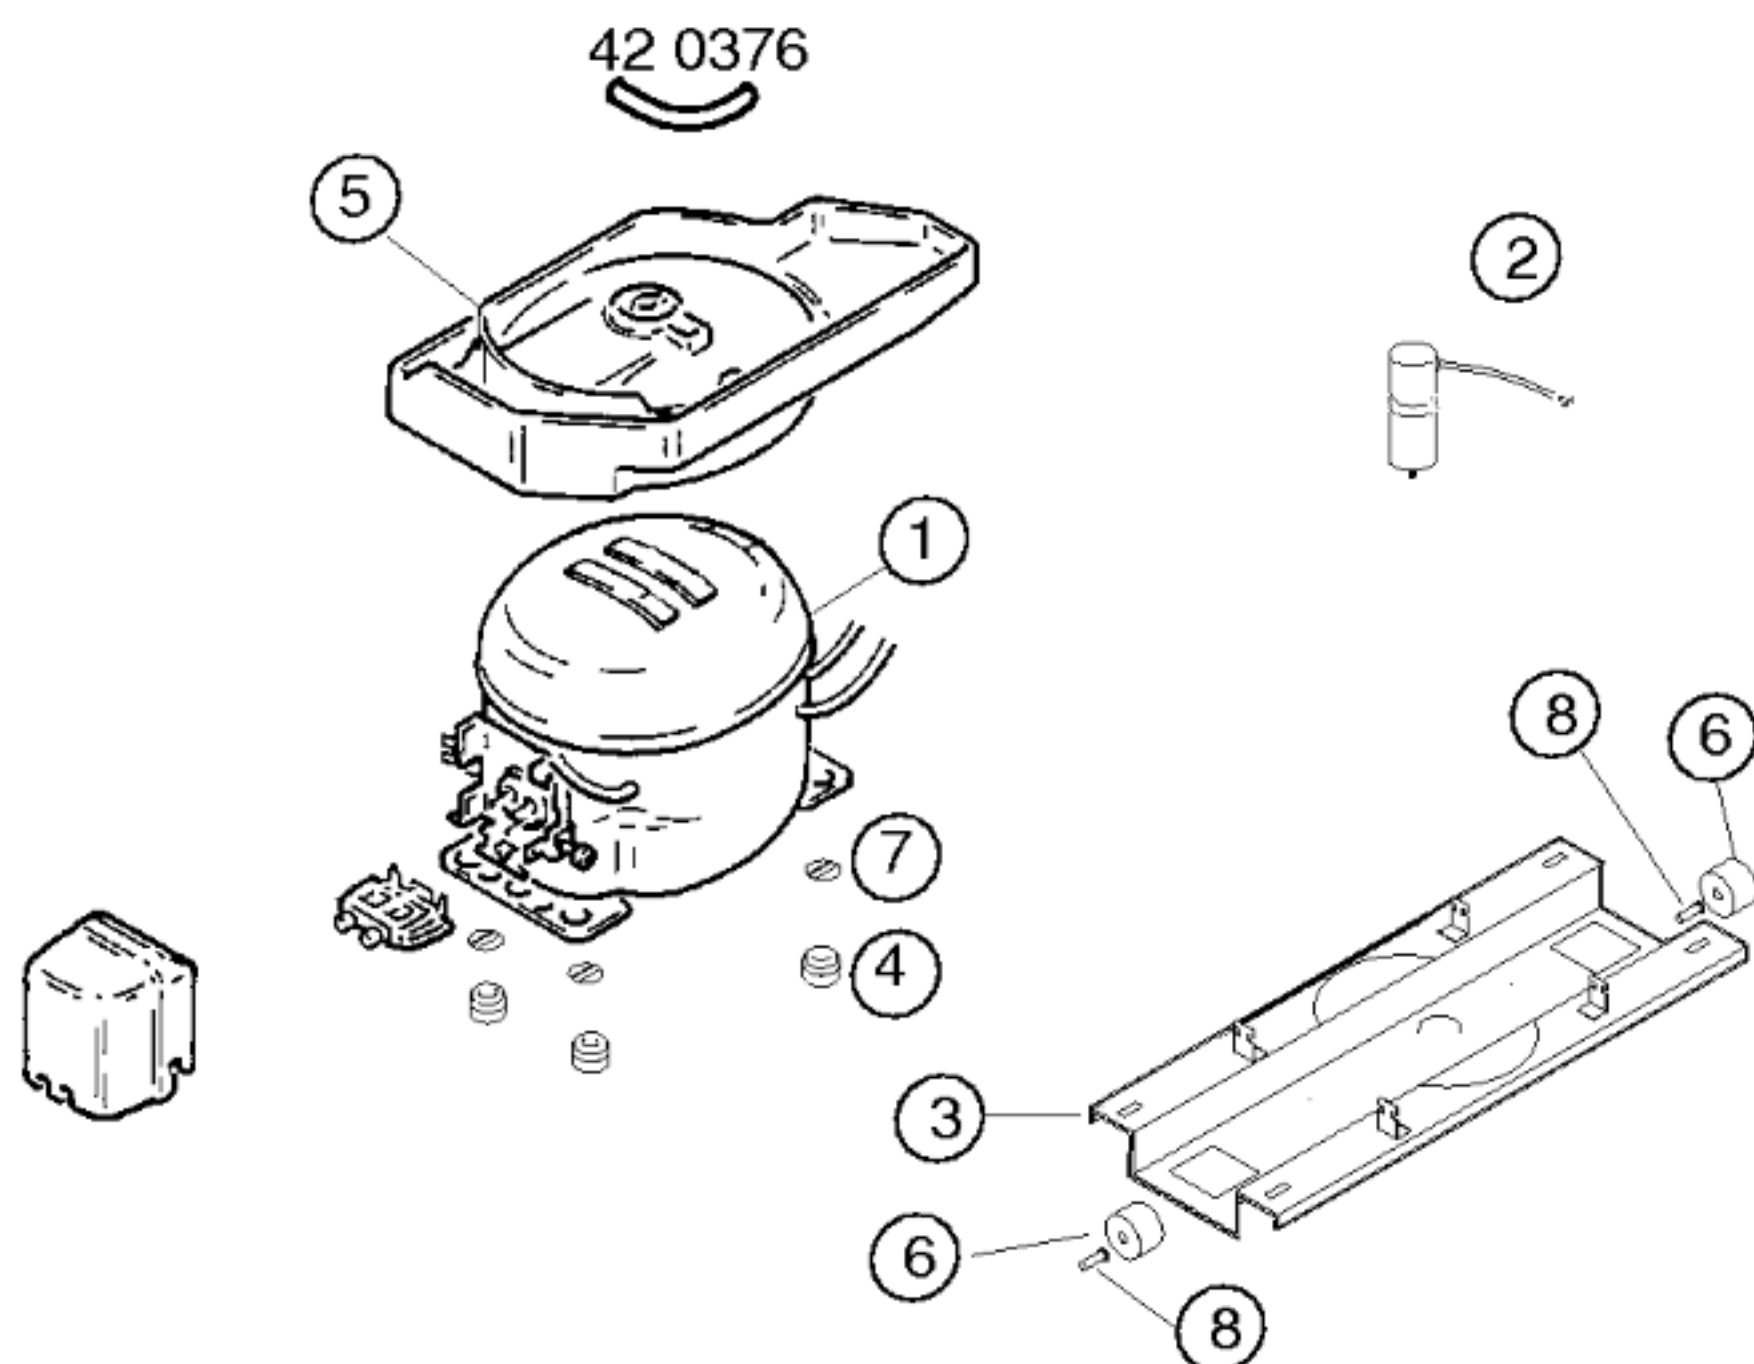

Pos.	Danfoss		
	NLE15KTK2		
1	14 2207		
2	17 4093		
3	35 4583		
4	16 3427		
5	49 1201		
6	17 1318		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER				
Verdichter/Compressor/Kompresör		Danfoss		
Typ/Type/Tip		NLE15KTK2		
Förderleistung/Delivery/Verim/h		8		
Anlaufstrom/Starting current/Giris akimi		A		
Widerstand/Resistance/Rezistans Ha/		Ω		
Hi/aux.				
Temp.Reyler/Thermostat/Termostat		Elektronisch		
Typ/Type/Tip				
Reglerstellung/Position/Termostat pozisyonu				
Schaltwerte/Actma kapama degerleri		..ein/acma °C		
Valeurs de commutation/Termostat degeri		..aus"/kapama		
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/ Dolum miktari		R600	g	60
Anschlusswert/Comm. load/Giris gucu		W	215	
Heizung/Heater/Rezistans		Ω	Verdampfer	Ablaufrinne
Widerstand/Resistance/Direnc		W	267	81
Leistung/Power/Guc				Klappe
				4
Ventilador/Blower/Vantilatör		Ω		
Widerstand/Resistance/Rezistans				
Magnetventil/Magnetic valve/Manyetik valf		Ω		
Widerstand/Resistance/Rezistans		V		
Spannung/Voltage/Gerilim				
Temp.Reyler/Thermostat/Termostat				

* Siehe Typenschild/Mamul etiketine bakiniz