


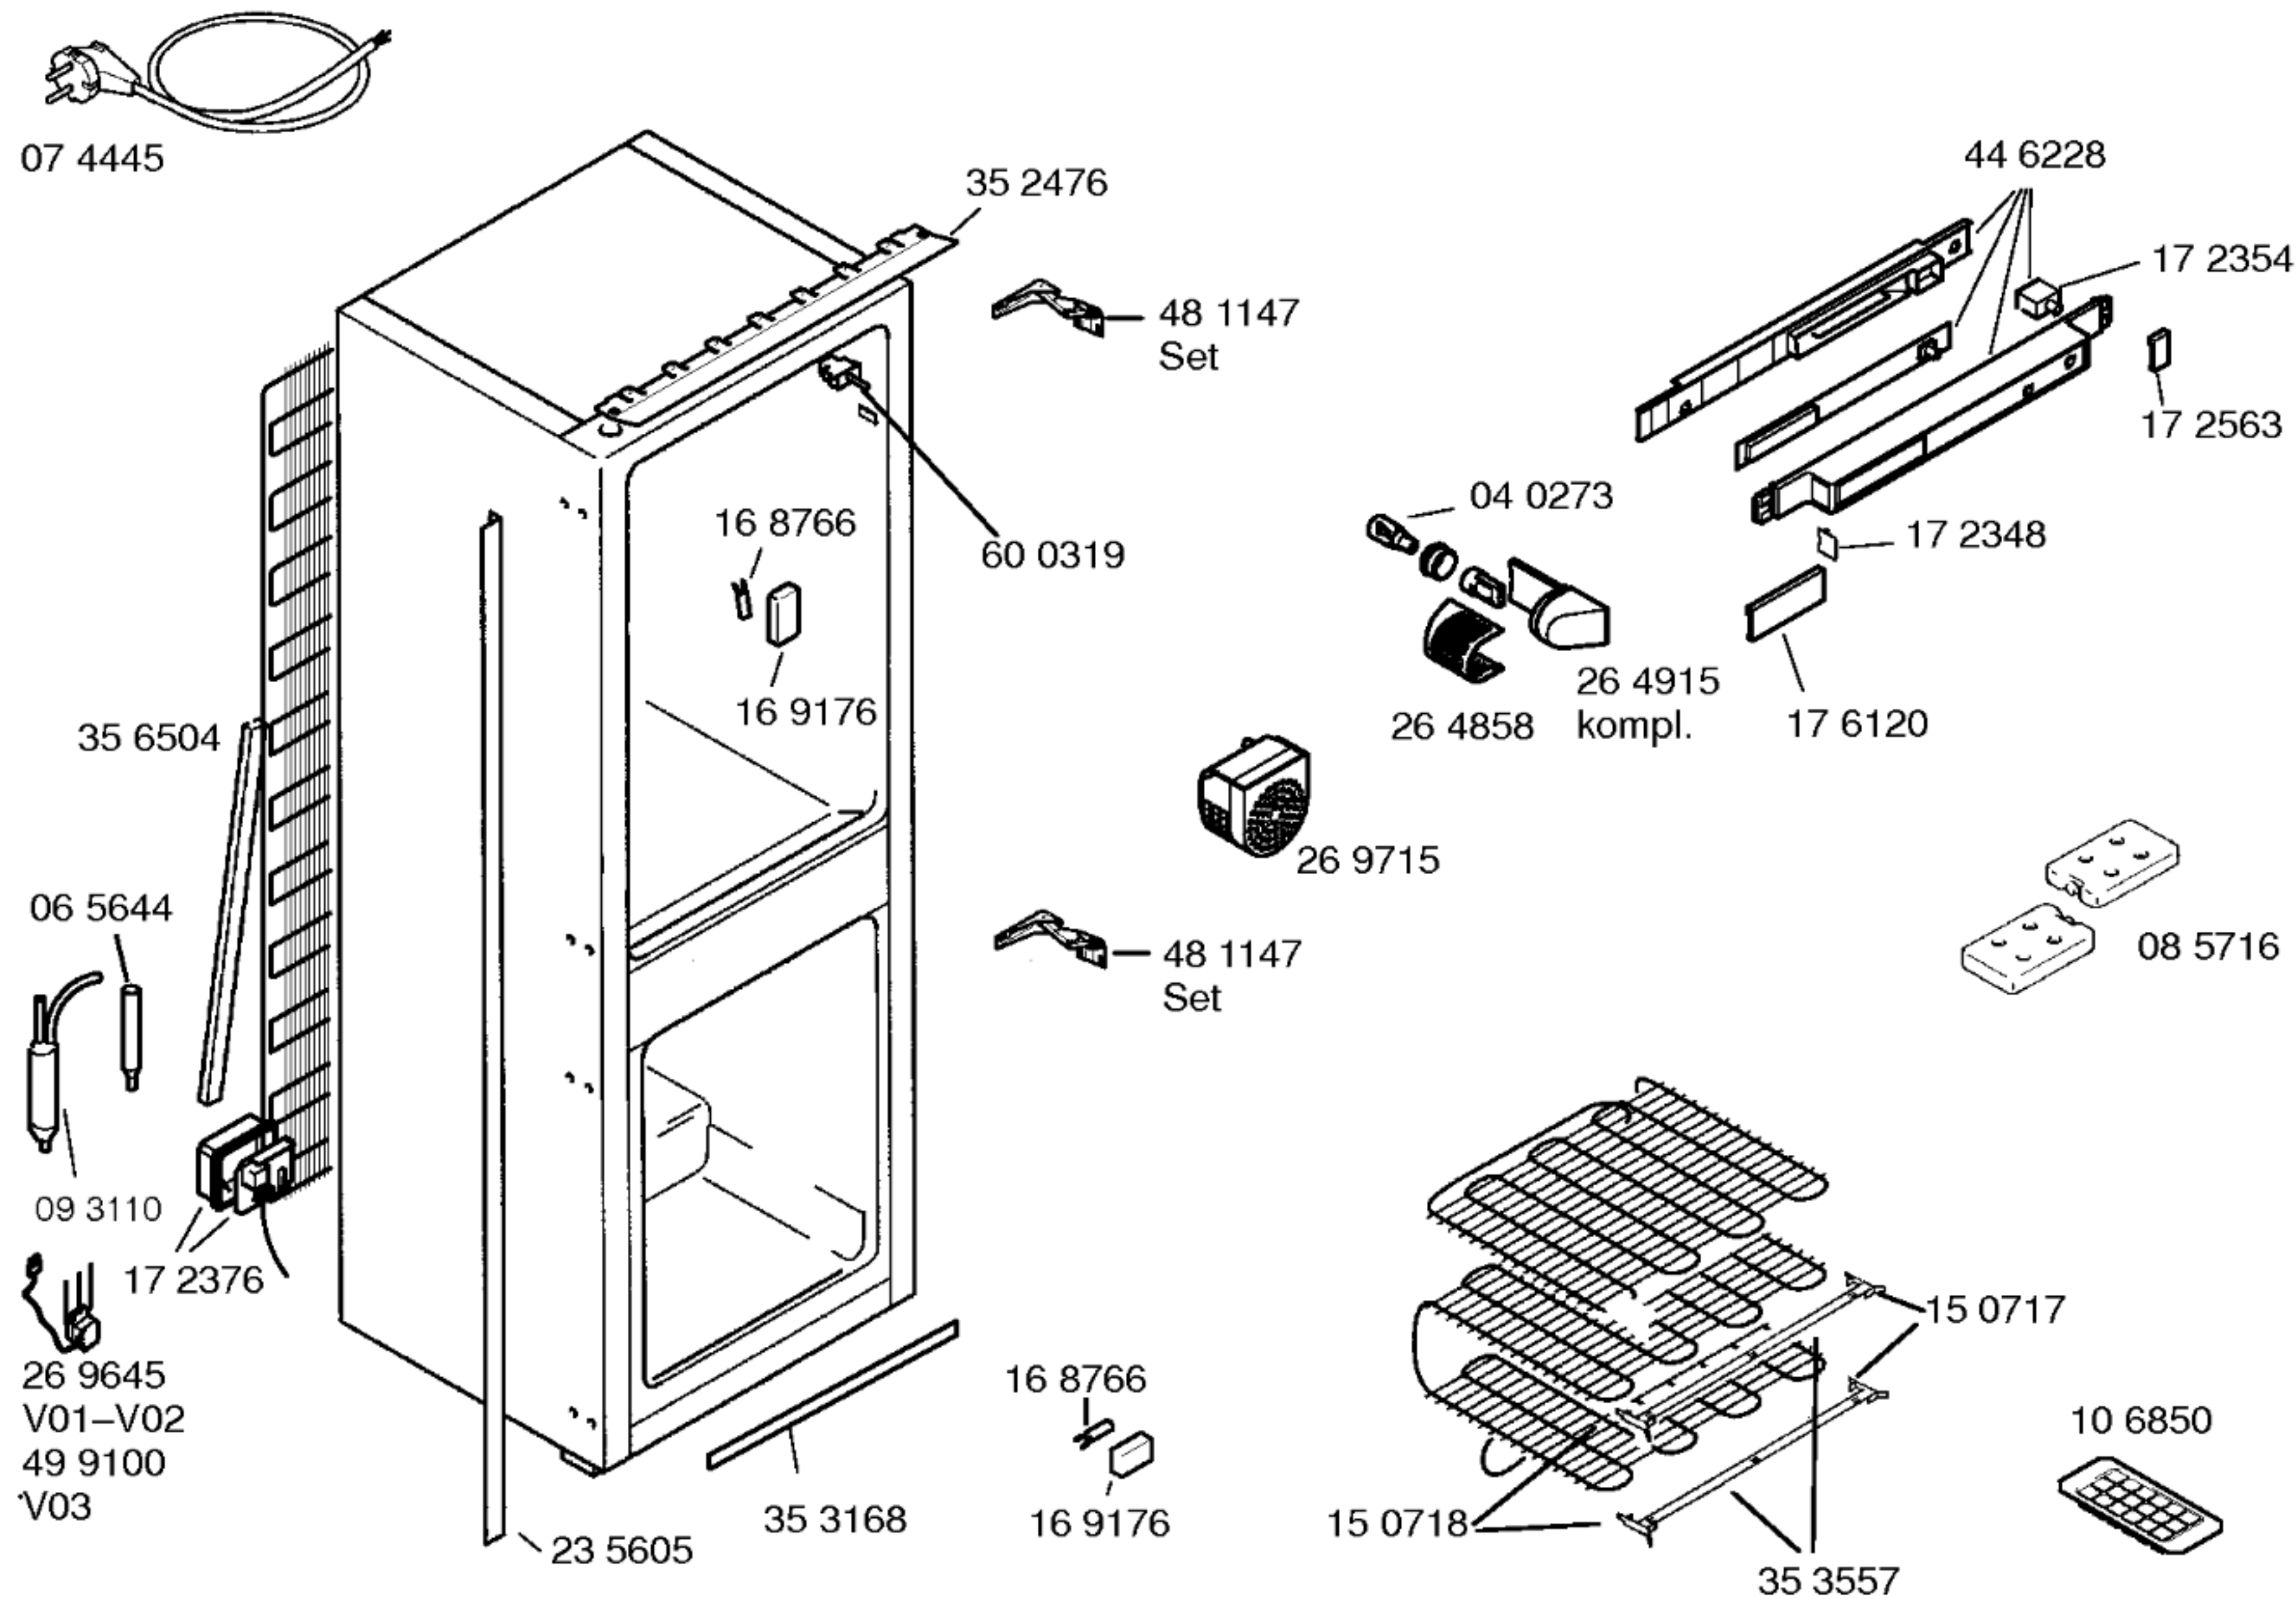



Mat. - Nr. - Konstante
3740


Gebrauchsanweisung
69 2082
(de,en,fr,it,,es,pt,el)

Montageanleitung
58 8057

Befestigungssatz
49 1365

Listerien Rep.Satz
41 7589

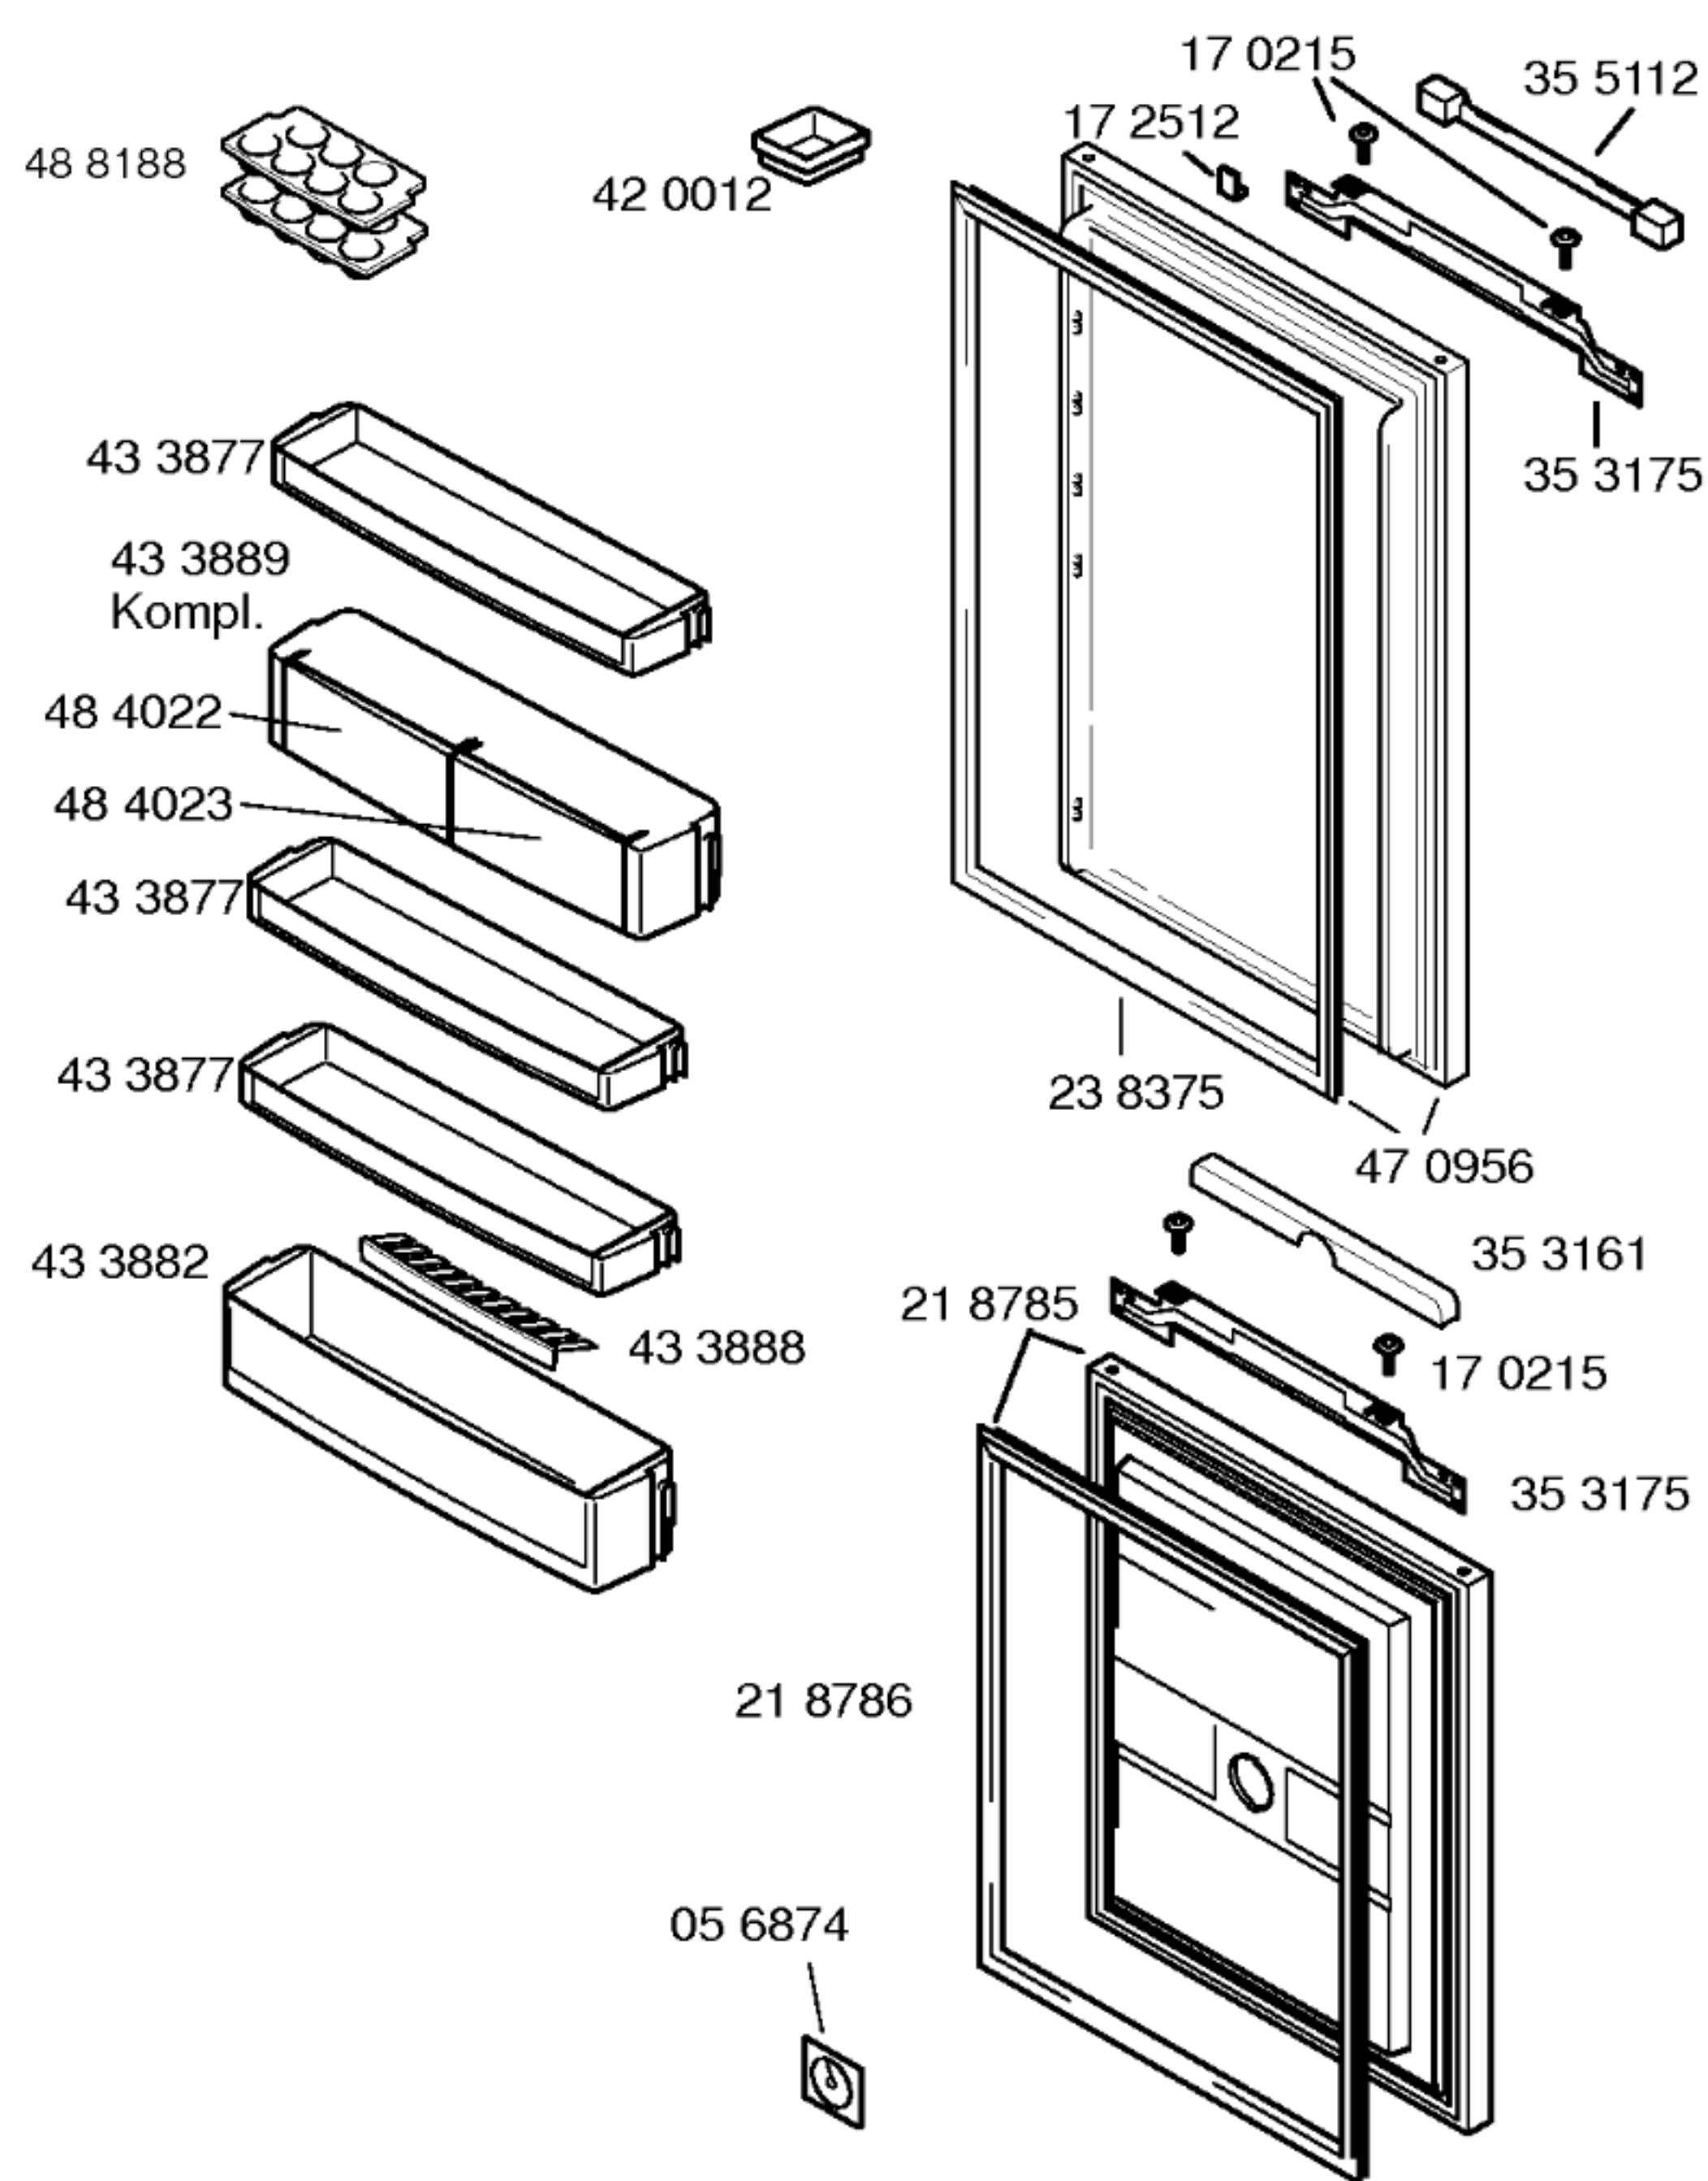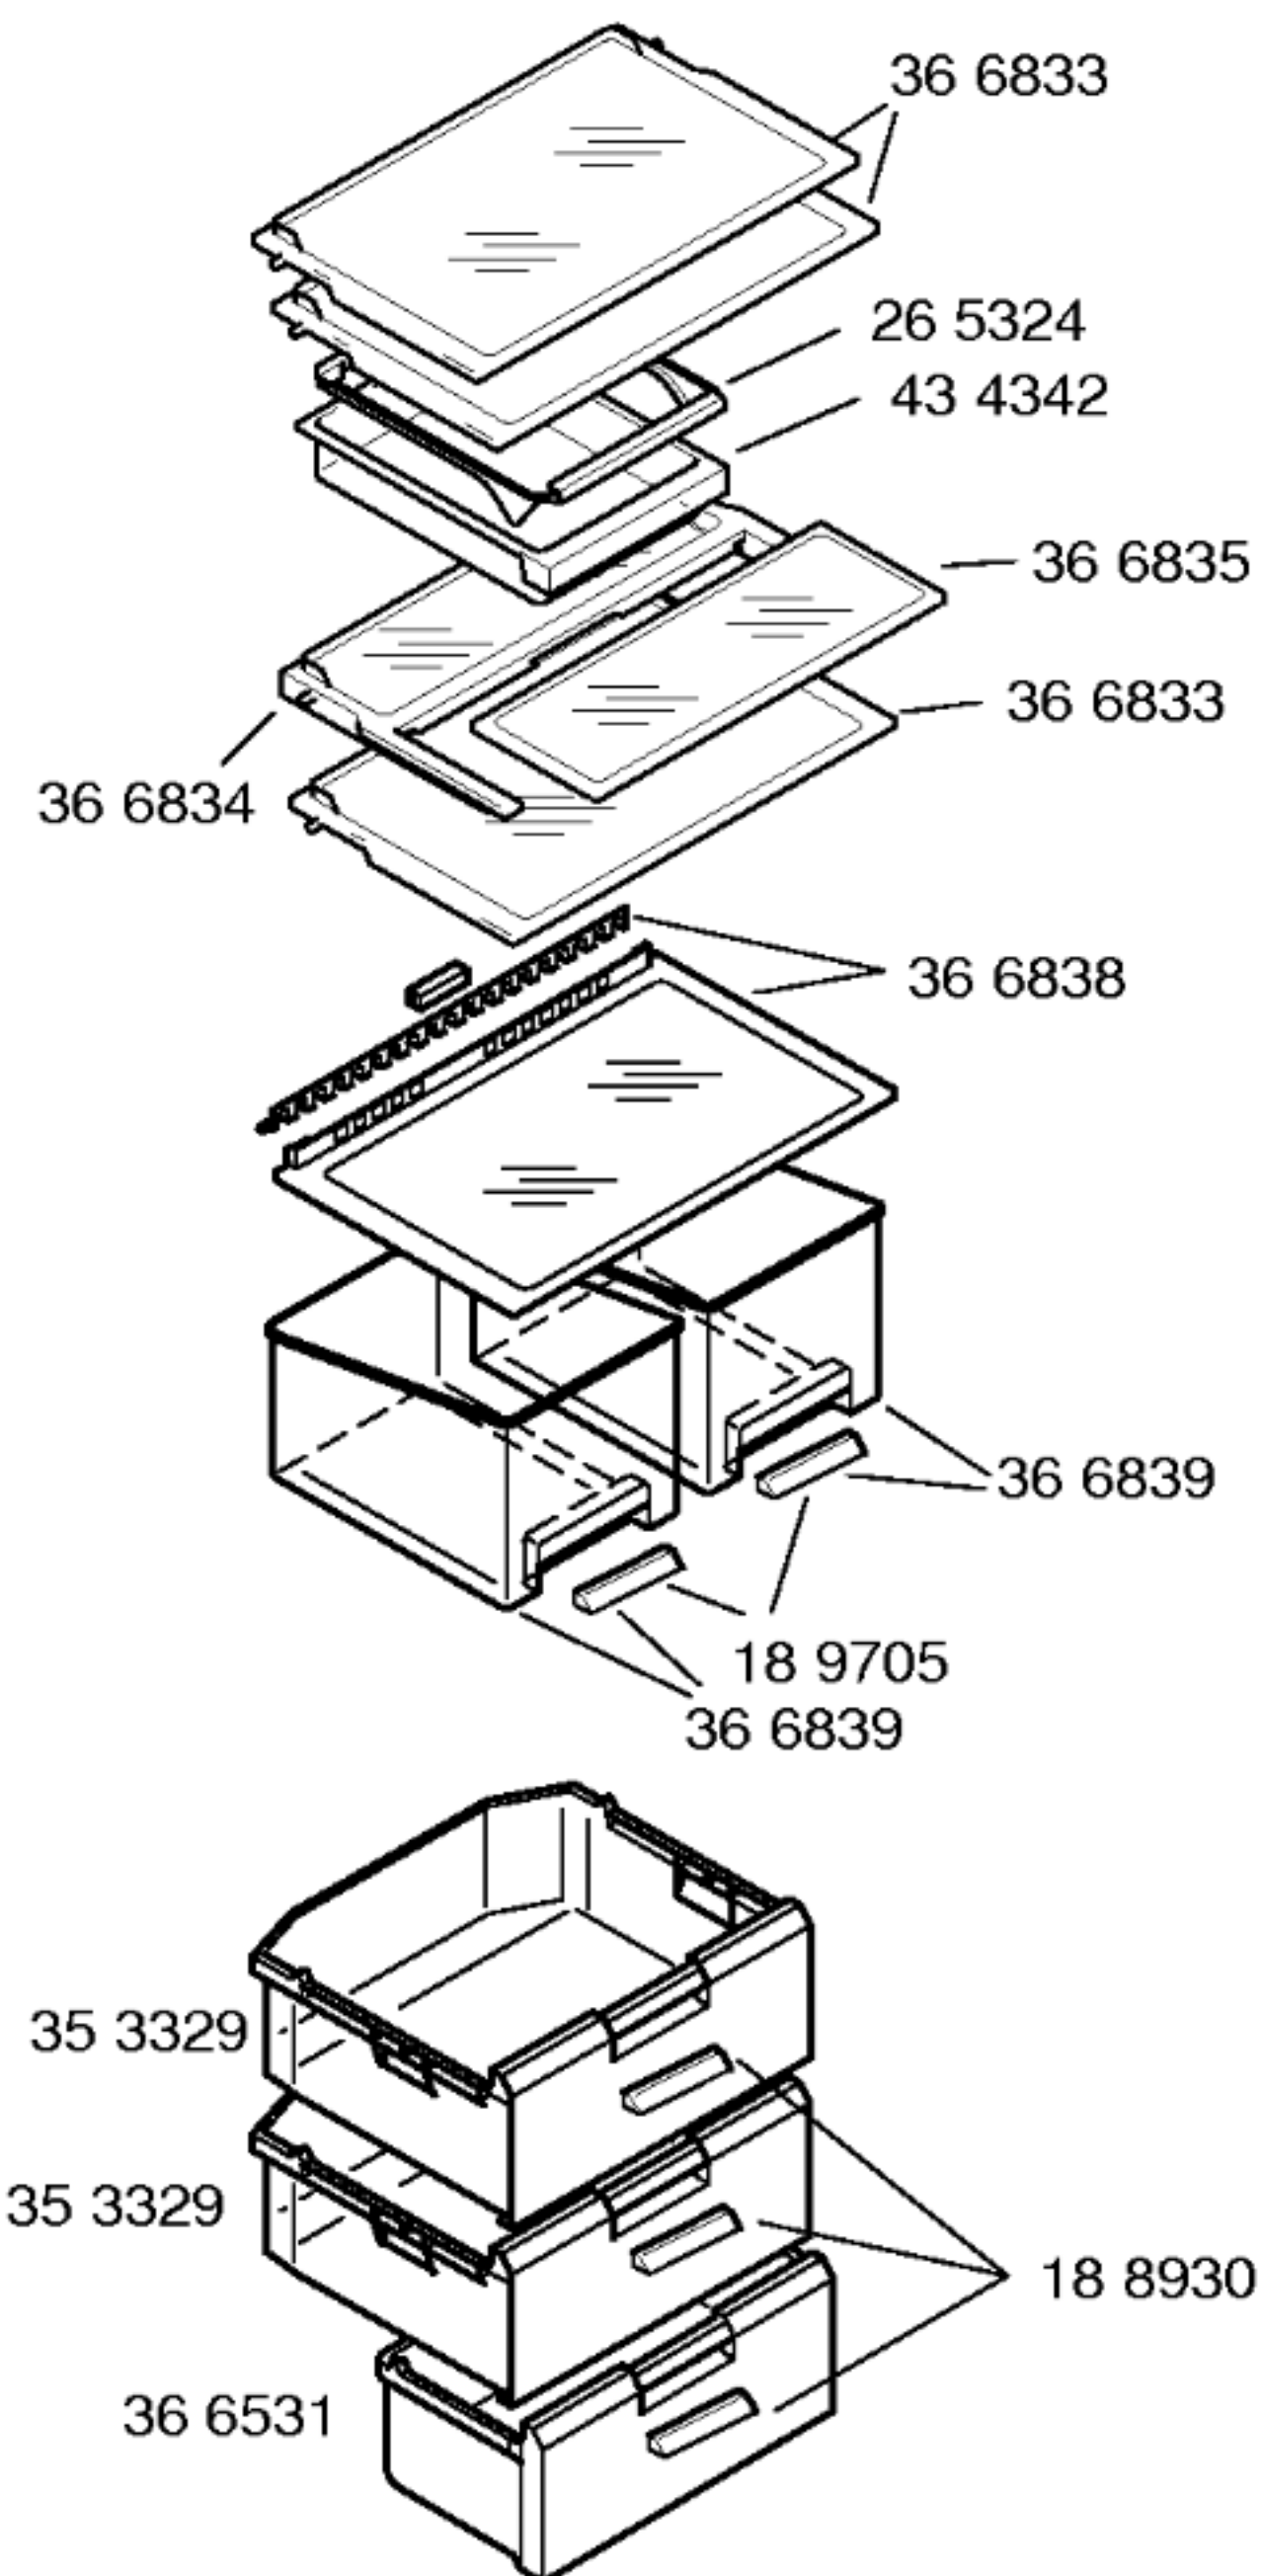

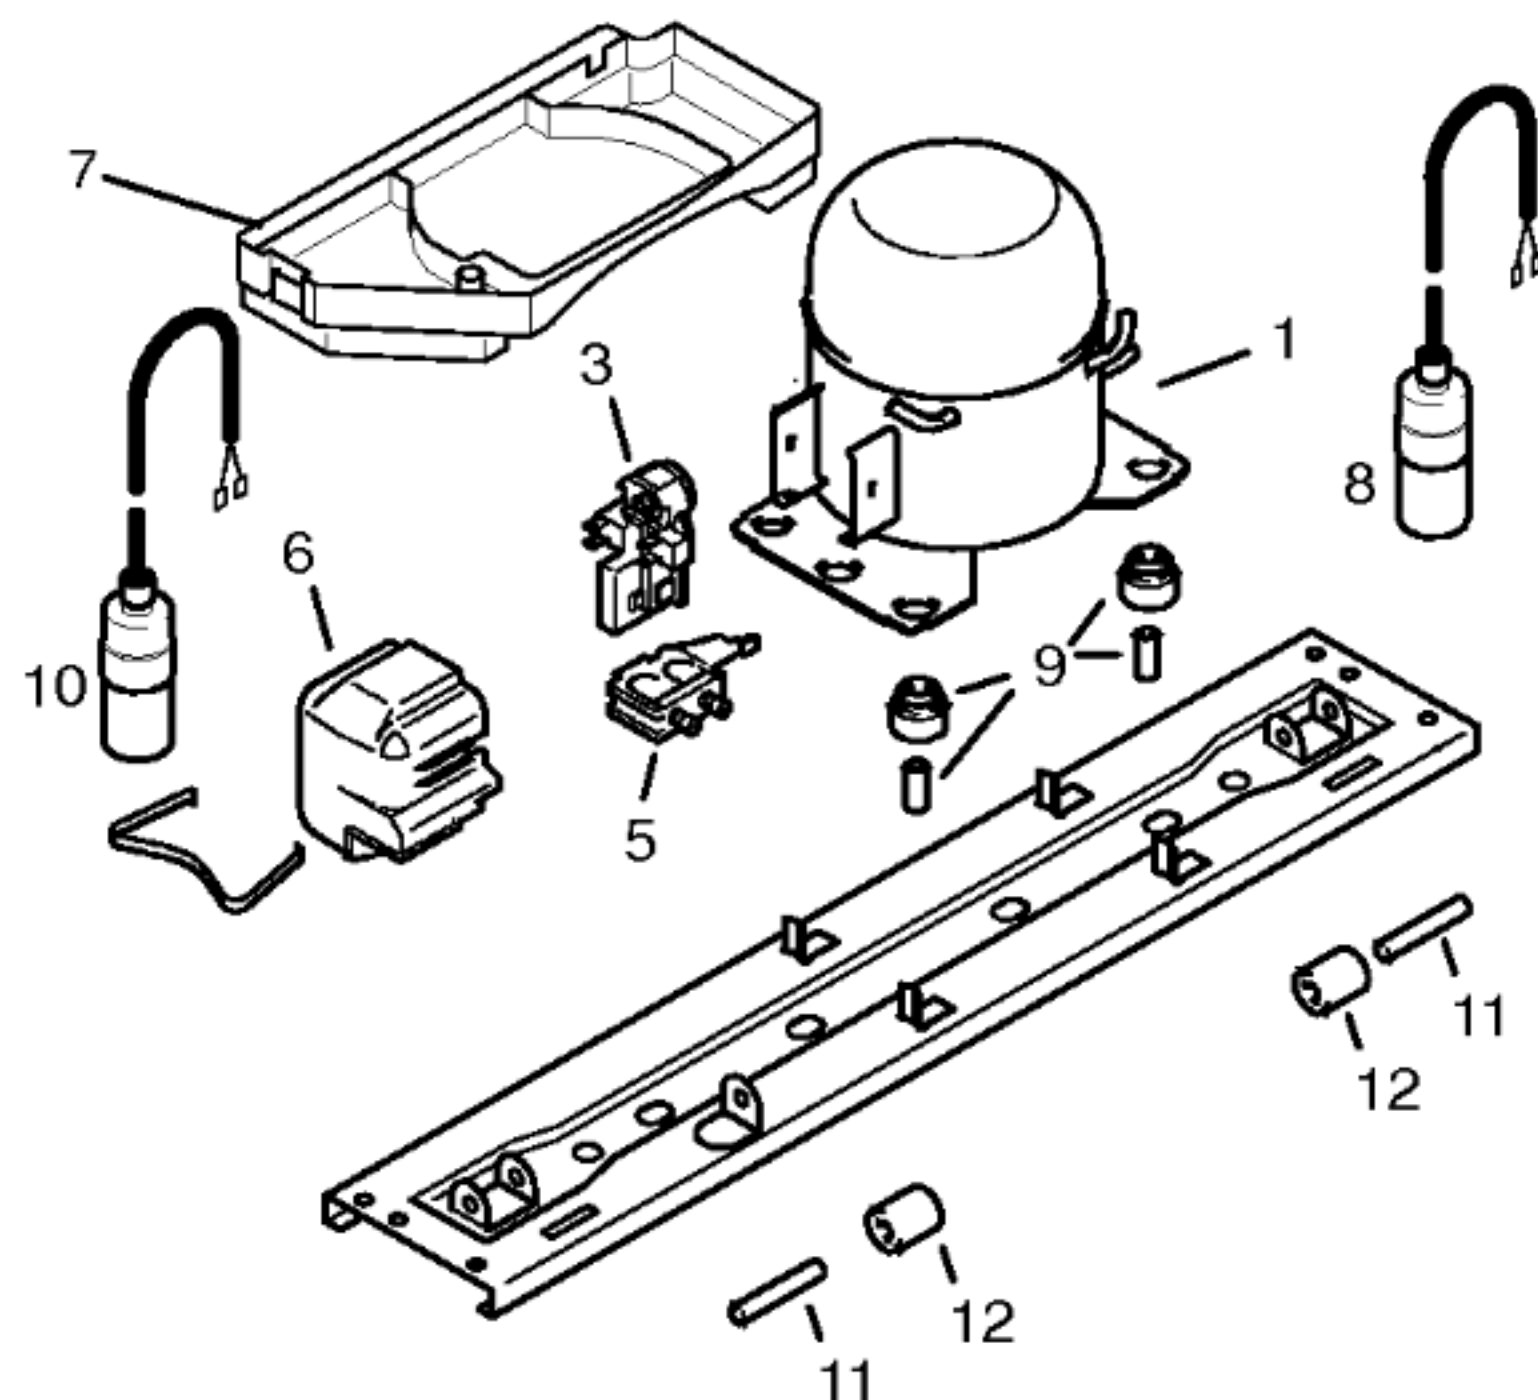

Pos.	V01		
	Matsushita		
	DGX 110 E		
1	14 2360		
2			
3	18 8959		
4			
5	18 3590		
6	41 8045		
7	26 6624		
8	41 9025		
9	05 0166		
10	16 8603		
11	01 9017		
12	01 1916		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Matsushita				
Typ/Type		DGX 110 E				
Förderleistung/Delivery/Débit		l/h	1955			
Anlaufstrom/Starting current/Cour de démarrage		A	0,5			
Widerstand/Resistance/Résistance		Ha/main/prin	W	14,7		
		Hi/aux	W	27,3		
Temp.-Regler/Thermostat			Elektronisch			
Typ/Type			EIN AUS			
Regelstellung/Position			-15 -16			
Schaltwerte/Switching values			"warm"	-19 -20		
Valeurs de commutation			"kalt"	-23 -24		
			"alarm"	-9 -14		
Füllmenge/Fill.quantity/Charge		R600a	*			
Anschlußwert/Conn.load/Puiss. connectée		W	104			
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		W	288	240		
Leistung/Power/Puissance		W	200	24		
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		W	560			
Raumtemperaturfühler		C	K	C	k	
		+10	9,9	-18	43,3	
		+ 5	12,7	-22	54,6	
		+ 0	16,3	-26	69,4	
Widerstand NTC-Fühler		°C	kW	°C	kW	°C kW
		-1	17,3	-15	36,5	-20 48,6
		-9	26,2	-16	38,8	-23 58,1
		-14	34,5	-19	45,9	-24 61,6
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		W				
Spannung/Voltage/Tension		V				

* siehe Typenschild